[INCH-POUND]
A-A-2899
March 6, 1995

COMMERCIAL ITEM DESCRIPTION

HANGERS, COAT AND TROUSER

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers steel, plastic and wood hangers.

2. CLASSIFICATION. The coat hangers shall conform to the following types, classes, and sizes as specified in contract or order.

Type I - Coat Hanger, Steel (standard)
Type II - Coat Hanger, Steel (heavy duty)
Type III - Coat Hanger, Plastic
Type IV - Coat Hanger, Wood
Type V - Trouser Hangers, Wood

Drawings listed on page 5 are not intended to be exact representations of the hangers.

Class A - Enamel finish
Class B - Bright zinc or nickel finish
Class C - Sealer, wax or varnish type finish

Size 1 - 15-3/4 in.(40cm) wide (min)
Size 2 - 16-1/2 in.(41.91cm) wide (min)
Size 3 - 16-1/2 in.(41.91cm) to 17-1/2 in.(44.45cm) wide
Size 4 - 16-7/8 in.(42.86cm) to 18 in.(45.72cm) wide
Size 5 - 9 in.(22.86cm)long, 1 in.(2.54cm) wide, 5/16 in. (7.94 mm) thick (min).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Type I. The standard (light duty) steel wire hanger shall be a one piece formed design with a shoulder bar unit, trouser bar, and suspension hook. The hanger shall be swaged (wrapped) around the base of the suspension hook. The hook radius shall completely fit over a 1-1/2 inch (3.81cm) diameter bar without binding. The wire shall be a minimum diameter of 0.089 inches (2.26cm).

3.2 Type II. The heavy duty steel hangers shall be a one piece formed design, with a shoulder bar unit, trouser bar, and suspension hook. The hanger shall be manufactured from 0.150 (3.81mm) diameter steel wire. The hanger shall be swaged (wrapped) around the base of the suspension hook with the option of forming an open eyehook. The hook radius shall completely fit over a 1-1/2 inch (3.81cm) diameter bar without binding.

3.3 Type III. Plastic hangers shall consist of either a molded unit body (shoulder piece and trouser bar) and a suspension hook, or a separately-molded shoulder piece unit and trouser bar with a suspension hook. In the latter construction, the trouser bar shall be made of the same material as the shoulder piece unit, and shall be permanently attached (shall not snapped out at either end). The minimum diameter of the hanger shall be 5/16 inch (7.94mm)

3.4 Type IV. Wood coat hanger

3.4.1 Construction. The wood coat hanger shall consist of two (2) shoulder side pieces, a trouser rod, and a suspension hook. The side pieces shall have a permanent flush or dovetail type joint.

The trouser bar shall be permanently affixed to prevent both rotational and horizontal movement to prevent roll-off of the trousers.

The swivel design suspension hook shall be a minimum overall length of 2.4 inches (6.10cm). The hook shall be centered between the two shoulder side pieces. The hook may go through the hanger and be headed, or be annular threaded at the bottom, or terminate within the junction of the shoulder pieces.

3.5 Type V. Trouser hanger

3.5.1. Construction. The trouser hanger shall be comprised of two 9 inch (22.86cm) long, 1 inch (2.5cm) wide and 5/16 inch (7.94mm) thick horizontal grooved jaws. The jaws shall be joined together by an integral non swivel suspension hook, combined with an over-center latching feature. The over-center feature shall provide a clamping action that activates the jaws of the hanger.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

The center of each jaw shall have a concave area that provides clearance for the trouser seams and allows a positive clamping action on the garment. The grooves shall extend the full 9 inch (22.86cm) length of the actual contact surfaces and shall not be less than 1/2 inch (1.27mm) in width.

The locking device shall be a positive latching, over-center design, incapable of releasing without manual operation. When in the locked position, the hook and locking device shall not interfere with the suspended trousers. When locked, the jaws shall press firmly together and the hook shall be in an upright position.

3.6 General requirements for Type IV and V hangers. The wood hangers shall be manufactured from red alder, beech, birch, cherry, maple walnut or oak. The wood shall be dried to a moisture content not to exceed 12 percent. The hangers shall be smoothly sanded and shall be free of knots, splits, splinters, sharp edges, holes or other defects which may affect appearance or serviceability.

The suspension hooks shall be minimum 11 gauge steel, finish as specified in the contract or order. Hooks shall fit completely over a 1-1/2 inch (3.81cm) diameter bar without binding. The upper end of the hook may be plain or looped back at the option of the manufacturer.

3.7 Workmanship. Hangers shall be free from any splinters, sharp edges, projections, or other defects that might snag or tear garments. Surfaces shall be free from flaws, cracked or peeling paint and other defects which impair appearance or serviceability as specified herein.

3.8 Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

3.9 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in inch-pound units, a request should be made to the contracting officer to determine the product is acceptable.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.


5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 Part Identification Number(PIN). Hangers conforming to this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the CID number, type and size. An example of the part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

AA_____A21 Example: (AA_____A21) = Type I, Class B, Size 1 hanger

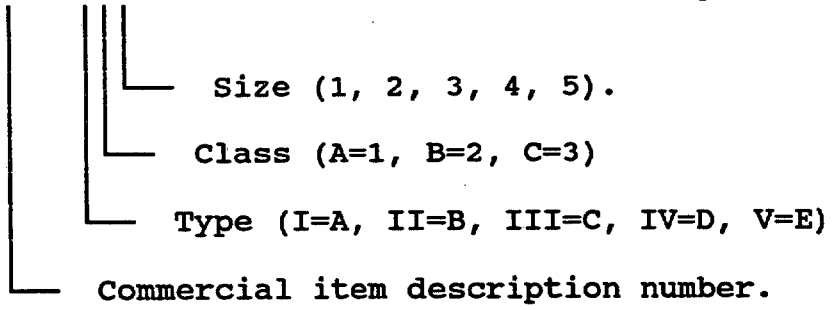


6.2 Supersession data. This commercial item description supersedes LLL-H-1142A, dated May 8, 1973, AA-528, dated September. 30, 1979, and AA-681, dated September 25, 1979.


6.3 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number, date
b. Type, class and size
c. The preservation, packing and marking desired.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

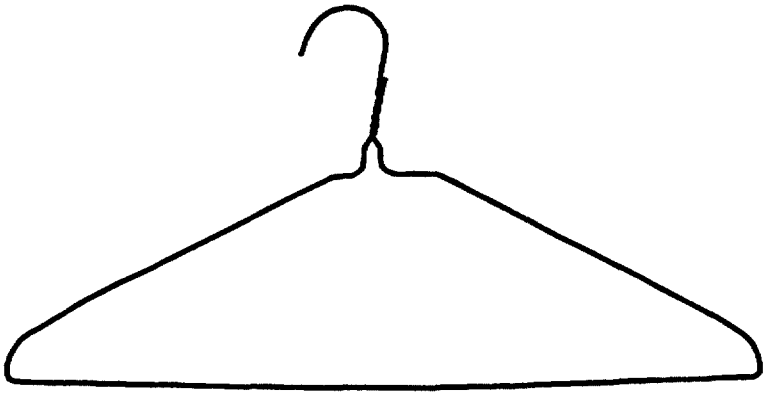


Type I

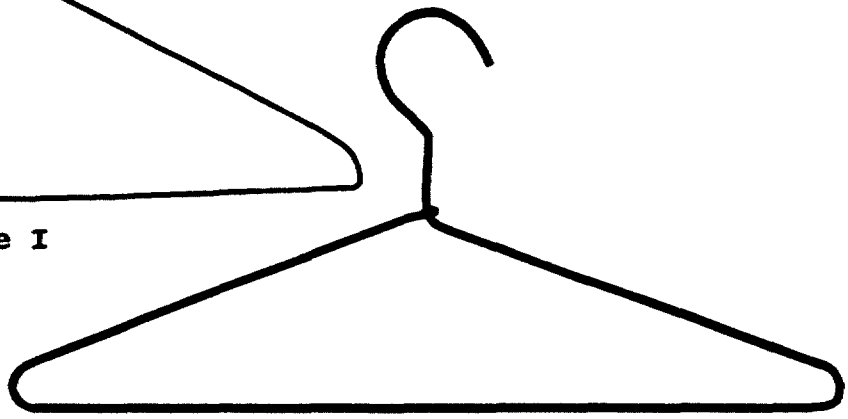


Type II

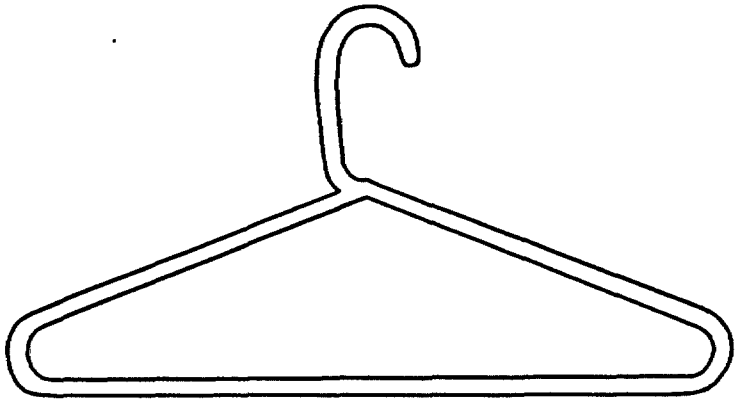

Type III

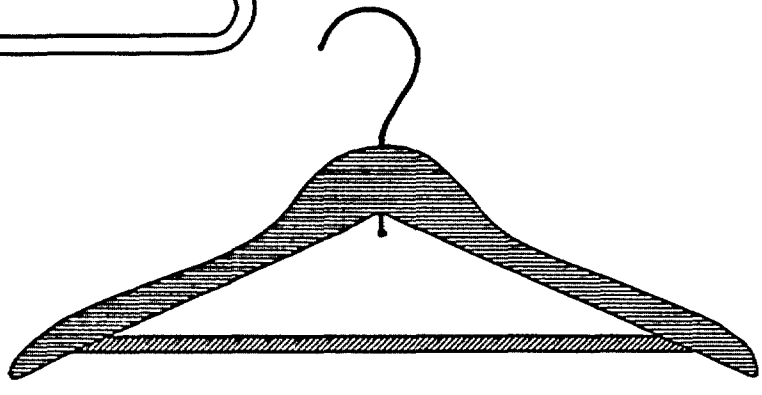

Type IV

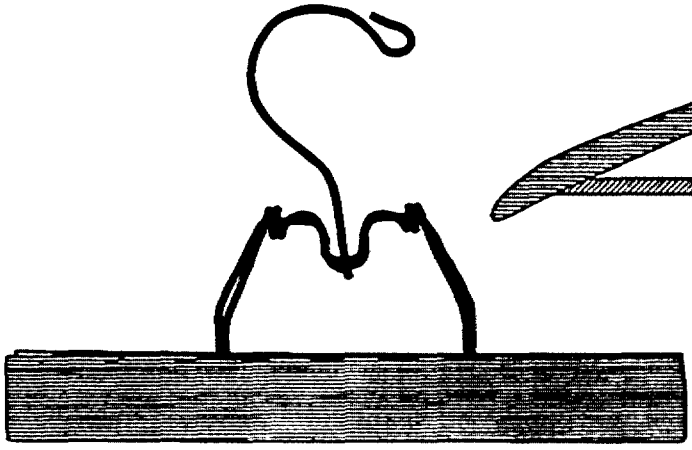

Type V

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIAN

Army - GL
Navy - SA
Air Force - 99

User Activity

Army - GL

Review Activity

Air Force - 84

Preparing Activity

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.