[INCH-POUND]
A-A-2930
April 1, 1996
SUPERSEDING
GGG-R-180
January 21, 1992

COMMERCIAL ITEM DESCRIPTION

REAMER, HAND, TAPER PIN

The General Services Administration has authorized the use of this Commercial Item Description for procurement of the Type VIII, Classes 1 and 2 reamers specified in GGG-R-180 for all federal agencies.

1. SCOPE

This Commercial Item Description covers taper pin reamers used in reaming hole diameters to specified tolerances.

2. CLASSIFICATION

Class 1 - Straight Fluted.
Class 2 - Spiral Fluted.

3. SALIENT CHARACTERISTICS

3.1 Class 1.

3.1.1 Design. The hand reamer shall have straight flutes, straight round shank with squared end, and shall be right-hand and ground. The reamer shall be similar to figure 1 (A), and conform to the dimensions specified in ANSI B94.2, table 24 and its applicable tolerances (see 7.2).

3.2 Class 2.

3.2.1 Design. The hand reamer shall have spiral flutes, straight round shank with squared end and shall be left hand and ground. The reamer shall be similar to figure 1 (B), and conform to the dimensions specified in ANSI B94.2, table 24 and its applicable tolerances (see 7.2).

3.3 Material. Unless otherwise specified (see 7.2), the reamer shall be made of Molybdenum base types M1, M2, M7 or M10 high speed steel.

3.4 Construction. The cutting section shall taper 1/4 inch per foot. The cutting edges shall be properly relieved and the flutes shall provide for chip clearance. Flute spacing shall be in accordance with the manufacturer's standard practice. The shank shall be integral or joined to the reamer by welding, and shall be concentric with the cutting edges within 0.001 inch total indicator reading (tir) as measured between centers.

Beneficial comments, recommendations, additions, clarification, etc. and any data which may improve this document should be sent to: General Services Administration, Federal Supply Service, Tools and Appliances Commodity Center (6FETE-CO), Washington, DC 20406.

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

3.5 Hardness. The full length of the cutting edges of the reamer shall be hardened and tempered to a Rockwell hardness value from C61 to C67. When required to be tested, the reamer shall be tested for hardness in accordance with ASTM E18.

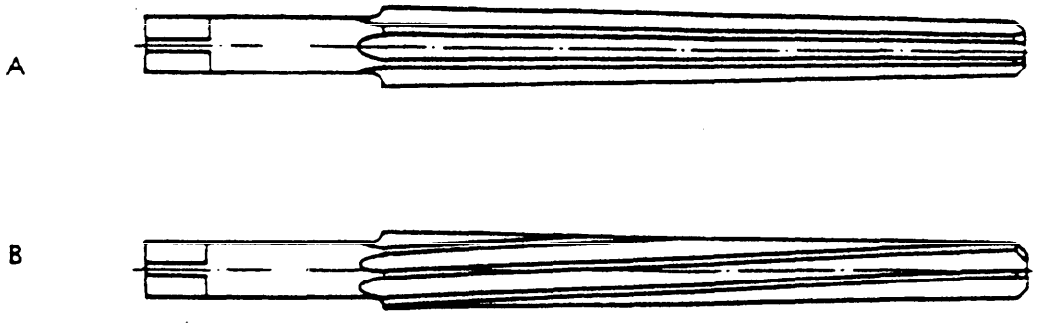


Figure 1. Taper Pin hand Reamer

3.6 Performance. The reamer shall cut freely and produce smooth and accurate holes when subjected to hand reaming a minimum of 25 holes in a steel plate of at least 1/2 inch thickness. The testing steel shall conform to FED-STD-66, AISI Number 4140 or 4150, and shall have a Brinell hardness value from 235 to 285. The starting holes shall be 0.002 to 0.003 inch smaller than the small diameter of the finish-reamed hole.

3.7 Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Paints, coatings, platings, and finishes shall be smooth adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be free from manufacturing workmanship defects (e.g. sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety or appearance.

3.8 Identification marking. The reamer shall be marked with the manufacture's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All identification markings shall be engraved, etched, molded, or indented directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item. The reamer shall be marked with the words "High Speed" or the abbreviation "HS".

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified (using conversion tables contained in the latest revision of Federal Standard 376) and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the Contracting Officer to determine if the product is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Contractor certification. The contractor shall provide certification and maintain substantiating evidence that all items being offered for acceptance meet the requirements of this Commercial Item Description and conform to the manufacturer's drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as provided for under the provisions of the contract.

5.2 Responsibility for inspection. Unless otherwise specified, the contractor is responsible for the performance of all inspection requirements and may use any commercial facilities (including the contractor's own facilities) suitable for performance of the inspection requirements, unless disapproved by the Government. The Government reserves the right to perform any of the inspections deemed necessary to assure the item conforms to the specified requirements.

5.3 Bid sample(s). When a bid sample requirement is specified in the solicitation, the bid sample(s) shall be inspected for all salient characteristics. A failure of any bid sample to meet the salient characteristics shall be cause for rejection.

5.4 First article sample(s). When a first article requirement is specified in the contract, the first article sample(s) shall be inspected for all salient characteristics. A failure of any first article sample to meet the salient characteristics shall be cause for rejection.

6. PACKAGING

Requirements for preservation, packing and marking shall be as specified in the contract or order.

7. NOTES

(This section contains information of a general or explanatory nature that is not mandatory.)

7.1. Addresses for obtaining copies of reference documents.

Federal Specifications: Federal Supply Service Bureau, Specification Section, Suite 8100, 470 L'Enfant Plaza, SW, Washington, DC, 20407.

Federal Acquisition Regulations (FAR): Government Printing Office Superintendent of Documents, Washington, DC 20401-9371.

ANSI/ASQC Z1.4: American Society for Quality Control, PO Box 3005, 611 E. Wisconsin Ave., Milwaukee, WI 43201-4606.

ASME B94.2: the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.

ASTM E18. American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and shall include the following information in procurement documents:

(a) Title, number, and date of this Commercial Item Description.
(b) Class and reamer size.
(c) Type of material required if other than specified.
(d) When applicable, the appropriate NSN.
(e) If bid samples are required and the number of samples required.
(f) If first article samples are required and the number of samples required.
(g) If lot sampling inspections are required and the applicable lot sampling requirements. For example:

Sampling for Inspection. Sampling for inspection (both examinations and testing) shall be in accordance with ANSI/ASQC Z1.4.

Examinations. Each sample tool shall be examined for all salient characteristics. The Inspection Level shall be S-3 with an Acceptable quality level (AQL) of 2.5 percent defective.

Testing. Each sample tool shall be tested for all salient characteristics. The Inspection Level for the hardness test shall be S-2 with an Acceptable quality level (AQL) of 2.5 percent defective. The Inspection Level for the performance test shall be S-2 with an Acceptable quality level (AQL) of 4.0 percent defective.

(h) What preservation, packaging, and marking are required.

7.3 National Stock Numbers (NSNs). NSNs shown may not be indicative of all possible NSNs associated with this CID:

Class 1:

Reamer Size	NSN: 5110-00-	Reamer Size	NSN: 5110-00-	Reamer Size	NSN: 5110-00-
7/0	253-3152	0	243-2004	6	253-3176
6/0	253-3154	1	243-2005	7	253-3178
5/0	253-3156	2	243-2006	8	555-1205
4/0	253-3158	3	253-3170	9	253-3182
3/0	253-3160	4	253-3172	10	253-3184
2/0	243-2003	5	243-2007		

Class 2:

Reamer Size	NSN: 5110-00-	Reamer Size	NSN: 5110-00-	Reamer Size	NSN: 5110-00-
7/0	253-3151	0	253-3163	6	253-3175
6/0	253-3153	1	253-3165	7	253-3177
5/0	253-3155	2	253-3167	8	253-3179
4/0	253-3157	3	253-3169	9	253-3181
3/0	253-3159	4	253-3171	10	253-3183
2/0	253-3161	5	253-3173		

Military Interests:
None: DoD has no registered interest in in revisions and notices to this Commercial Item Description until further notice.

Preparing Activity
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:27Z
Check the source to verify that this is the current version before use.