METRIC

A-A-50601
14 January 1993
Superseding
MIL-A-17053E(SHIPS)
3 November 1967

COMMERCIAL ITEM DESCRIPTION

AUDIO ENTERTAINMENT DISTRIBUTION EQUIPMENT

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for MIL-A-17053E(SHIPS) which is cancelled.

Abstract

This Commercial Item Description covers requirements for an audio entertainment distribution system that incorporates paging features. Integral components include a central switching/control/amplification equipment complex plus remote output station equipment that drives headphones and speakers. The system is intended for use to distribute audio entertainment programs and paging announcements to speakers at group listening stations and to headphone jacks for use at personal listening stations.

Salient Characteristics

1. Audio program inputs. The audio entertainment distribution system shall accept a minimum of eight stereo audio program inputs unless otherwise specified in the contract or order. The equipment shall accept program inputs provided in a standard EIA SE-104 line-level format.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Commander, Naval Sea Systems Command, SEA 05Q42, 2531 National Center Building 3, Washington, DC 20362-5160.

FSC 5830

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

2. Paging inputs. The audio entertainment distribution system shall accept a minimum of two paging inputs provided in a standard EIA SE-104 line-level format.

3. Switching. The system shall include switching that makes all audio input programming selectably available at each output channel. The capability to provide the same output simultaneously over both the left and right channels from a single monaural program source shall be provided.

4. Audio program outputs. The audio entertainment distribution system shall provide the number of stereo (i.e., two-channel) outputs specified in the contract or order. The outputs shall be provided in a standard EIA SE-104 70 V line-level format.

5. Power output. Minimum power output shall be at least 150 Watts rms per channel.

6. Frequency response. Frequency response shall be from 50 Hz to 12 KHz at ±3 dB, or better.

7. Total harmonic distortion. Total harmonic distortion shall be less than two percent.

8. Regulation. Variations between full load and no load shall not cause the output voltage to vary by more than ± 3 dB at any frequency from 50 Hz to 12 KHz.

9. Signal-to-noise ratio. The signal-to-noise ratio of the system, from inputs to listening station outputs, shall be at least 60 dB.

10. Crosstalk. The crosstalk suppression between any two channels in the system shall at least 60 dB.

11. Dynamic range. The dynamic range of the system shall be at least 60 dB.

12. Tone controls. The system shall include separate bass and treble tone controls for each output channel. Bass control range shall be at least ± 12 dB at 100 Hz, and treble control range shall be at least ± 12 dB at 7.5 KHz with respect to a nominal 1000 Hz reference frequency.

13. Volume controls. The system shall include a separate volume control for each channel. Volume control range shall be from 0 percent to 100 percent of maximum output.

14. Keyed muting control. The system shall include a keyed muting control that enables the simultaneous muting of all output channels. The systems shall accept a switch-closure discrete signal as the muting key. A muting indicator light shall be provided on the front panel of the equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

and shall illuminate whenever muting is in effect.

15. Attenuation control. The system shall include an attenuation control that enables the simultaneous attenuation of all output channels. The attenuation level shall be 13 ± 3 decibel (dB).

16. Output monitoring. The audio entertainment distribution system shall include an output level meter and a headphone output jack. The headphone output shall have an impedance compatible with 400-ohm headsets. All of the audio program outputs shall be selectably available for driving the output level meter and headphone output jack.

17. Overload protection. All input and output electronics shall be overload protected so that no equipment will be damaged if input or output rated levels are exceeded.

18. Power. The equipment shall be nominally powered by 115 volts, 60 Hz, single phase electrical power. An ac input on/off power switch shall be provided. Input power shall be fused.

19. Personal listening station equipment sets. Personal listening station (PLS) equipment sets shall include:

(a) One stereo channel selector on/off switch.
(b) One standard subminiature stereo headphone jack (EIA 331).
(c) One volume control.

The PLS channel selector switch shall enable user to select any one of the system channel outputs and shall be labeled as to function. The PLS volume control shall cover a range of from 0 to 100 percent of full output power wherein full power supplied to the PLS shall be 50 mW and the headphone impedence will be 3000 ohms. The number of PLS equipment sets required shall be as specified in the contract or order.

20. Group listening station equipment sets. Group listening station (GLS) equipment sets shall include:

(a) One output channel selector switch.
(b) One volume level control.
(c) One headphone jack (EIA 331).
(d) One headphone volume control.
(e) Speaker on/off switch.

The GLS channel selector switch shall enable user to select any one of the system channel outputs and shall be labeled as to function. The GLS volume control shall cover a range of from 0 to 100 percent of full output power wherein full power supplied to the PLS shall be 150 watts per channel at a 70 V line level. The number of GLS equipment sets required shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

21. Physical characteristics. The distribution system equipment dimensions shall be within 92 mm in height and 77 mm in depth. The equipment shall be mountable in a standard 480 mm equipment rack (see EIA-RS-310) either directly or via an adapter. The combined weight of all of the distribution system components, excluding cable and PLS and GLS hardware, shall not exceed 180 Kg.

22. Temperature. The system equipments shall meet the stated accuracy requirements over an operational temperature range of from 0 degrees C to +50 degrees C.

23. Safety. The equipments shall be UL approved for safety.

Quality assurance provisions

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements

The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practical.


Preservation, packaging, packing, labeling, and marking.

Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Identification numbers

The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

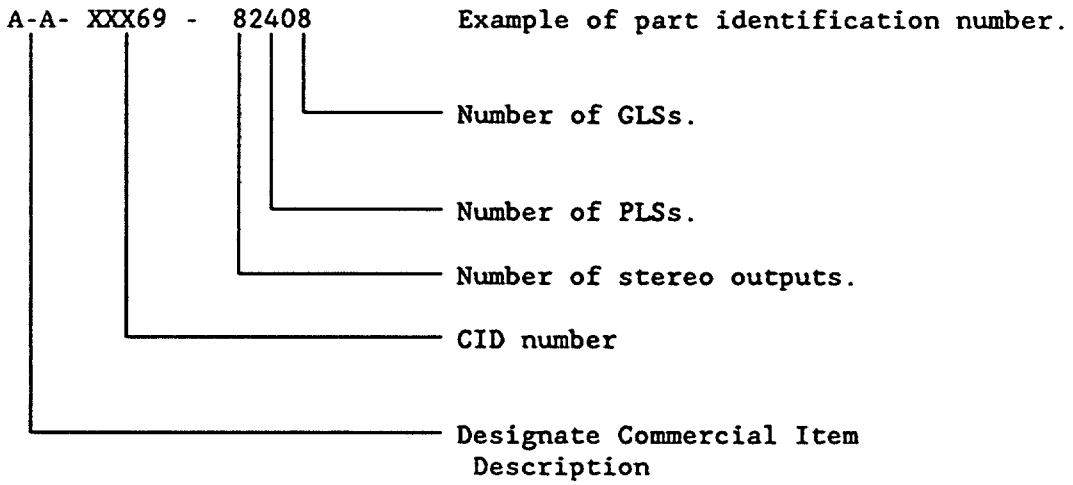

Notes.

1. Ordering data. Procurement documents should specify the following:

   a. Number of stereo inputs.
   b. Number of stereo outputs.
   c. Number of PLSs.
   d. Number of GLSs.
   e. Preservation, packaging, packing, labeling, and marking instructions.

MILITARY INTERESTS:

Custodians:
Navy - SH
Coast Guard - CG

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA-FSS

Preparing Activity:
Navy - SH
Project 5830-N095

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-50601	2. DOCUMENT DATE (YYMMDD) 1-14-93

3. DOCUMENT TITLE
AUDIO ENTERTAINMENT DISTRIBUTION EQUIPMENT

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Technical point of contact: Mr. Trude, SEA 06K32T	703 602-8262	3328262
c. ADDRESS (Include Zip Code) Commander Naval Sea Systems Command Attn: 05Q42 2531 National CIR Washington, D.C. 20362-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T00:45Z
Check the source to verify that this is the current version before use.