METRIC

A-A-59636B
9 March 2011
SUPERSEDING
A-A-59636A
26 March 2008

COMMERCIAL ITEM DESCRIPTION

BEARING, BALL, ANNULAR, DOUBLE ROW, ANGULAR CONTACT, NON-FILLING SLOT, VERTEX OF CONTACT ANGLES OUTSIDE BEARING, DIMENSION SERIES 32

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers metric, double row, angular contact, annular ball bearings for general-purpose use. These bearings are not intended for use in critical aeronautical or critical special precision applications.

2. CLASSIFICATION. The ball bearings shall be classified by the class, sizes, cage materials, shield and seal configurations, precision tolerances, and lubricant and preservative requirements listed below:

Class 8 - dimension series 32

Size - bearing dimensions (see table I)

Cage materials (see table II)

Shield and seal configurations (see table III)

Precision tolerances (see table IV)

Lubricant and preservative requirements (see table V)

3. SALIENT CHARACTERISTICS

3.1 Dimensions. Bearing boundary dimensions shall conform to the requirements specified in table I for each of the coded bearing sizes. The listed dimensions conform to the requirements specified for the listed bearing sizes from dimension series 32 in American Bearing Manufacturers Association (ABMA) Standard 20, "Radial Bearings of Ball, Cylindrical Roller,

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

and Spherical Roller Types, Metric Design". The bearing size shall be as specified in the acquisition order (see 7.3(b)). For unlisted bearing sizes, the dimensional and dynamic load rating requirements should also be specified in the acquisition order.

TABLE I. Dimensional requirements (ABMA series 32).

Bearing size code	Bore diameter (mm)	Outside diameter (mm)	Width (mm)	Chamfer r/min. (mm)	Minimum shaft shoulder diameter [1] (mm)	Dynamic load rating (minimum) (lb.)
00	10	30	14.3	0.6	15	1,320
01	12	32	15.9	0.6	17	1,730
02	15	35	15.9	0.6	20	1,970
03	17	40	17.5	0.6	22	2,170
04	20	47	20.6	1.0	26	3,140
05	25	52	20.6	1.0	31	3,400
06	30	62	23.8	1.0	36	4,720
07	35	72	27.0	1.1	42	6,230
08	40	80	30.2	1.1	47	7,480
09	45	85	30.2	1.1	52	7,985
10	50	90	30.2	1.1	57	7,925
11	55	100	33.3	1.5	63.5	9,350
12	60	110	36.5	1.5	68.5	11,445
13	65	120	38.1	1.5	73.5	13,325
14	70	125	39.7	1.5	78.5	14,540
15	75	130	41.3	1.5	84	15,805
16	80	140	44.4	2.0	90	17,380
17	85	150	49.2	2.0	95	20,105
18	90	160	52.4	2.0	100	21,460
19	95	170	55.6	2.1	107	26,080
20	100	180	60.3	2.1	112	29,320

[1] Listed for reference purposes only. Shoulder height shall be determined to provide sufficient clearance for the direct application of bearing removal force against the bearing inner ring. If the required minimum clearance is not available, an alternative non-destructive bearing removal capability shall be provided.

3.2 Materials.

3.2.1 Rings. The bearing ring material shall be chromium-alloy steel 52100 (UNS G52986) as specified in ASTM International (ASTM) A295/A295M, "Standard Specification for Anti-Friction Roller Bearing Steel". The finished rings shall not exceed the associated billet material inclusion rating that is also specified in ASTM A295/A295M. Ring hardness shall be at least 58

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

HRC as defined in ASTM E18, "Standard Test Methods for Rockwell Hardness of Metallic Materials". The grain size of the ring material shall be determined in accordance with ASTM E112, "Standard Methods for Determining Average Grain Size".

3.2.2 Balls. The bearing ball material shall be chromium-alloy steel 52100 (UNS G52986) as specified in ASTM A295/A295M. The finished balls shall not exceed the associated billet material inclusion rating, which is also specified in ASTM A295/A295M. Balls shall be through-hardened no less than 60 HRC and no more than 67 HRC as defined in ASTM E18. The grain size of the ball material shall be determined in accordance with ASTM E112.

3.2.3 Cage. The bearing cage material shall be impervious to deterioration from any lubricant, preservative, solvent, or other chemical substance expected to contact the bearing during normal use or storage. Similarly, the material shall not cause any chemical deterioration of any other bearing component. Metallic cage materials shall operate from -40 to 250 ºF (-40 to 121 ºC). Non-metallic cage materials shall operate from -20 to 250 ºF (-30 to 121 ºC). Unless otherwise specified in the acquisition order, the cage material shall be one of the optional coded types listed in table II (see 7.3(c)).

TABLE II. Cage materials.

Code [1]	Material type
J	Pressed steel
M	Machined bronze or brass
P	Molded plastic (nylon 6/6 or equal)
T	Machined non-metallic (phenolic)
Y	Pressed brass
X	Other (specify in acquisition order)

[1] No significant change from FF-B-171/32.

3.2.4 Shields and seals. When used, the shield and seal material shall be as recommended by the manufacturer, unless otherwise specified in the acquisition order (see 7.3(d)). The material shall be impervious to deterioration from any lubricant, preservative, solvent, or other chemical substance expected to contact the bearing during normal use or storage. Similarly, the material shall not cause any chemical deterioration of any other bearing component. The shield or seal shall remain functionally effective at a minimum temperature range of -20 to 250 °F (-30 to 121 °C) for non-metallic and -40 to 250 °F (-40 to 121 °C) for metallic materials. Unless otherwise specified in the acquisition order, the shield, seal, and snap ring configuration for the bearing shall be one of the coded options listed in table III (see 7.3(e)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

TABLE III. Shield and seal configurations.

Code [1]	Configuration option
A	Open
B	Single shield
C	Double shield
D	Single seal
E	Double seal
F	Single shield and seal
G	Open with snap ring
H	Single shield on snap ring side
J	Single shield opposite snap ring
K	Double shield with snap ring
L	Single seal on snap ring side
M	Single seal opposite snap ring
N	Double seal with snap ring
P	Single shield and seal (shield on snap ring side)
X	Other (specify in acquisition order)

[1] No significant change from FF-B-171/32.

3.2.5 Snap rings. When used, the bearing snap ring and associated snap ring groove shall conform to the requirements specified in ABMA Standard 20.

3.3 Precision tolerance. The bearing precision tolerance level shall conform to Annular Bearing Engineers Committee (ABEC) class ABEC-1, ABEC-3, ABEC-5, or ABEC-7 as defined in ABMA Standard 20. The tolerance class and associated radial internal clearance shall be one of the coded options listed in table IV (see 7.3(f)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

TABLE IV. Precision tolerance requirements.

Code	Tolerance class	Radial internal clearance
A	ABEC-1	Group 2 (less than normal)
B		Group N (normal)
C		Group 3 (greater than normal)
D		Group 4 (greater than group 3)
T		Group 5 (greater than group 4)
E	ABEC-3	Group 2 (less than normal)
F		Group N (normal)
G		Group 3 (greater than normal)
H		Group 4 (greater than group 3)
U		Group 5 (greater than group 4)
J	ABEC-5	Group 2 (less than normal)
K		Group N (normal)
L		Group 3 (greater than normal)
M		Group 4 (greater than group 3)
V		Group 5 (greater than group 4)
N	ABEC-7	Group 2 (less than normal)
P		Group N (normal)
R		Group 3 (greater than normal)
S		Group 4 (greater than group 3)
W		Group 5 (greater than group 4)

3.3.1 Bearing precision tolerance levels and internal clearances may be affected by the addition of shields and/or seals. Manufacturers/suppliers should be consulted for availability of desired precision tolerances when shields and/or seals are required.

3.4 Dynamic load rating. The listed ratings in table I conform to the requirements specified in ABMA Standard 9, "Load Ratings and Fatigue Life for Ball Bearings".

3.5 Lubrication and preservation requirements. Unless otherwise specified in the acquisition order, the bearing lubricant or preservative requirement shall be as selected from the approved coded options listed in table V (see 7.3(g)). When grease fill is required, the bearing void (the airspace between the inner and outer rings of the assembled bearing) shall be 25 to 50 percent filled. Bearing preservative shall be in accordance with MIL-DTL-197, "Packaging of Bearings, Associated Parts and Subassemblies".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

TABLE V. Lubricant and preservative requirements.

Code	Lubricant or preservative compound
B	Grease in accordance with MIL-PRF-81322
E	Grease in accordance with DOD-G-24508
H	Grease in accordance with MIL-PRF-23827
L	Grease with SRI-2 or qualified equivalent
S	No fill
T	Preservation compound in accordance with MIL-DTL-197
X	Other (specify in the acquisition order)

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Foreign acquisition restrictions. Unless otherwise indicated in the solicitation and resulting contract, the foreign acquisition restrictions in Section 252.225, Clause 252.225.7016 of the Defense Federal Acquisition Regulation Supplement (DFARS) apply to products described by this CID.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The products offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Unless otherwise specified in the acquisition order, the bearings supplied shall be preserved, packed, and marked in accordance with MIL-DTL-197 (see 7.3(h)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

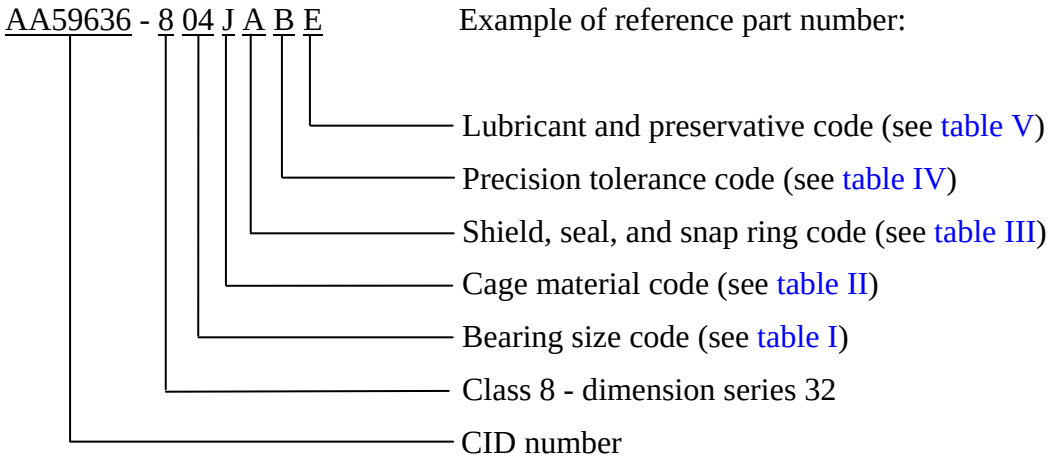

AA59636 - 8 04 J A B E indicates: boundary dimension series 32; bore diameter 20 mm, outside diameter 47 mm, width 20.6 mm; pressed steel cage; open (no shields or seals); ABEC-1 tolerance class, normal radial internal clearance; filled with grease in accordance with DOD-G-24508.

7.2 Sources of documents.

7.2.1 DFARS and FAR. Copies of DFARS and FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of DFARS may be obtained from http://www.acq.osd.mil/dpap/dars/dfarspgi/current/index.html. Electronic copies of FAR may be obtained from https://www.acquisition.gov/far/.

7.2.2 Military specifications. Copies of military specifications may be obtained from Standardization Documents Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094. Electronic copies may be obtained from https://assist.daps.dla.mil/.

7.2.3 ABMA standards. Copies of ABMA standards may be obtained from the American Bearing Manufacturers Association, 2025 M Street NW, Suite 800, Washington, DC 20036. Electronic copies may be obtained from http://www.abma-dc.org/.

7.2.4 ASTM standards. Copies of ASTM standards may be obtained from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959. Electronic copies may be obtained from http://www.astm.org/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. The acquisition order should specify the following information:

a. CID document number, revision, and CID PIN.
b. Bearing size (with dimension/load requirements if size is unlisted) (see 3.1).
c. Cage material type (see 3.2.3).
d. Shield and seal material (see 3.2.4).
e. Shield, seal, and snap ring configuration (see 3.2.4).
f. Precision tolerance requirements (see 3.3).
g. Lubricant and preservative requirement (see 3.5).
h. Preservation, packing, and marking requirements (see 6.1).

7.4 Codes cross-reference. Tables VI, VII, and VIII contain cross-reference data for the PIN information as listed in FF-B-171/32 and this CID.

7.4.1 Bearing class designations. The CIDs replacing 33 of the 37 associated specification sheets of FF-B-171 have been assigned class codes corresponding to ABMA dimension series. Table VI lists the FF-B-171 specification sheets, the corresponding dimension series, the CID class codes, and the replacement CIDs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Federal specification to CID cross-reference.

FF-B-171 specification sheets	ABMA dimension series	CID class codes	Replacement CID numbers
1	02, 03, 10	1, 2, 4	A-A-59581
2	19	5	A-A-59582
3	10	4	A-A-59583
4	02	1	A-A-59584
5	03	2	A-A-59585
6	04	3	A-A-59586
7	02	1	A-A-59587
8	03	2	A-A-59589
9	32	8	A-A-59595
10	33	9	A-A-59596
11	02	1	A-A-59597
12	03	2	A-A-59598
13	22	6	A-A-59599
14	23	7	A-A-59600
15	19	-	Canceled
16	10	-	Canceled
17	02	-	Canceled
18	03	-	Canceled
19	19	5	A-A-59623
20	10	4	A-A-59624
21	02	1	A-A-59625
22	03	2	A-A-59626
23	04	3	A-A-59627
24	10	4	A-A-59628
25	02	1	A-A-59629
26	03	2	A-A-59630
27	04	3	A-A-59631
28	10	4	A-A-59632
29	02	1	A-A-59633
30	03	2	A-A-59634
31	04	3	A-A-59635
32	32	8	A-A-59636
33	33	9	A-A-59637
34	32	8	A-A-59638
35	33	9	A-A-59639
36	32	8	A-A-59640
37	33	9	A-A-59641

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

TABLE VII. Radial internal clearance and ABEC tolerance codes.

FF-B-171/32 codes			A-A-59636B codes		
Code	Radial internal clearance	Tolerance class	Code	Tolerance class	Radial internal clearance
1	Symbol 2	ABEC-1	A	ABEC-1	Group 2
2	Symbol 0		B		Group N
3	Symbol 3		C		Group 3
4	Symbol 4		D		Group 4
			T		Group 5
			E	ABEC-3	Group 2
			F		Group N
			G		Group 3
			H		Group 4
			U		Group 5
5	Symbol 2	ABEC-5	J	ABEC-5	Group 2
6	Symbol 0		K		Group N
7	Symbol 3		L		Group 3
8	Symbol 4		M		Group 4
			V		Group 5
			N	ABEC-7	Group 2
			P		Group N
			R		Group 3
			S		Group 4
			W		Group 5

TABLE VIII. Lubricant and preservative requirements codes.

FF-B-171/32 codes		A-A-59636B codes	
Code	Lubricant or preservative	Code	Lubricant or preservative
A	Grease IAW MIL-PRF-81322	B	Grease IAW MIL-PRF-81322
B	Grease IAW DOD-G-24508	E	Grease IAW DOD-G-24508
C	Grease IAW MIL-PRF-23827	H	Grease IAW MIL-PRF-23827
D	Grease with SRI-2 or equivalent	L	Grease with SRI-2 or qualified equivalent
E	Preservation compound IAW MIL-DTL-197	T	Preservation compound IAW MIL-DTL-197
		S	No fill
		X	Other (specify in the acquisition order)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.

7.5 Subject term (key word) listing.

ABEC
cage
dynamic load rating
lubricant
precision tolerance
rings

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - OS
Air Force - 99
DLA - GS

Review Activities:
Army - GL
Navy - SH
Air Force - 11, 84

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing Activity:
DLA - GS4

(Project 3110-2011-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:22Z
Check the source to verify that this is the current version before use.