
MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED NICKEL CADMIUM BB-588/U

This specification sheet is approved for use by the Electronic Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the sealed nickel cadmium rechargeable battery type described herein shall consist of this document and the latest issue of Specification MIL-B-49436(ER).

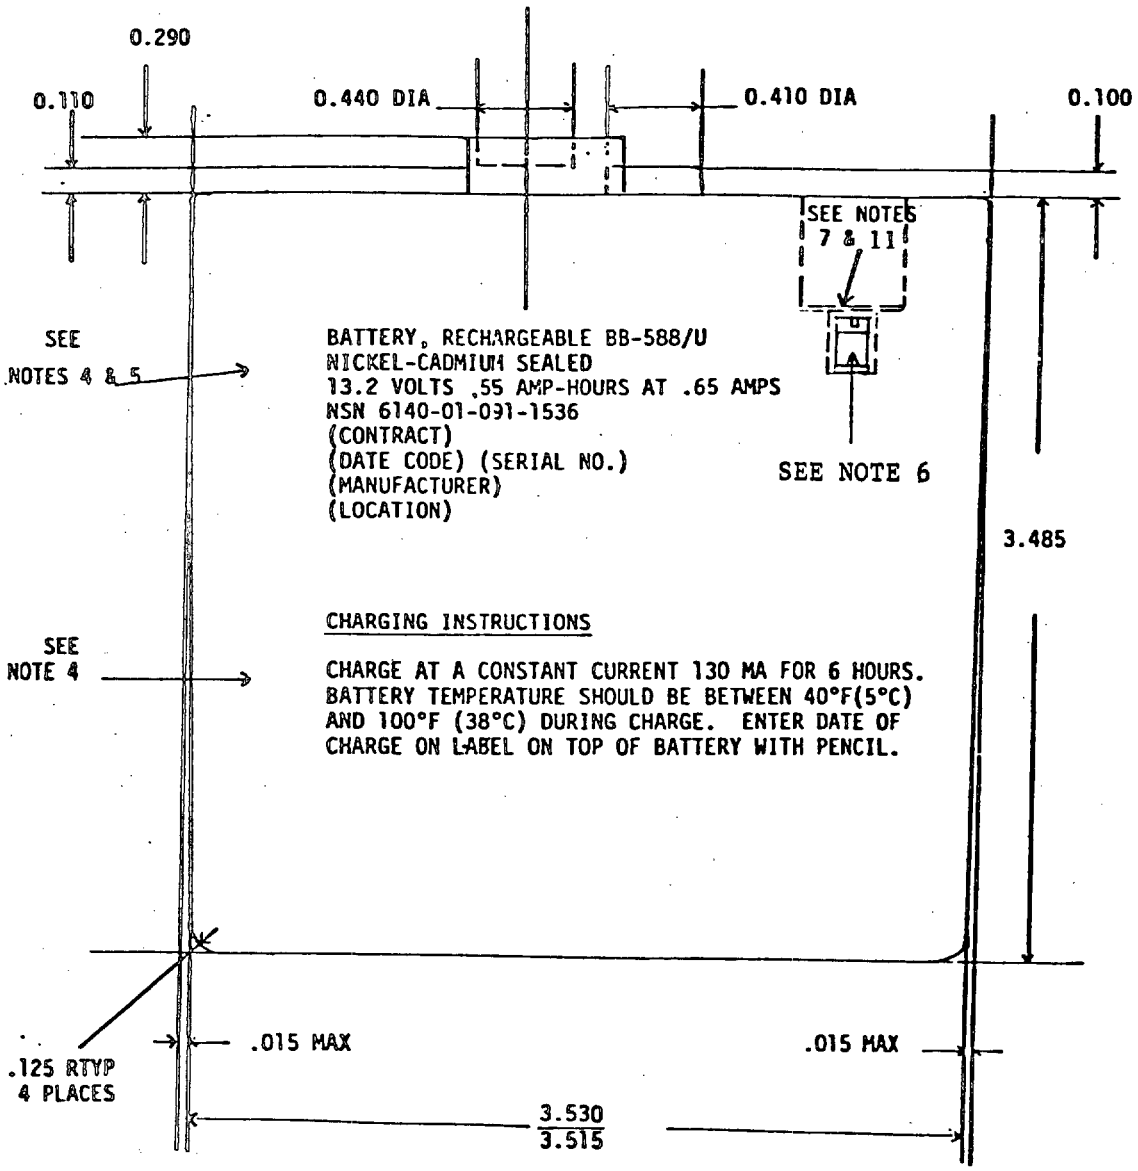


INCHES	MM
.015	.38
.100	2.54
.110	2.79
.125	3.18
.290	7.37
.410	10.41
.440	11.18
3.485	88.52
3.515	89.28
3.530	89.66

FIGURE 1. FRONT VIEW

FSC-6140

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

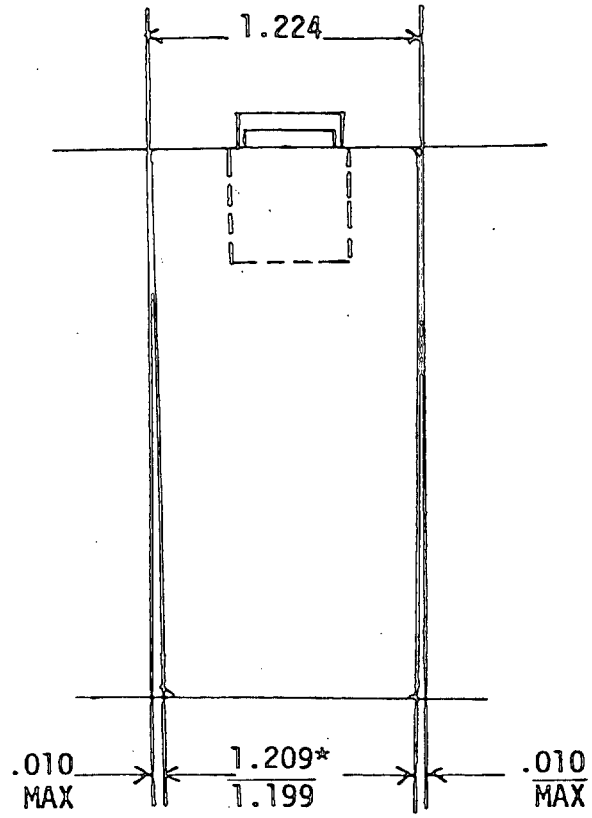

INCHES	MM
.002	.05
.003	.08
.010	.25
.281	7.14
.320	8.13
.500	12.70
.562	14.13
.605	15.37
1.119	30.45
1.209	30.71
1.224	31.09
1.485	37.72
1.765	44.83
3.545	90.04

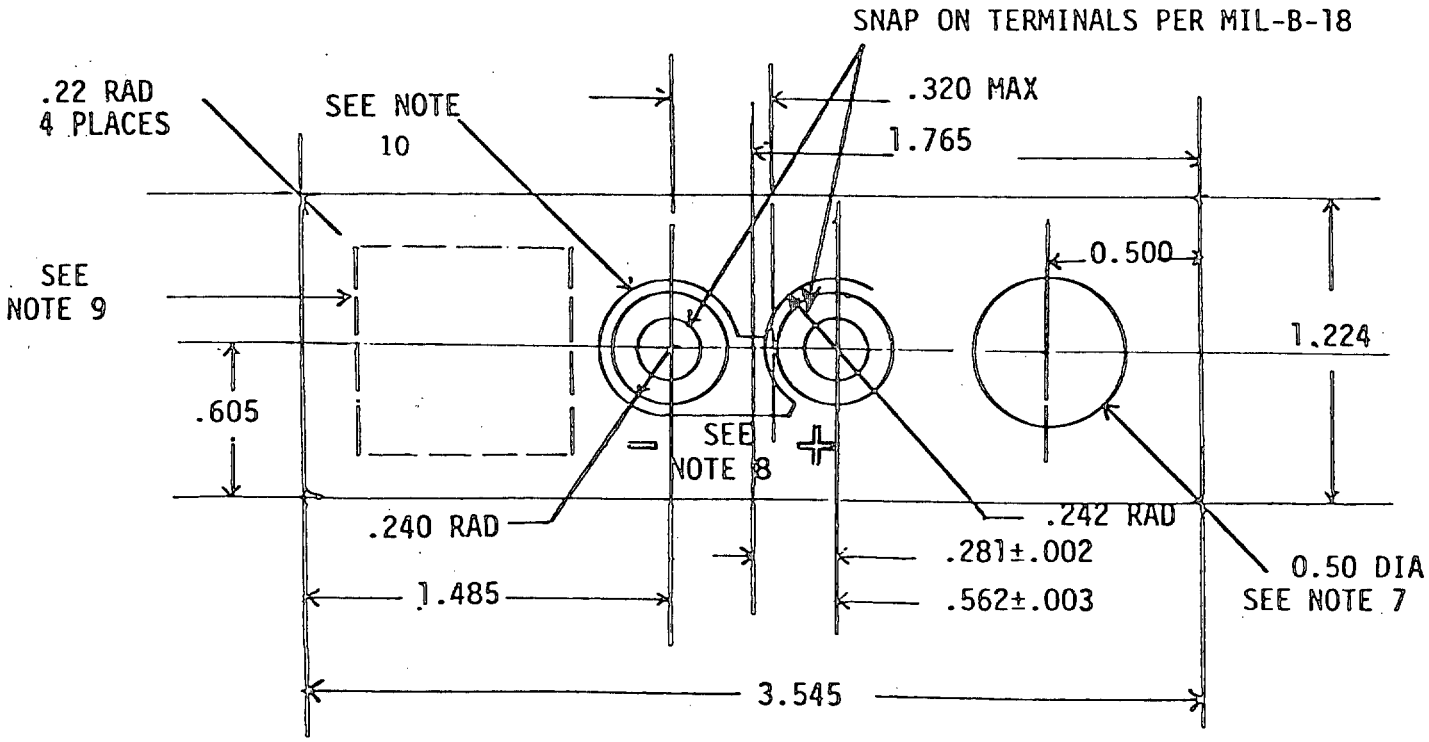


FIGURE 2. TOP AND SIDE VIEW OF BB-588/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

DRAWING NOTES

1. All dimensions in inches.
2. Tolerances on decimals: 0.015 inch, unless otherwise specified.
3. Dimensioning shall be per USAS-114.5 Y14.5 1966.
4. Stencil (or equivalent) identification and charging instructions as shown. Color marking white.
5. Manufacturer must fill in applicable information in parenthesis.
6. Pressure relief mechanism shall be located as shown on drawing. It shall release gas before case damage is incurred.
7. Cable assembly mating hole - depth to be 0.360 $\pm$ .030 inches.
8. Terminal marking shall be embossed or impressed. Positive terminal marking shall be colored red.
9. Last date of charge label shall be as shown on Figure 2.
10. Plastic shield around negative terminal to prevent connection of two (2) batteries together.
11. A vent valve cover which will allow the escape of gas (using the same type and color material as the case) shall be affixed in place when using a screw type vent valve. Vent valve shall not be removeable by user.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Rated capacity (C_5):	.65 AH
Voltage (Nominal):	13.2 Volts
Weight (Maximum):	.40 Kg (.88 lb)
Connector:	Snap type per MIL-B-18
Number and type of cells:	11 sealed "1/2 C_S" size cells or equal in series
Charge rate for testing and on battery (C/5 for 6 hrs):	.13 amps

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current (Amps)
C/5	-	12.0	.13
C_5	-	12.0	.65
3 C_5	12.1	12.0	1.95

Test	Discharge Rate	Capacity Requirement(AH)
Full Capacity Discharge	C_5	.55
Cycle Life, 224 cycles	C_5	.41
Overcharge, 24 hours	C_5	.55
High Rate Discharge	3 C_5	.40
Low Temperature Discharge at -17°C (0°F)	C_5	.40
Retention of Charge 7 days at 51°C(124°F)	C_5	.27
Pulse Discharge	Not applicable	-
Vibration	C/5	.65

NOTES - 1. Unless otherwise specified, all values are minimum.
2. All charges and discharges shall be performed on fully assembled batteries through the terminals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Mounting screws for connector - Not applicable.

Connector. Battery connector shall be snap type terminal per MIL-B-18 which shall be capable of withstanding a minimum of 500 coupling and uncoupling with charging cable with no breakage, distortion or loss of electrical performance.

Connector shield. A plastic shield shall be put around the negative terminal to prevent 2 BB-588/U batteries from being joined together at the snap type terminal.

Electrical leakage. Not applicable.

High rate pulse. Not applicable.

CUSTODIAN:
ARMY-ER
REVIEWER:
ARMY - CR, AV, GL

PREPARING ACTIVITY:
ARMY-ER
(PROJECT 6140-A577-2)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/4140

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.