INCH-POUND


MIL-DTL-55302/140C
7 March 2005
SUPERSEDING
MIL-C-55302/140B
17 November 1988


DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG WITH PIN CONTACTS, 2 KEYING PINS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

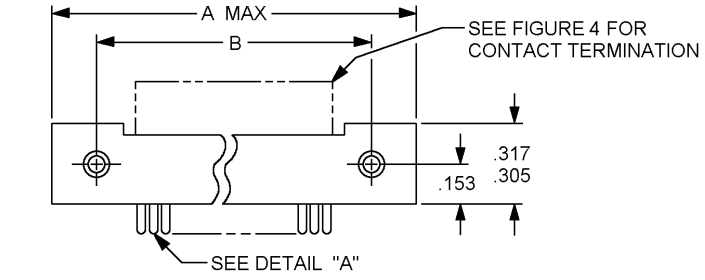

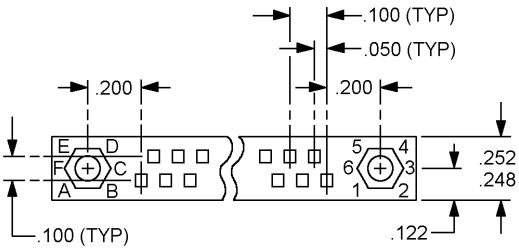

Inches	mm	Inches	mm
.004	0.10	.142	3.61
.008	0.20	.153	3.89
.012	0.30	.189	4.80
.020	0.51	.200	5.08
.0229	0.582	.248	6.30
.0244	0.620	.252	6.40
.050	1.27	.305	7.45
.100	2.54	.317	8.05
.122	3.10		

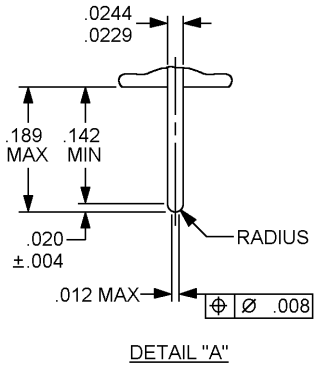

DETAIL "A"

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).

FIGURE 1. Connector, plug (.100 inch spacing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Arrangements and characteristics.

Contact arrangement	Number of contacts	Dimensions (inches)	
		A max	B ± .006 (0.15)
M55302/140A	17	1.516 (38.50)	1.200 (30.48)
M55302/140B	29	2.114 (53.70)	1.800 (45.72)
M55302/140C	33	2.314 (58.80)	2.000 (50.80)
M55302/140D	41	2.716 (69.00)	2.400 (60.96)
M55302/140E	53	3.315 (84.20)	3.000 (76.20)
M55302/140F	65	3.917 (99.50)	3.600 (91.44)


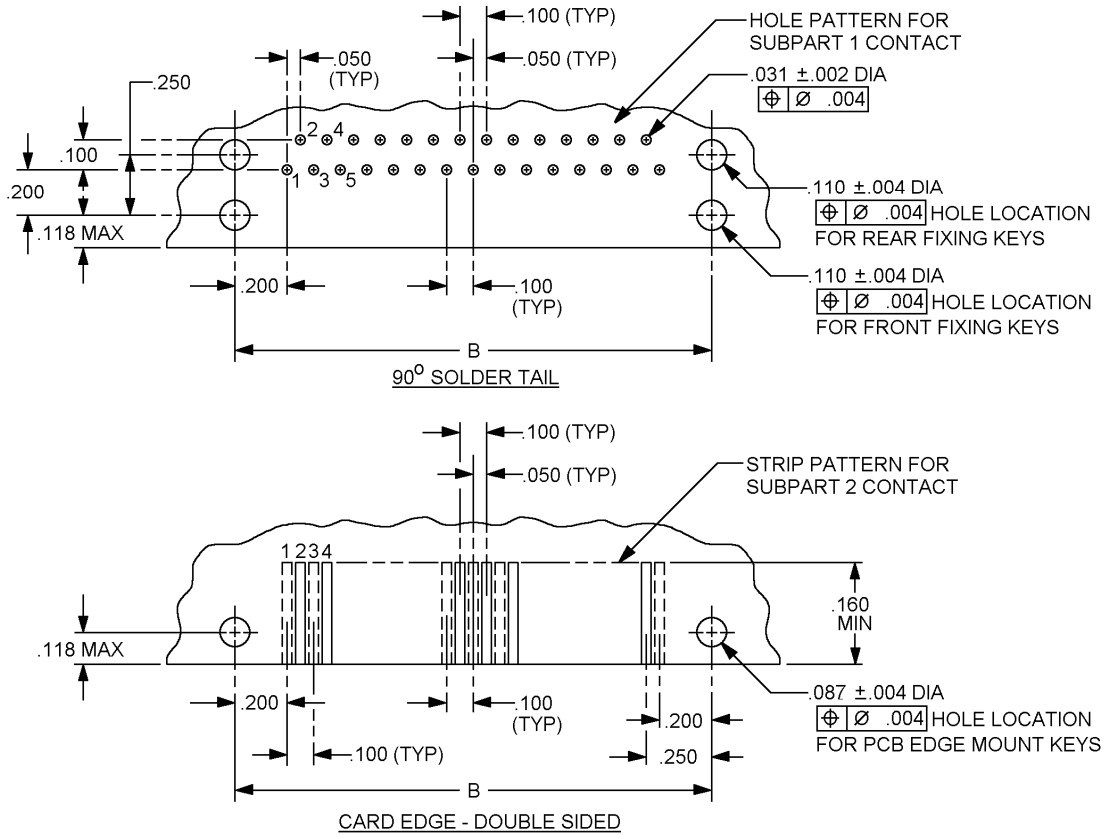


FIGURE 2. Recommended hole pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

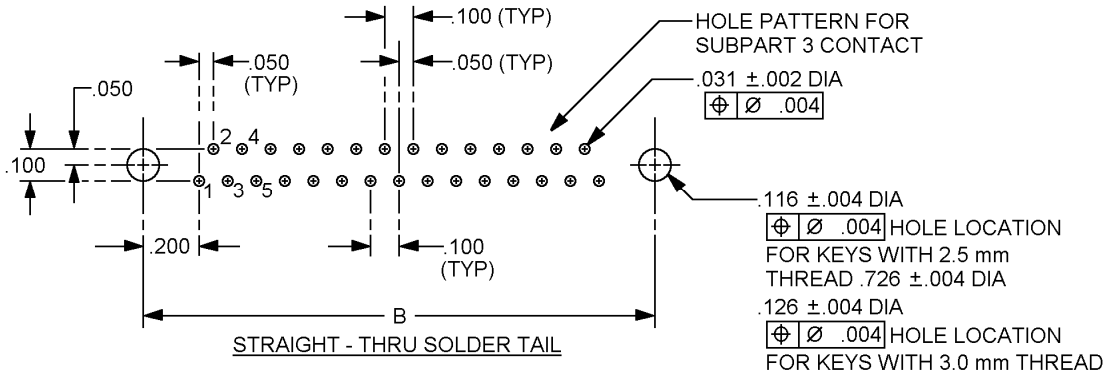


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.099	2.51	.126	3.20
.004	0.10	.100	2.54	.160	4.06
.031	0.79	.110	2.79	.200	5.08
.050	1.27	.116	2.95	.250	6.35
.087	2.21	.118	3.00	.726	18.44


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).
4. Metric equivalents are in parentheses.

FIGURE 2. Recommended hole patterns – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.




PART NUMBER
M55302/140A




PART NUMBER
M55302/140B




PART NUMBER
M55302/140C



PART NUMBER
M55302/140D



PART NUMBER
M55302/140E



PART NUMBER
M55302/140F

FIGURE 3. Contact arrangements and keying arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

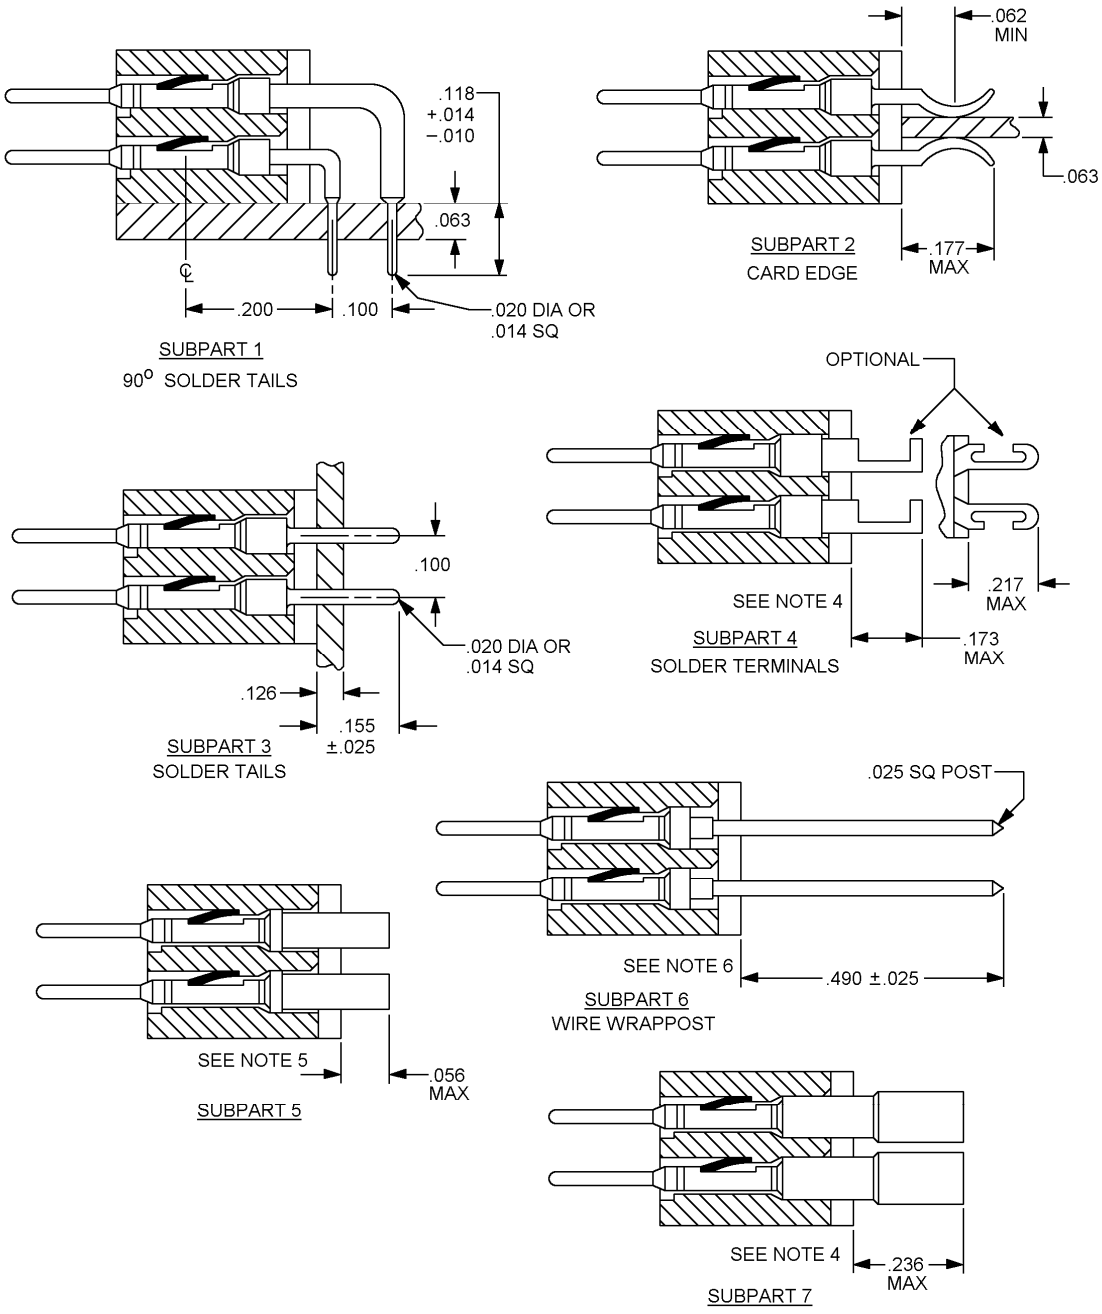


FIGURE 4. Connector terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.063	1.60	.177	4.50
.014	0.36	.100	2.54	.200	5.08
.020	0.51	.118	3.00	.217	5.51
.025	0.64	.126	3.20	.236	5.99
.056	1.42	.155	3.94	.490	12.45
.062	1.57	.173	4.39		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).
4. Contact accepts no. 22 AWG wire.
5. Contact, crimp type, accepts no 22-26 AWG wires.
6. Contact with .025 inch^2 (0.64 mm^2) wrappost.

FIGURE 4. Connector terminations - Continued.

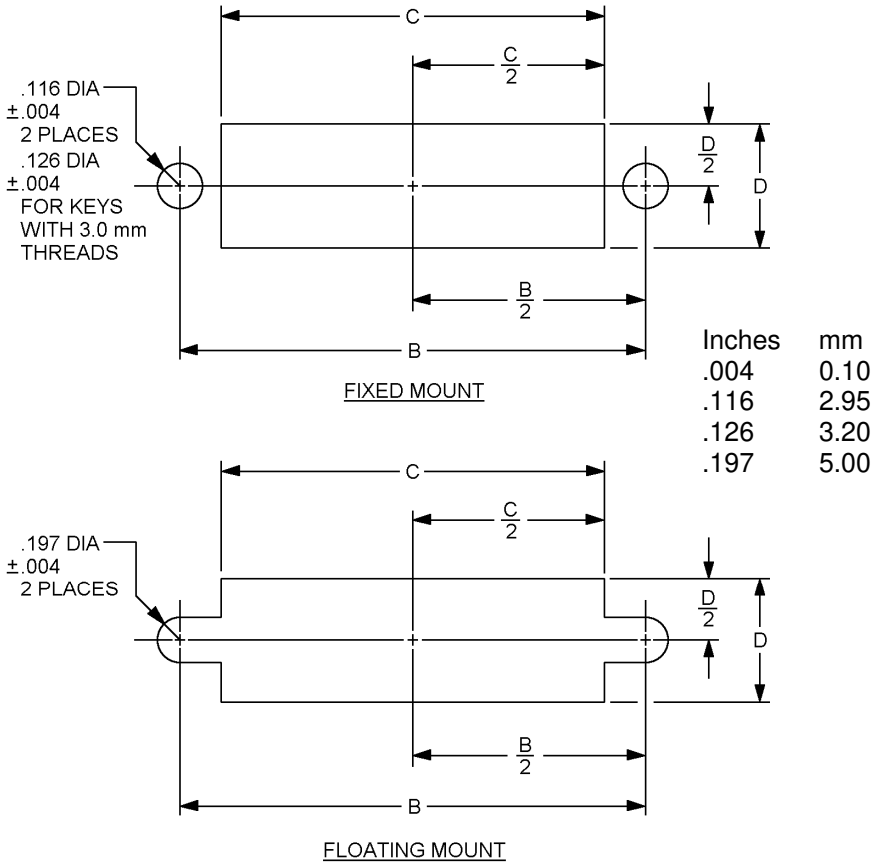


FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Number of Contacts	17	29	33	41	53	65
B ± .008 (± 0.20)	1.200 (30.48)	1.800 (45.72)	2.000 (50.80)	2.400 (60.96)	3.000 (76.20)	3.600 (91.44)
C Min.	1.020 (25.91)	1.618 (41.10)	1.819 (46.20)	2.221 (56.41)	2.819 (71.60)	3.422 (86.92)
D Min.	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)	.374 (9.45)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).
4. Metric equivalents are in parentheses.
5. Floating mount panel thickness .085 (2.16 mm) maximum.

FIGURE 5. Recommended panel cutouts - Continued.

REQUIREMENTS:

Dimensions and configurations: See figures 1 through 5.

Contact identification: See figure 3.

Contact retention: 4 pounds minimum for each contact.

Contact engagement: 0.7 ounce minimum, 3.6 ounces maximum.

Contact separation: 0.7 ounce minimum, 3.6 ounces maximum.

Contact resistance: The contact resistance shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 Vrms, 60 Hz.

High altitude: 300 Vrms, 60 Hz.

Current rating, maximum: 3.0 amperes at 25°C.

Keying pin: Two hexagonal keyed guides provide 36 polarizing positions. Keys are constructed in accordance with M55302/154. Connectors are supplied with hex pins in the “1” and “A” positions, except for 1/4-turn locking styles, which are keyed in “F” and “6” positions. When required, connectors can be easily keyed to the desired position by using a standard wrench or screwdriver.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

Crimping tools:

Basic tool: M22520/2-01.
Positioner: M22520/2-36.

Hood types: See MIL-DTL-55302/155.

Mounting hardware: See MIL-DTL-55302/154, figure 2, plug.

Mating connectors: Shall be in accordance with MIL-DTL-55302/142.

Part or Identifying Number (PIN): Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

M55302/140 * * N 1 *

Specification sheet number
Plug with pin contacts

Contact arrangement
(see figure 3)

Contact type – 2.5 amperes
(see figure 4)

Contact type – Coaxial
N – not applicable

Indexing type
1 – Hexagon post (36 positions)

Mounting hardware
(see MIL-DTL-55302/154)

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/142
MIL-DTL-55302/154
MIL-DTL-55302/155

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Review activities:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4485-000)

Review activities:
Army – AR, AT, AV, CR4
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.