
MIL-C-55302/154A
18 December 1984
SUPERSEDING
MIL-C-55312/154
24 April 1981

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: MOUNTING HARDWARE FOR PRINTED WIRING BOARDS


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55312.

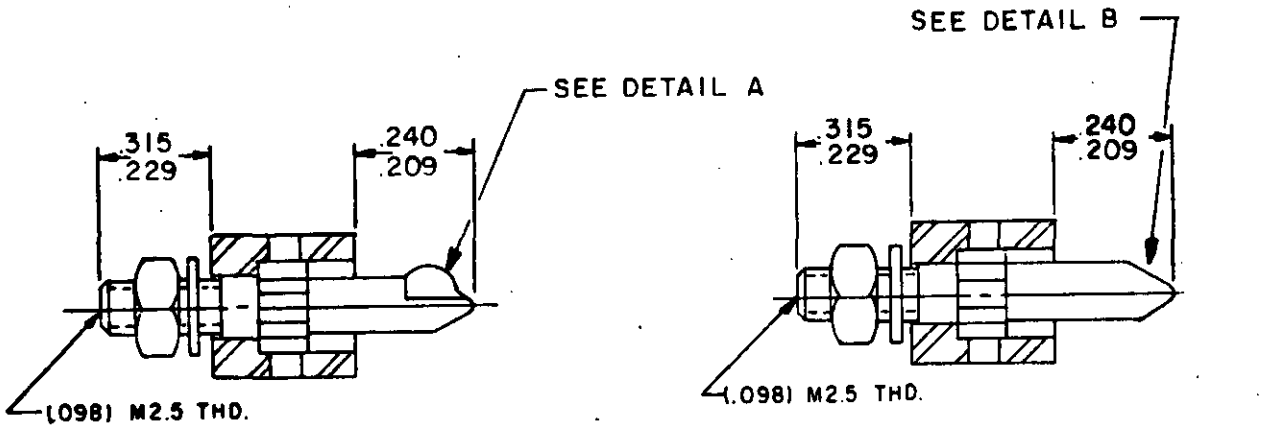

(1A & 2A) Plug - guide pin - polarized

(1B & 2B) Plug - guide pin - unpolarized

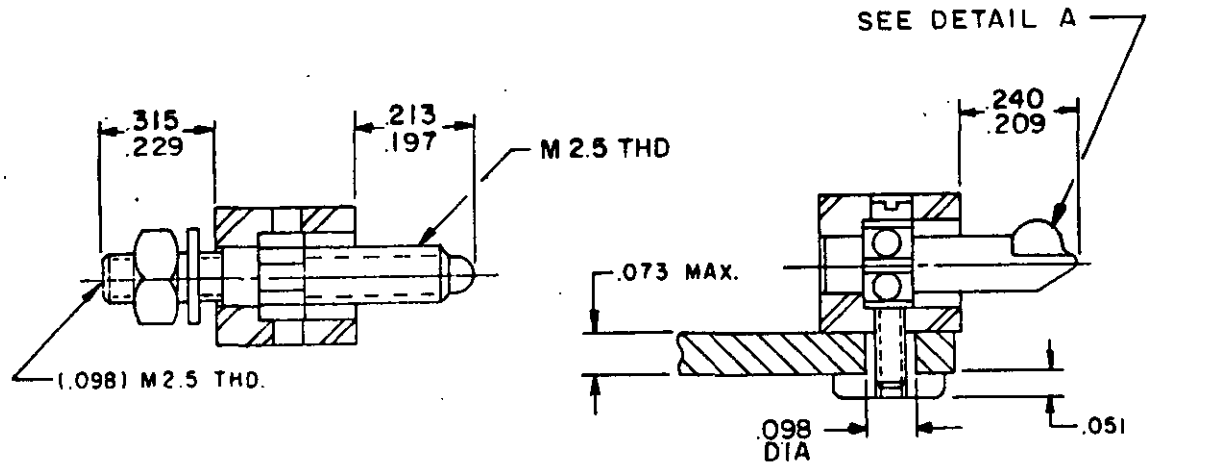


(1C & 2C) Plug - fixed jackscrew - unpolarized

(1D & 2D) Plug - guide pin - polarized right angle PCB mounting


FIGURE 1. Mounting hardware.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

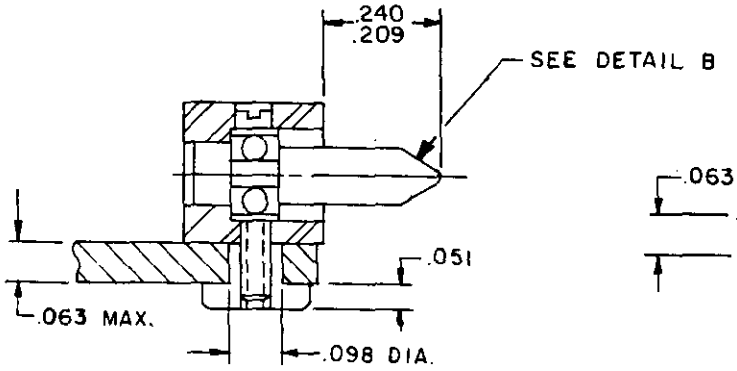


(1E & 2E) Plug - guide pin - unpolarized right angle PCB mounting

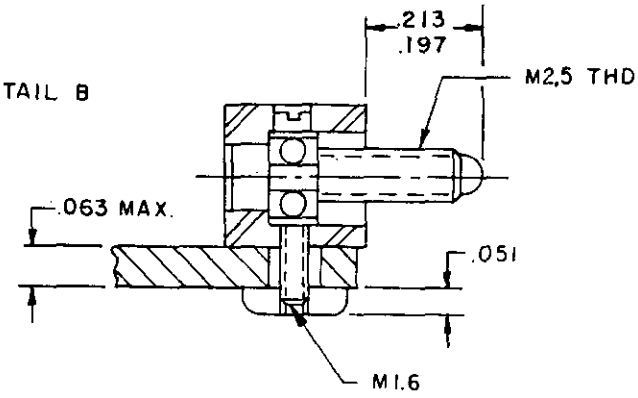


(1F & 2F) Plug - fixed jackscrew - unpolarized right angle PCB mounting

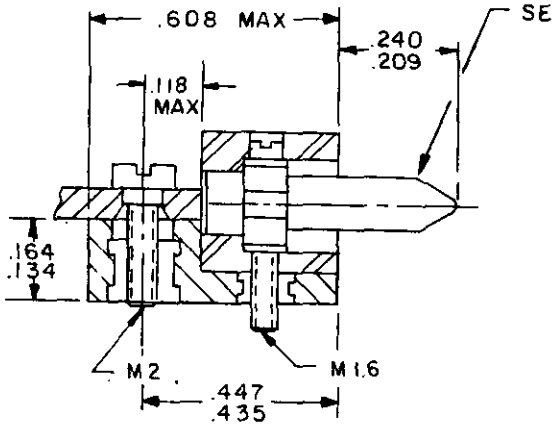


(1G & 2G) Plug - guide pin - unpolarized PCB edge mounting

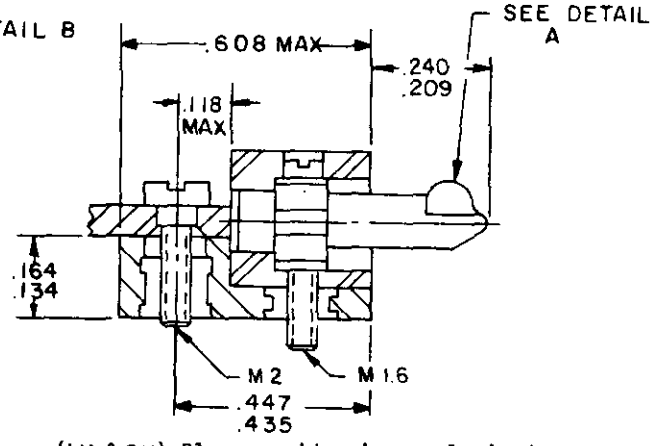

(1H & 2H) Plug - guide pin - polarized PCB edge mounting

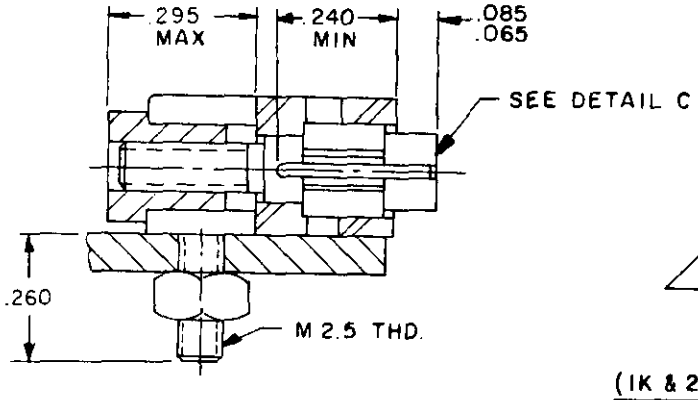


(1J & 2J) Receptacle - guide socket - polarized right angle PCB mounting

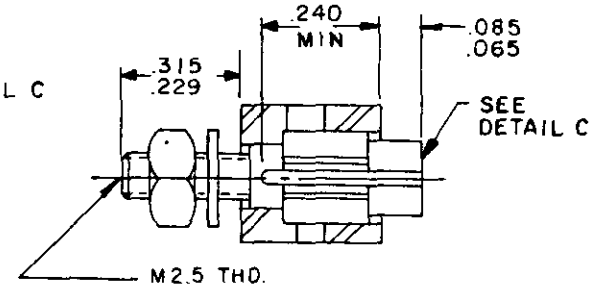


(1K & 2K) Receptacle - guide socket - polarized

FIGURE 1. Mounting hardware - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

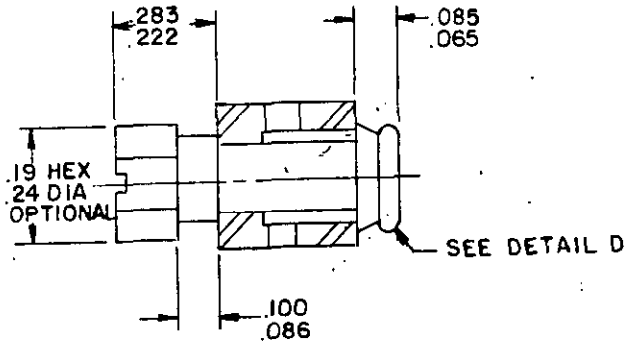


(1L & 2L) Receptacle - rotating jacksocket - unpolarized

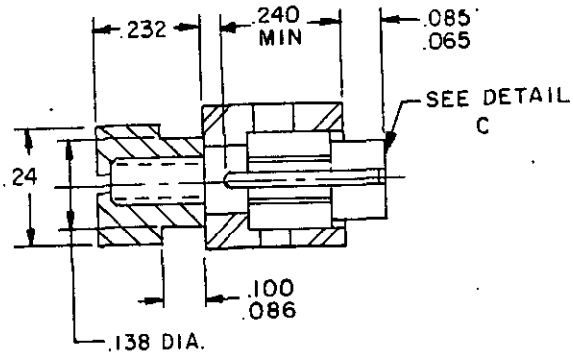


(1M & 2M) Receptacle - rotating jacksocket - floating polarized

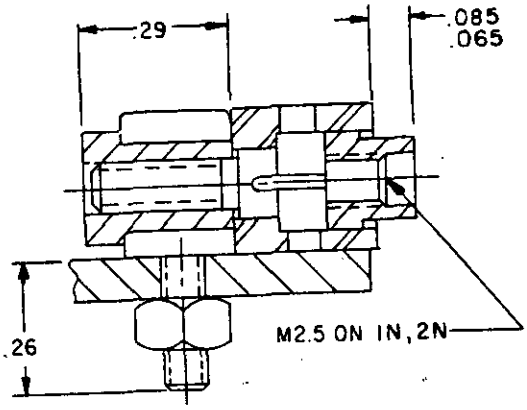


(1N & 2N) Receptacle - fixed jacksocket - polarized right angle PCB mounting

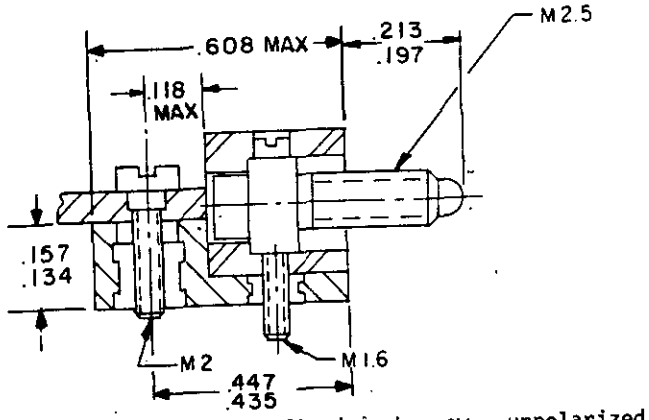

(1Q & 2Q) Plug - fixed jackscrew - unpolarized PCB edge mounting

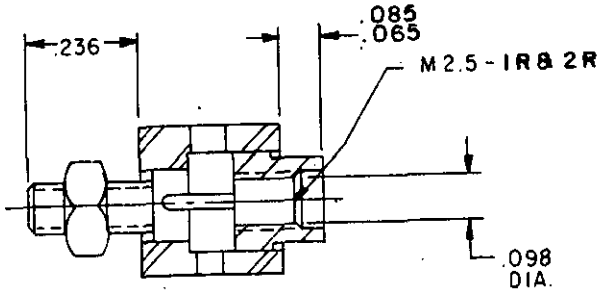


(1R & 2R) Receptacle - fixed jacksocket - polarized

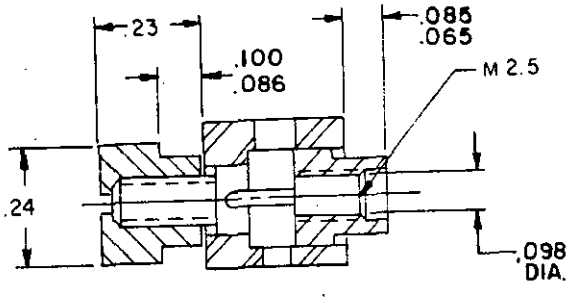

(1T & 2T) Receptacle - fixed jacksocket - floating polarized

FIGURE 1. Mounting hardware - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

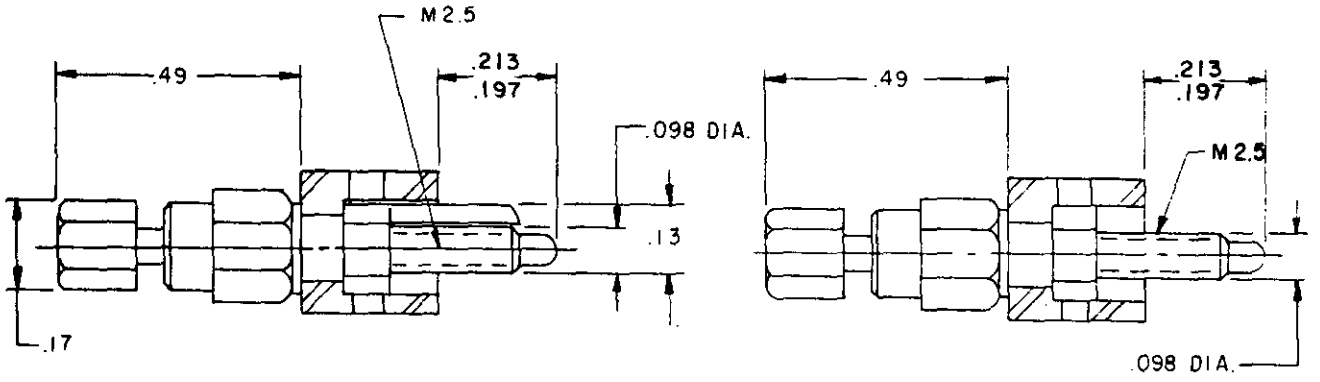

(1U & 2U) Plug - rotating jackscrew - polarized

INCHES	MM	INCHES	MM
.020	0.51	.096	2.44
.0276	0.701	.098	2.49
.032	0.81	.100	2.54
.0434	1.102	.110	2.79
.051	1.30	.112	2.84
.059	1.50	.118	3.00
.063	1.60	.126	3.20
.065	1.65	.13	3.3
.073	1.85	.134	3.40
.085	2.16	.138	3.51
.086	2.18	.146	3.71

(1V & 2V) Plug - rotating jackscrew - unpolarized

INCHES	MM	INCHES	MM
.153	3.89	.236	5.99
.157	3.99	.24	6.1
.164	4.17	.26	6.6
.17	4.3	.29	7.4
.19	4.8	.315	8.00
.197	5.00	.435	11.05
.209	5.31	.447	11.35
.213	5.41	.49	12.4
.229	5.82	.608	15.44
.23	5.8		
.232	5.89		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For lengths in hundredths, tolerance is ±.015 (.38 mm), for lengths in thousandths, tolerance is ±.010 (.25 mm).
4. Parts under subpart 1 have a hexagonal base with 6 polarizing positions. Parts under subpart 2 have a square base with 4 polarizing positions.
5. Only matching units of mounting hardware may be used in MIL-C-55302.

TABLE I. Intermateability of hardware.

X - mates

		Plug										
		A	B	C	D	E	F	G	H	Q	U	V
Receptacle	J	X	X		X	X		X	X			
	K	X	X		X	X		X	X			
	L			X			X					
	M	X	X		X	X		X	X	X		
	N										X	X
	R										X	X
	T										X	X

FIGURE 1. Mounting hardware - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

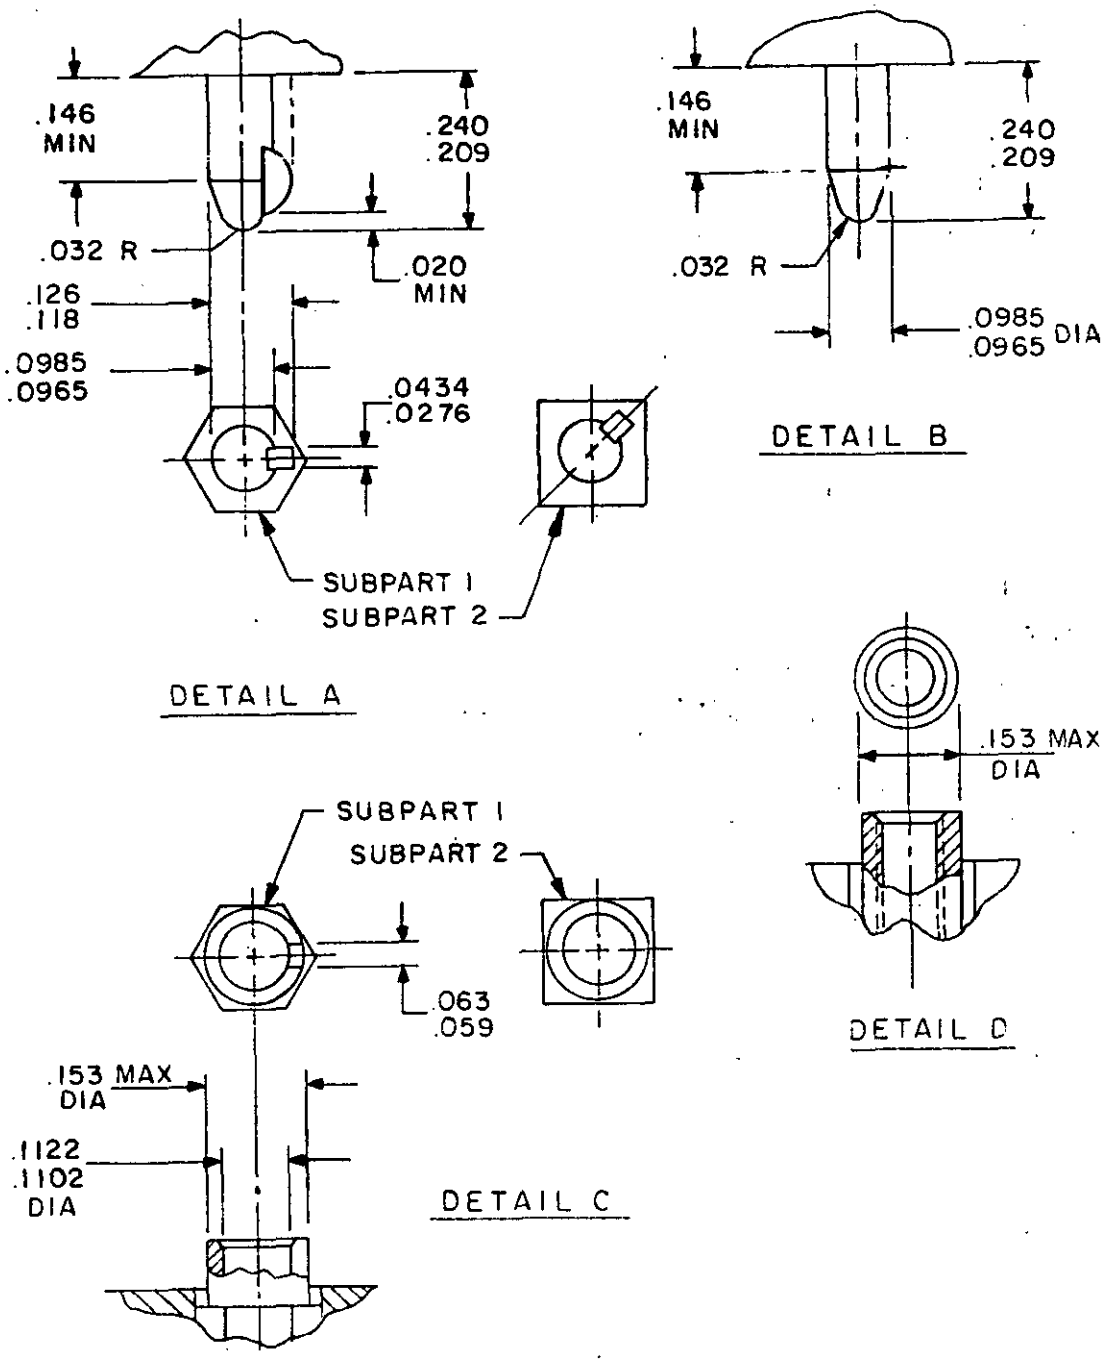


FIGURE 1. Mounting hardware - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Materials and finishes: Copper alloy per QQ-B-626, composition 22, plated per QQ-N-290, grade G.

Application: Each part number with subpart number 1 shall be interchangeable in MIL-C-55302/140 through /143. Each part number with subpart number 2 shall be interchangeable in MIL-C-55302/144 through /153.

Part number: M55302/154-1A

A - denotes different hardware styles.

1 - denotes application in type of connector.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - AR, AT, AV, ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3373-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.