
MILITARY SPECIFICATION SHEET

# CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, 160 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS, 2.54 MM X 1 27 MM OFFSET GRID, METRIC

This specification is approved for use within the US Army Communications - Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55302.

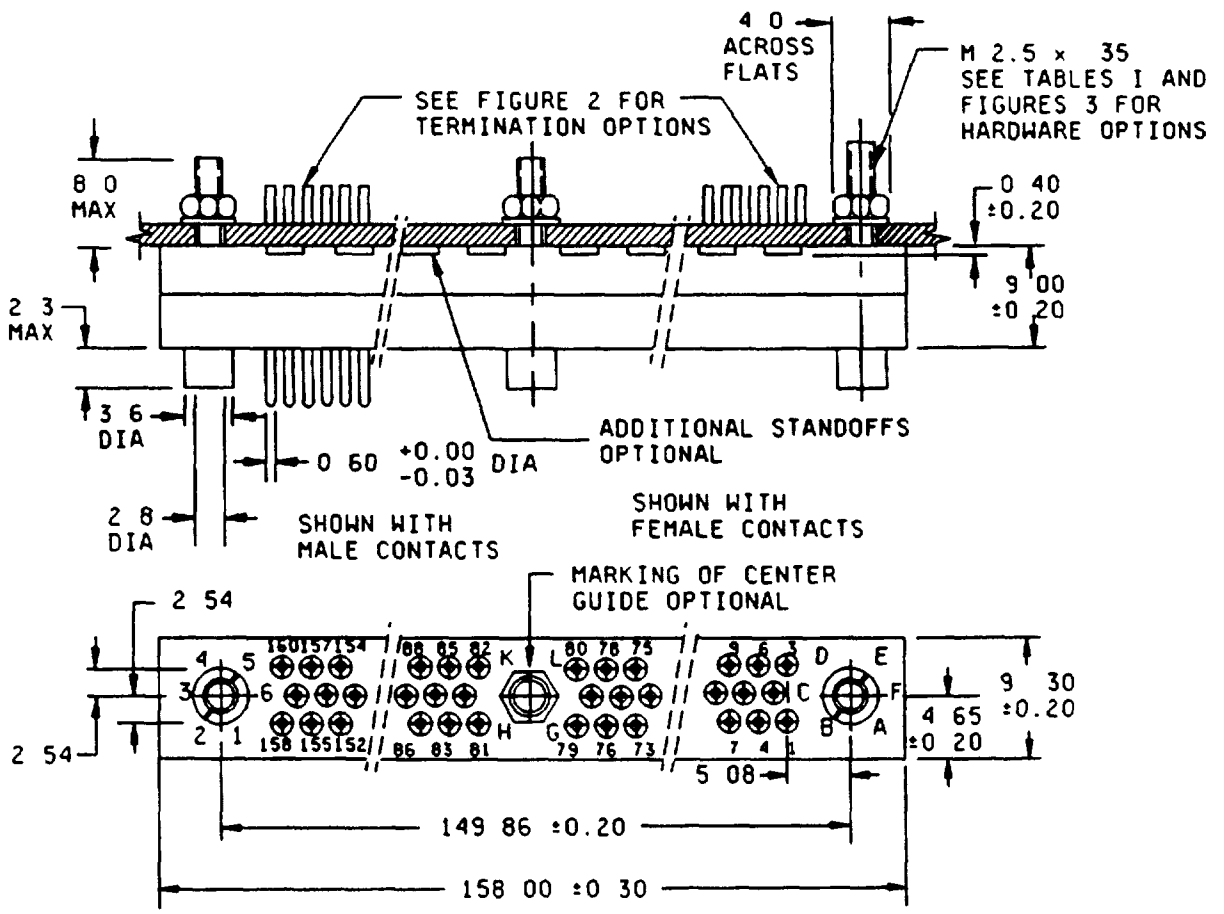


NOTE Dimensions are in millimeters

FIGURE 1 Connector receptacle


DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

## TERMINAL STYLES




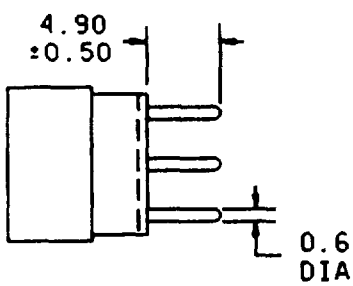
| REF | FEMALE CONTACTS | REF | MALE CONTACTS |
|---|---|---|---|
| J | STRAIGHT DIP SOLDER   | P | STRAIGHT DIP SOLDER   |
| T | STRAIGHT DIP SOLDER   1 6 ( 064 IN) P.C BOARD | U | STRAIGHT DIP SOLDER   1 6 ( 064 IN) P C BOARD |

FIGURE 2 Connector termination styles

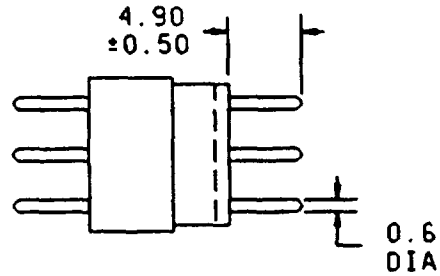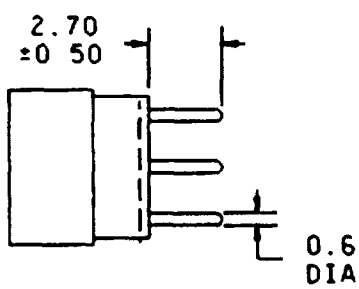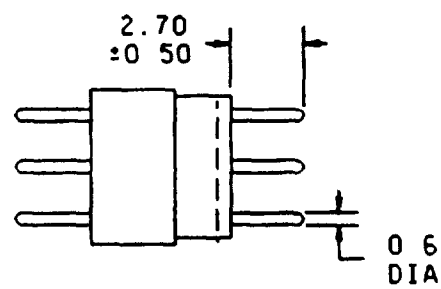

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

## TERMINAL STYLES




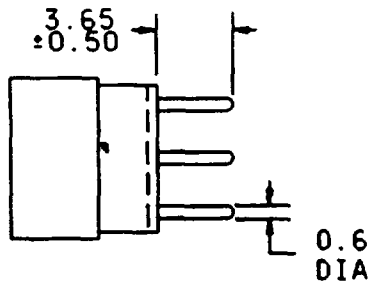
| REF | FEMALE CONTACTS | REF | MALE CONTACTS |
|---|---|---|---|
| N. | STRAIGHT DIP SOLDER<br>  <br>2.4 (.094 IN) P.C BOARD | Z | STRAIGHT DIP SOLDER<br>  <br>2 4 ( 094 IN) P C BOARD |
| V. | STRAIGHT DIP SOLDER<br>  <br>3 2 (.125 IN) P.C BOARD | W. | STRAIGHT DIP SOLDER<br>  <br>3 2 (.125 IN) P.C. BOARD |


FIGURE 2 Connector termination styles Continued

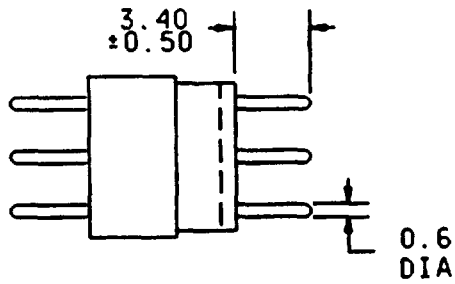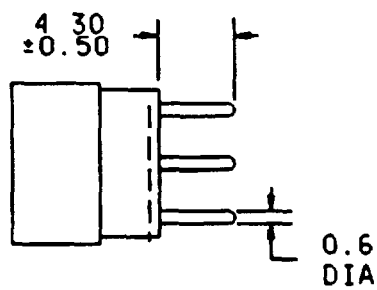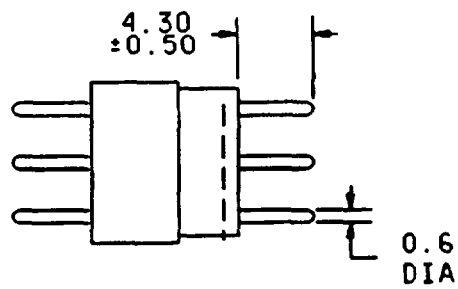


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

## TERMINAL STYLES

| REF FEMALE CONTACTS | REF MALE CONTACTS |
|---|---|
| G WRAP POST | Q WRAP POST |

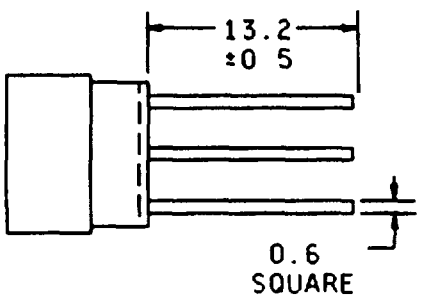

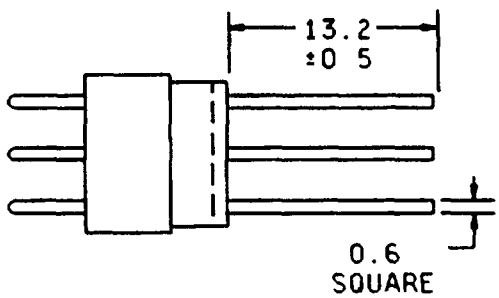
NOTES

1 Dimensions are in millimeters.
2 This is a metric design.
3 Unless otherwise specified, tolerance is ±0.10 millimeter.
4 These connectors mate with MIL-C-55302/164.
5 See table I for mating
6 Contact identification may be located adjacent to cavity on face or side and may be rotated 180°
7 Insulator bodies are not to be bonded or affixed in any way such that the front removal feature of this assembly would be defeated

FIGURE 2 Connector termination styles - Continued

TABLE I. Mating references


| Type | Will only mate with (see note 4) | Locking method |
|---|---|---|
| B | P, U, W | None |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

MOUNTING DIMENSIONS

FOR MOUNTING STYLES B
MOTHER BOARD APPLICATION

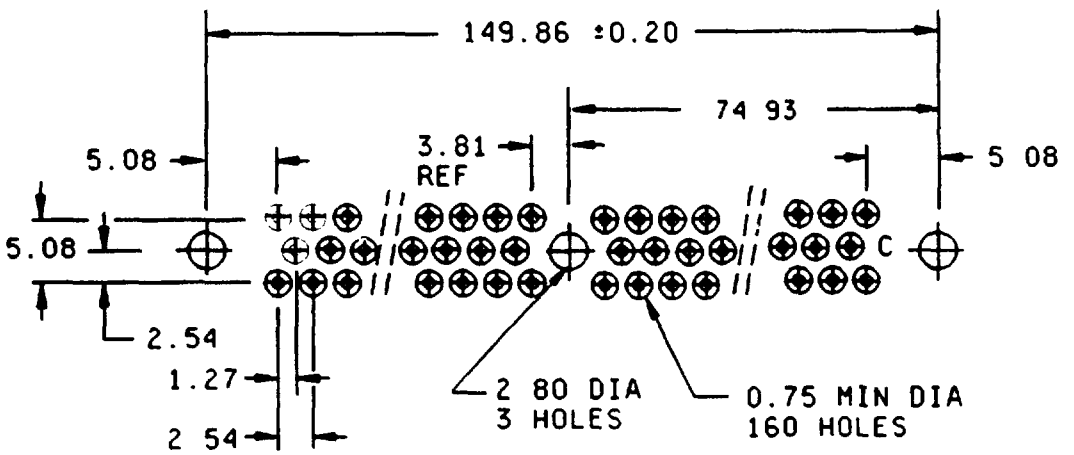


NOTE: TOLERANCES ARE NONCUMULATIVE

NOTE Dimensions are in millimeters

FIGURE 3 Mounting styles



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figures 1 through 3

Material

Insulators Diallyl phthalate in accordance with MIL-M 14.

Guides and hardware Brass in accordance with ASTM B36, B16, B124, B453, or B455, nickel plated in accordance with QQ-N-290 or AISI 300 series stainless steel or equivalent in accordance with QQ-S-763 or ASTM A582, passivated in accordance with QQ P 35

Plating Plating in accordance with MIL-C-55302 or as noted below

Mating surface (pin and wire) Gold in accordance with MIL-G-45204, class 1, type II, grade C over nickel in accordance with QQ-N-290, 30-150 microinches

Terminations. Solderable areas (including crimp barrels and wire wrap terminations) shall be gold in accordance with MIL-G-45204, type III, grade A, 10 microinches minimum thickness or gold in accordance with MIL-G-45204 type II, grade C, class 00 over nickel in accordance with QQ-N-290, 30 to 150 microinches thick Solderable areas must meet the requirements of MIL-STD-202, method 208

All other surfaces. Gold in accordance with MIL-G 45204, type II, grade C, 5 microinches minimum over nickel in accordance with QQ-N-290, 30-150 microinches

Contact identification See figure 1

Contact separation forces

Minimum force: 0.14 newton (0.50 ounce) with a 0 5800 millimeter ( 0228 inch) +0.005/-0 000 diameter pin after being cycled 3 times

Note Steel pin test surface roughness to be 0 025 - 0.25 micron rms.

Unmating The maximum force of a connector assembly shall not exceed 0 53 newton (1 90 ounces) multiplied by the number of contact positions

Mating· The maximum force of a connector assembly shall not exceed 0 70 newton (2.5 ounces) multiplied by the number of contact positions

Contact retention minimum. Functional value of 22 2 newtons (5 pounds), destructive test 35 3 newtons (8 pounds) maximum design and qualification value

Contact rating 5 amperes per line

Durability 2,000 cycles minimum

Dielectric withstanding voltage

Sea level 1,400 V ac rms test


High altitude. 300 V ac rms test

Keying Rotation of guides, 6 positions each, 36 possible combinations



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Connector Part or Identifying Number (PIN)

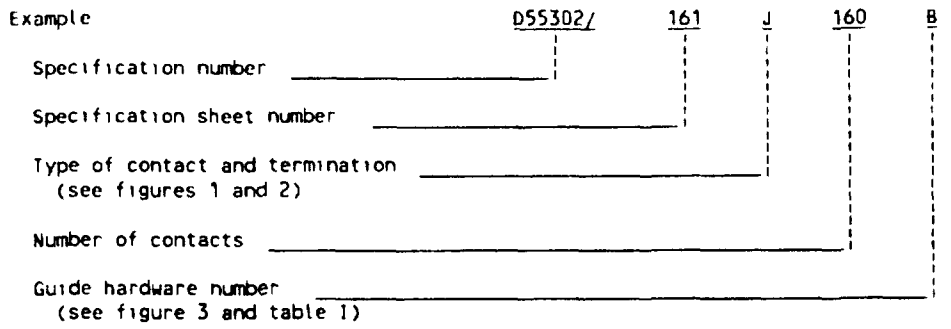


Revision letters are not used due to the extensiveness of the changes

## CONCLUDING MATERIAL

Custodian
Army - CR

Review activities:
Army - AR, AT, AV, ME, MI
DLA - ES

Preparing activity
Army - CR

Agent
DLA - ES

Project 5935-A418-03)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.