MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES
PLUG, PIN CONTACTS, RIGHT-ANGLE, FOR MULTILAYERED PRINTED WIRING BOARDS (.100 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.


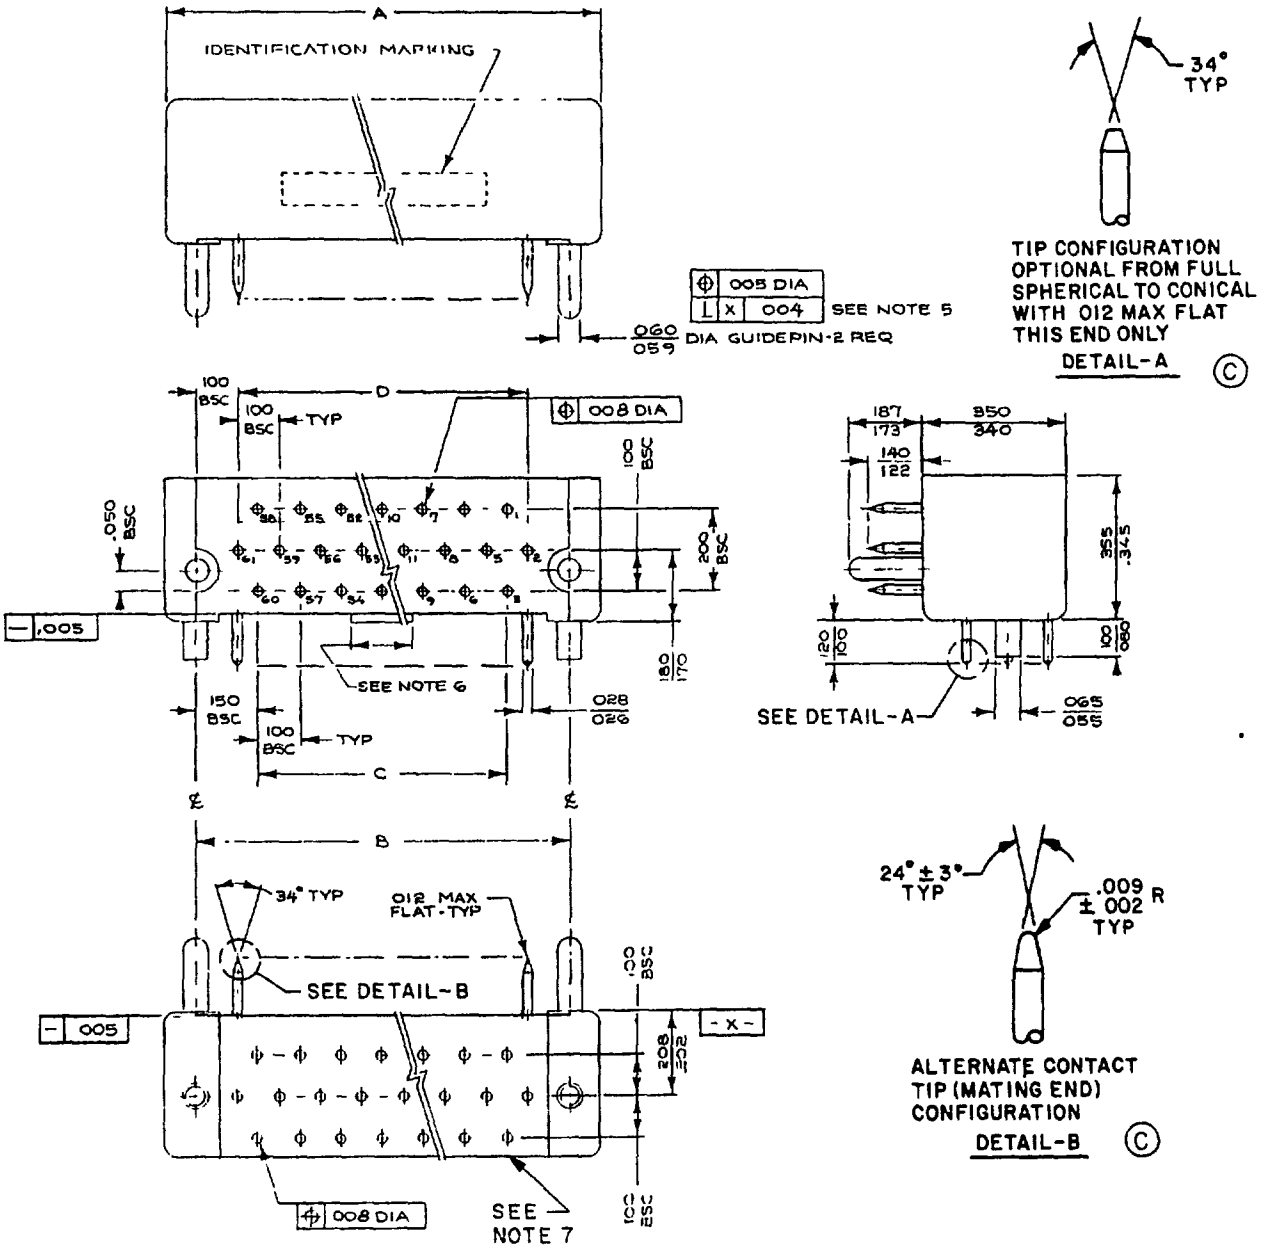


FIGURE 1. Connectors, plug (.100 spacing)

FSC 5935

© denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

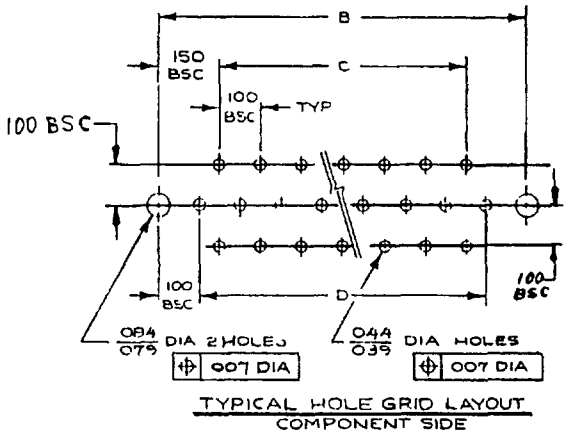

TYPICAL HOLE GRID LAYOUT
COMPONENT SIDE

TABLE I. Dimensions and dash number.

Dash No.	No. of contacts	A	B Basic	C Ref	D Ref
01	13	.800 ±.005	.600	.300	.400
02	25	1.200 ± 005	1.000	700	.800
03	37	1.600 ±.005	1.400	1 100	1 200
04	49	2.000 ± 008	1.800	1.500	1.600
05	61	2.400 ±.008	2 200	1.900	2.000

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.002	.05	.039	.99	.084	2.13	187	4.75	400	10.16	1.600	40.64
.004	.10	.044	1.12	.100	2.54	200	5.08	.600	15.24	1.800	45.72
005	13	.050	1.27	.120	3 05	202	5.13	.700	17.78	1.900	48 26
007	18	055	1.40	.122	3 10	208	5 28	800	20.32	2 000	50.80
.008	.20	.059	1 50	.140	3 56	.300	7.62	1.000	25 40	2 200	55 88
.009	.23	069	1 52	.150	3.81	.340	8 64	1 100	27.94	2 400	60.96
.012	.30	.065	1.65	.170	4.32	345	8 76	1.200	30.48		
.026	66	070	2 01	.173	4 39	.350	8.89	1.400	35 56		
028	.71	.080	2.03	.180	4.57	.355	9 02	1.500	38.10		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals and ±2° on angles.
4 These connectors mate with connectors specified in MIL-C-55302/8, and are primarily for use with multilayered printed wiring boards.
5. Positional tolerances of guide pins shall apply at datum plane X.
6. Pad(s) suitable for printed circuit board support are required Dimensions and location(s) are optional.
7 The terminating side and the side opposite mating face of the plug may be open or solid construction.

FIGURE 1 Connectors, plug (100 spacing) - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction.
Dimensions and configuration: See figure 1.
Material:
Guide pins and guide bushing. Brass composition B, 60,000 to 70,000 PSI tensile, as specified in QQ-W-321, or FC brass as specified in QQ-B-626.
(C) Plating:
Guide pins and guide bushings. Gold over copper, type II, class 1, grade C, as specified in MIL-G-45204.
Contact: Gold per MIL-G-45204, type II, grade C, Class 1, over nickel plating per QQ-N-290, Class 2, 50 to 150 microinches.
Contact identification. Shall be numerical and sequential in the pattern indicated.
Pin size: 23
Wire size: 22
Current rating: 5 amperes, maximum.

Mating and unmating: The maximum insertion force, in pounds shall not exceed a value equal to .5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .11 times the number of contacts, and shall not exceed the measured insertion force.

Contact resistance. The average resistance of all contact pairs measured shall not exceed .010 ohm, and no individual contact pair shall have a resistance exceeding .020 ohm.

Dielectric withstanding voltage:
Sea level: 1,000 volts rms, 60 Hz, ac.
High altitude: 500 volts rms, 60 Hz, ac.

Part number: M55302/7- (dash number from figure 1).

Replacement data. The connectors covered by this specification were formerly identified with printed circuits as UPC-150-MR-( ).

Custodians.
Army - CR
Navy - EC
Air Force - 17

Review Activities.
Army - MI,
Navy - AS
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - AT, AV,
Navy - MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3095-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-55302/7C

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN. DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN. DRDCO-CM-DM
Fort Monmouth NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID

U.S.MAIL

HQ, USA CORADCOM
ATTN. DRDCO-CM-DM
Fort Monmouth NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.