
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
CONTACTS, HERMAPHRODITIC, CRIMP REMOVABLE FOR WIRE (STRANDED)

This specification sheet is approved for use by the Communications Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contacts described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

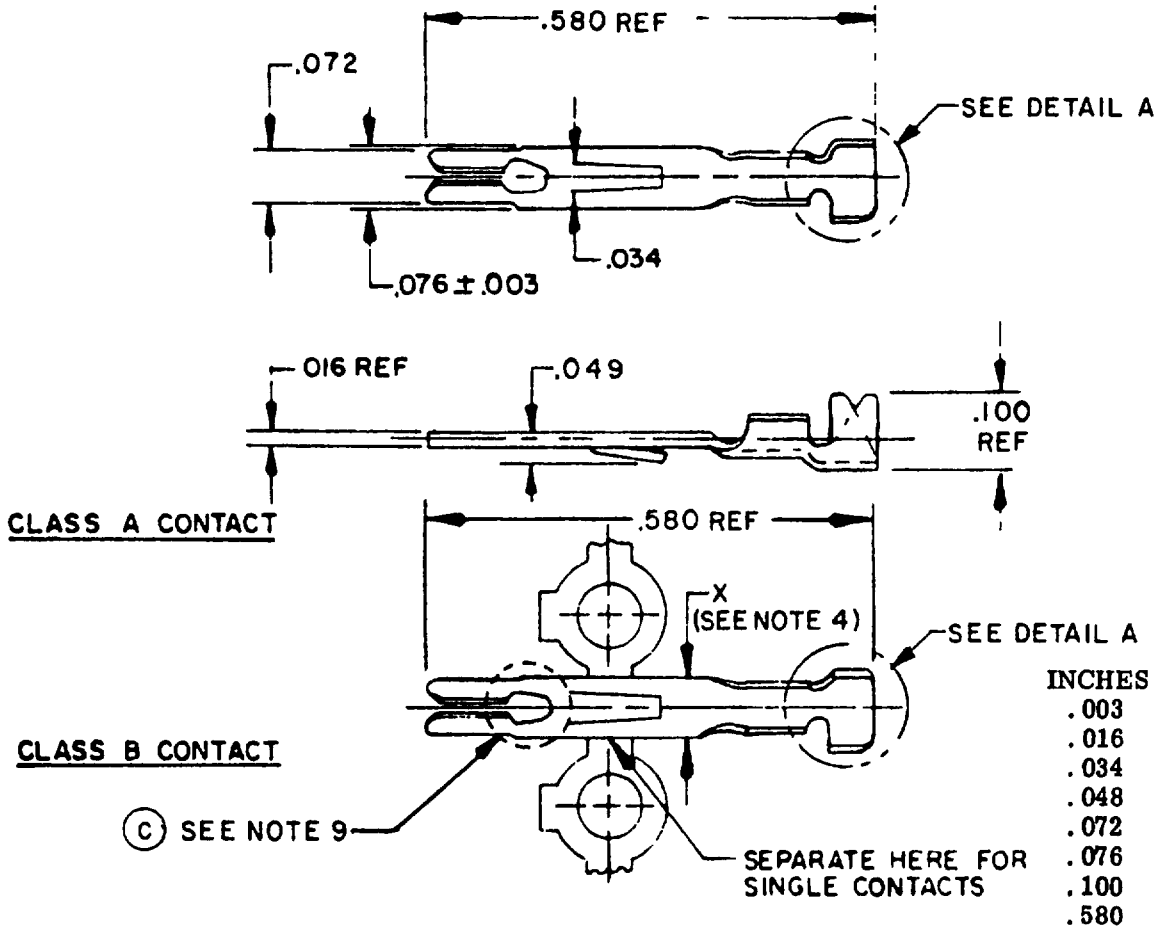


INCHES	MM
.003	.08
.016	.41
.034	.86
.048	1.22
.072	1.83
.076	1.93
.100	2.54
.580	14.73

C FIGURE 1. Contact, hermaphroditic, crimp removable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.


C denotes changes

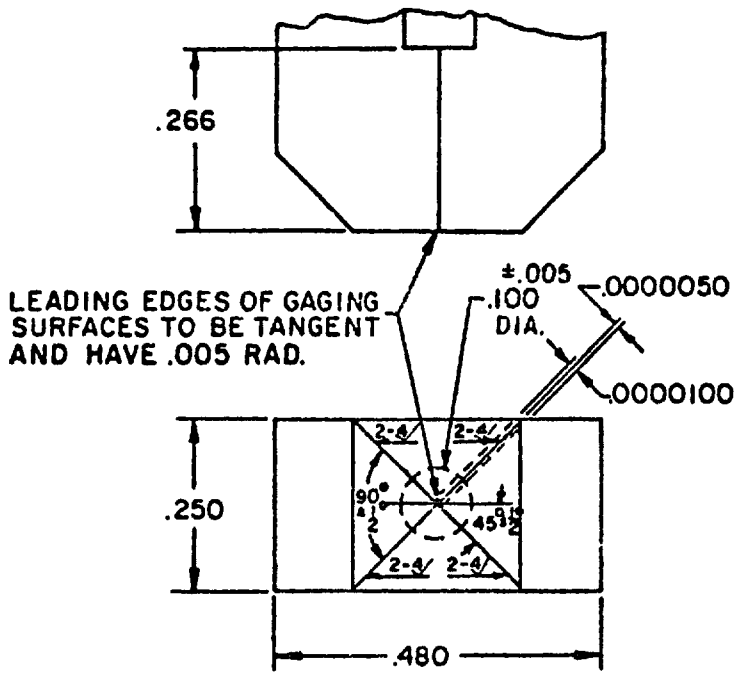

INCHES	MM
.0000050	.000127
.0000100	.000254
.001	.03
.005	.13
.250	6.35
.266	6.76
.480	12.19

Material: Medium alloy steel bonded titanium carbide, rockwell-C-67-69

Configuration A, test gage.

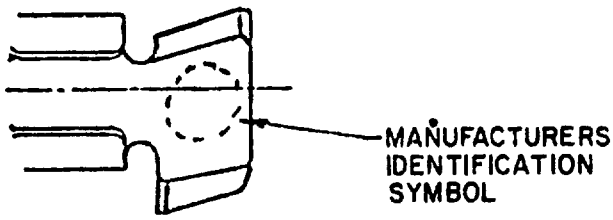

DETAIL A

Manufacturer's identification symbol shall be imprinted approximately as shown.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Tolerance shall be ±.005 (.13 mm) unless otherwise specified. All dimensions are for parts after plating.
4. Trip area not to exceed width of contact across retaining lance area "X".
5. Contact crimp for use with (AWG) wire range 22 to 30 stranded type E per MIL-W-16878.
6. Remove all burrs and sharp edges .001 inch (.03 mm) maximum.
7. Crimp tool MIL-C-22520/17-02.
8. Contact insertion and removal tool MIL-T-81969/5-01 and MIL-T-81969/4-02.
9. Contact relief hole configuration, optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Phosphor bronze per QQ-B-750, composition "A".

Plating: The contact plating shall be gold per MIL-G-45204, type II, grade D, class 1, over nickel plating per QQ-N-290, class 2, 30 to 150 microinches in contact engagement area for .120 inch minimum (see figure 1). The remainder of the contact shall be gold per MIL-G-45204, type II, grade D, 10 microinches minimum, over nickel plating per QQ-N-290, class 2, 30 to 150 microinches.

Contact separating force (see configuration A):

Polished steel gage from unplated contacts: 1 ounce minimum.

Plated gold over nickel contacts (contact to contact): 2 to 10 ounces.

Current rating: 5 amperes, 22 AWG wire.

Identification of contact:

Contacts shall be permanently imprinted with manufacturer's symbol for purpose of identifying manufacturer's product (see detail A).

Application: Contact, hermaphroditic, crimp removable for wire (stranded), are to be used with connectors, MIL-C-55302/93 and MIL-C-55302/94, and MIL-C-55302/102 through MIL-C-55302/104.

Part number: M55302/97-01, supplied loose for hand crimping installation.
M55302/97-02, supplied on a reel containing 3000 contacts for automatic crimping machine installation.

All contacts shall be tested and qualified in accordance with the applicable connector specification sheet.

Custodian:
Army - CR

Review activities:
Army - AT, AV, MI
DLA - ES

User activities:
Army - AR, ME

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-A141-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
FORT MONMOUTH, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.