INCH-POUND
MS15535L
24 September 2021
SUPERSEDING
MS15535K
5 April 1988

DETAIL SPECIFICATION SHEET

LAMPS, INCANDESCENT, SEALED BEAM, PAR-56, SCREW TERMINAL BASE

Inactive for new design after 1 December 2006


This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Comments, suggestions, or questions on this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:48Z
Check the source to verify that this is the current version before use.

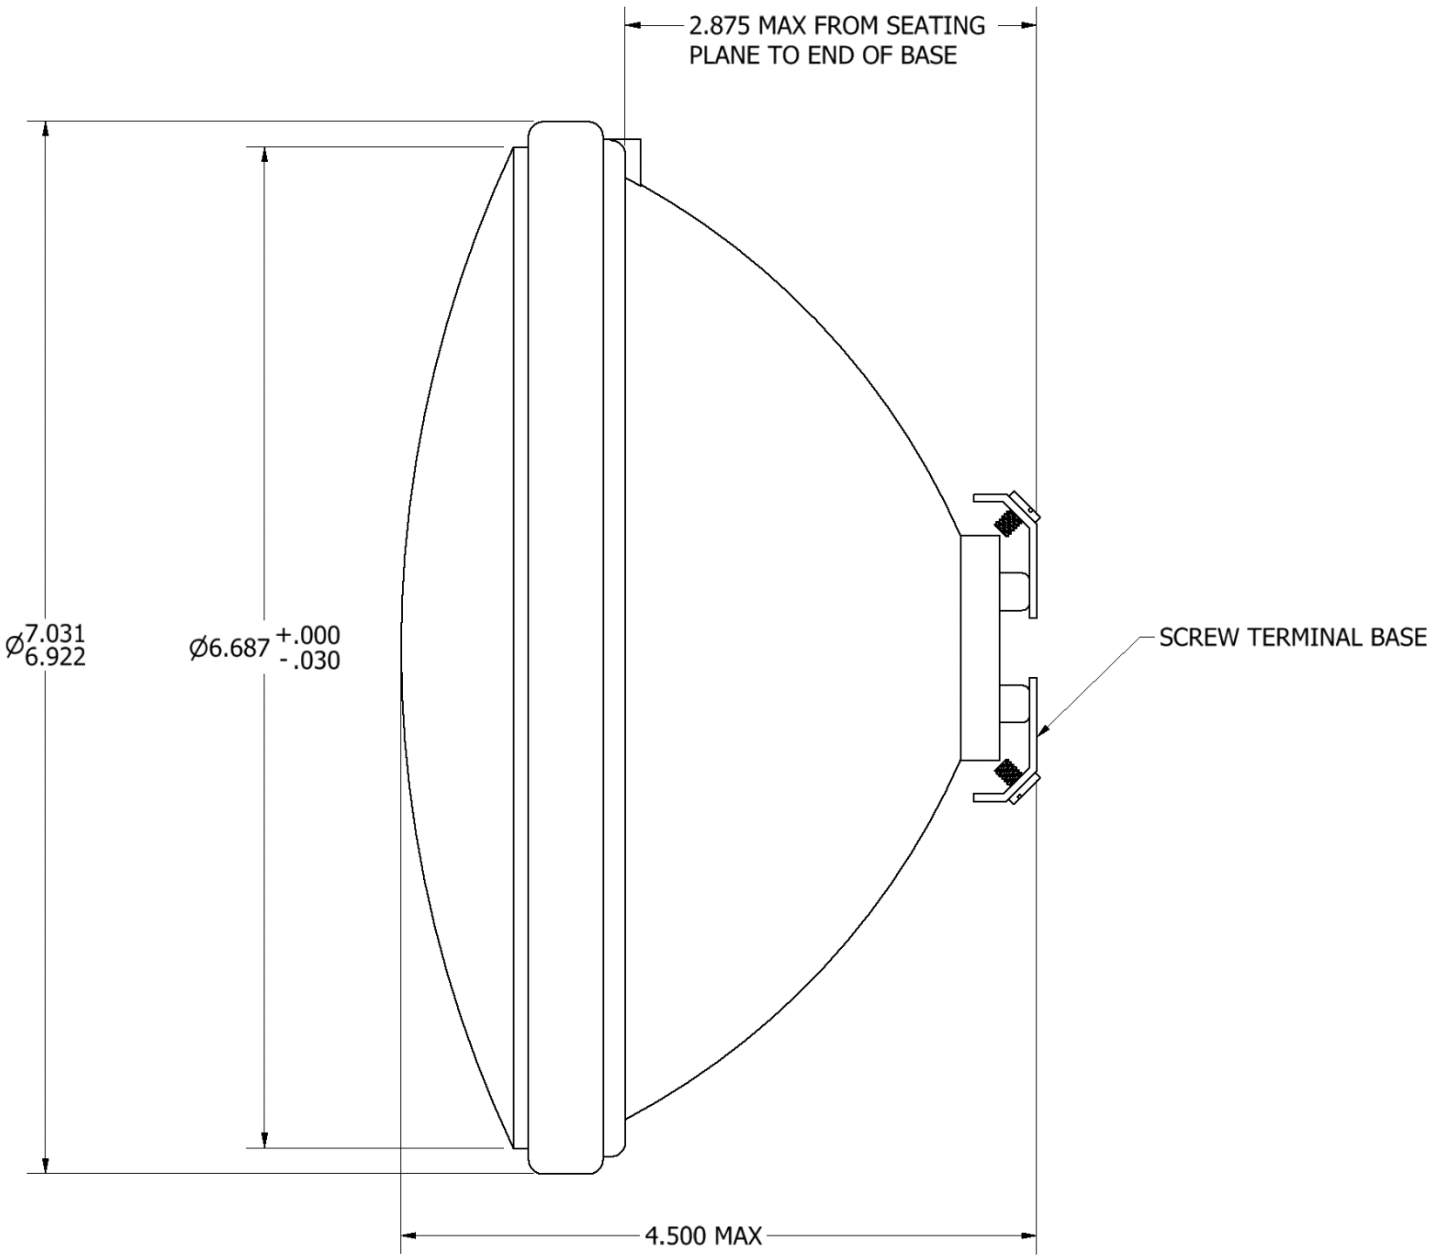

NOTES:

1. Dimensions are in inches
2. For design feature purposes, this specification takes precedence over procurement documents referenced herein.
3. Referenced documents shall be of the issues in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.

FIGURE 1. Design and Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:48Z
Check the source to verify that this is the current version before use.

3D Model for reference only.

FIGURE 1. Design and Construction - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:48Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Number

MS Part Number	Design		Initial max beam candlepower (approx.)	Filament	Beam spread in degrees (approx.)		Hours Life Approx	Industry Number	Use
	Volts	Watts			Hor	Vert			
MS15535-1	12.5	100	250,000	C-6	9	5	50	4543	Special server
MS15535-2	26	250	110,000	C-13	24	13	500	4548	Sea rescue light
MS15535-3	26	250	30,000	C-13	40	18	500	4549	Sea rescue light
MS15535-4	120	300	70,000	CC-13	20	15	2,000	300PAR56/2SP	Flood light
MS15535-5	12	100	225,000	C-6	9	5	100	4545	Mirror deck landing (source light)
MS15535-6	120	300	10,000	CC-13	60	30	2,000	300PAR56/4WFL	Flood light
MS15535-8	120	300	24,000	CC-13	35	20	2,000	300PAR56/4WFL	Flood light

NOTES:

1. This standard established the overall dimensions and detail engineering requirements for incandescent lights.
2. Beam spread shall be taken with lamp having the screw terminals in the vertical position as shown in Figure 1.
3. Part number MS15535-7, use part number AA52409-4541

Referenced documents. This document references the following:
A-A-52409

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR4
Navy - SH
DLA - GS

Preparing Activity:
DLA – GS2

(Project 6240-2021-007)

Reviewer Activities:
Army - AT
Navy - MC, SA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:48Z
Check the source to verify that this is the current version before use.