THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA ES
REVIEW Air Force 11, 17, 99
USER*
PROJECT NUMBER 5935-F361-02
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET

TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT MINIATURE

SPECIFICATION SHEET NUMBER MS24265N(USAF) 7 Sept 90


SUPERSEDING MS24265M 14 Nov 77

AMSC N/A FSC 5935

Page 1 of 8

DD Form 672, MAY 88

Ⓝ denotes change

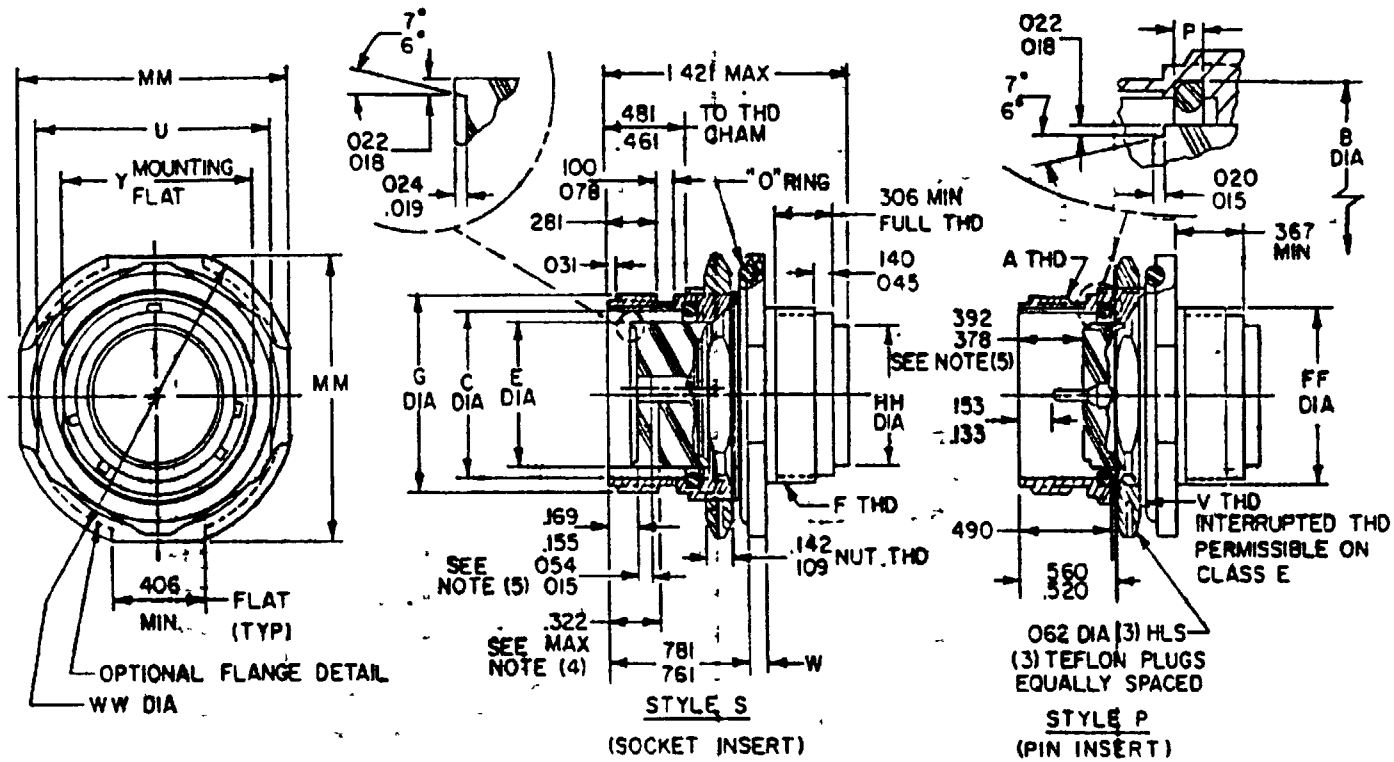

INACTIVE FOR AIR FORCE NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT AFTER 14 NOV 1977.

Use MIL-C-83723, Series III, connector which is interchangeable.

SHELL DESIGN FOR CLASSES R,F&G (SEE NOTE 12)

Inches	mm	Inches	mm
.015	0.38	.169	4.29
.018	0.46	.281	7.14
.019	0.48	.306	7.77
.020	0.51	.322	8.18
.022	0.56	.367	9.32
.024	0.61	.378	9.60
.031	0.79	.392	9.96
.045	1.14	.406	10.31
.054	1.37	.461	11.71
.062	1.57	.481	12.21
.078	1.98	.490	12.45
.100	2.54	.520	13.20
.109	2.77	.560	14.22
.133	3.38	.761	19.33
.140	3.56	.768	19.51
.142	3.60	1.421	36.09
.153	3.89		
.155	3.94		


Form Approved OMB No. 0704-0188


Source: Approved for public release; distribution is unlimited.
Click the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704 0188

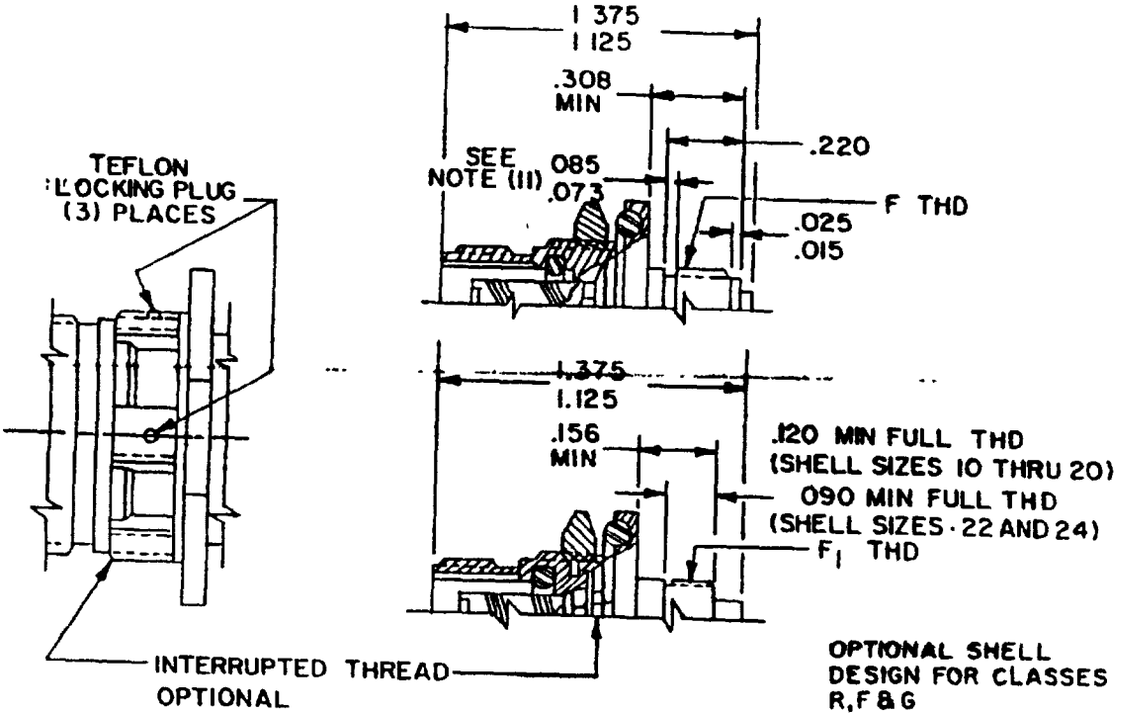

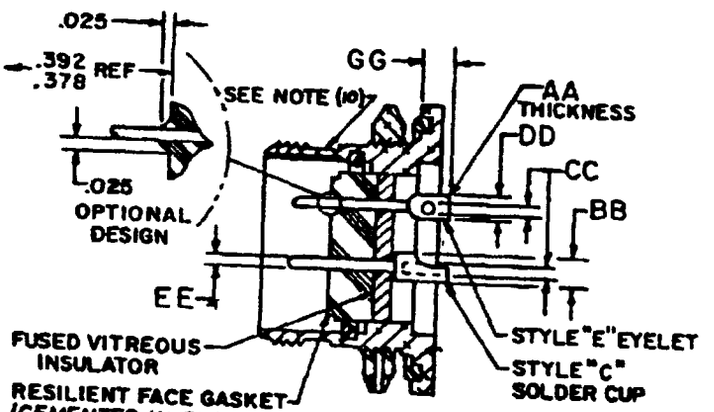

STYLE P (PIN INSERT)
HERMETIC (CLASS "H") RECEPTACLES, TYPE "T"
THIS RECEPTACLE MATES WITH MS24266, TYPE "T"

STAINLESS STEEL
SHELL DESIGN
FOR CLASS E

(SEE NOTE 12)

Inches	mm
.015	0.38
.025	0.64
.073	1.85
.085	2.16
.090	2.29
.120	3.05
.156	3.96
.220	5.59
.308	7.82
.378	9.60
.392	9.96
1.125	28.58
1.375	34.92

Ⓝ denotes change

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA - ES REVIEW Air Force 11, 17, 99 USER PROJECT NUMBER 5935-F361-02 DISTRIBUTION STATEMENT	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24265N(USAF) SUPERSEDING MS24265M 14 Nov 77 AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T14:51Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA ES
REVIEW Air Force 11, 17, 99
USER
PROJECT NUMBER 5935-F361-02
DISTRIBUTION STATEMENT

MILITARY SPECIFICATION SHEET

TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT, MINIATURE

SPECIFICATION SHEET NUMBER MS24265N(USAF)


SUPERSEDING MS24265M 14 Nov 77

AMSC N/A FSC 5935

Page 3 of 8

DD Form 672, MAY 88


Ⓝ denotes change

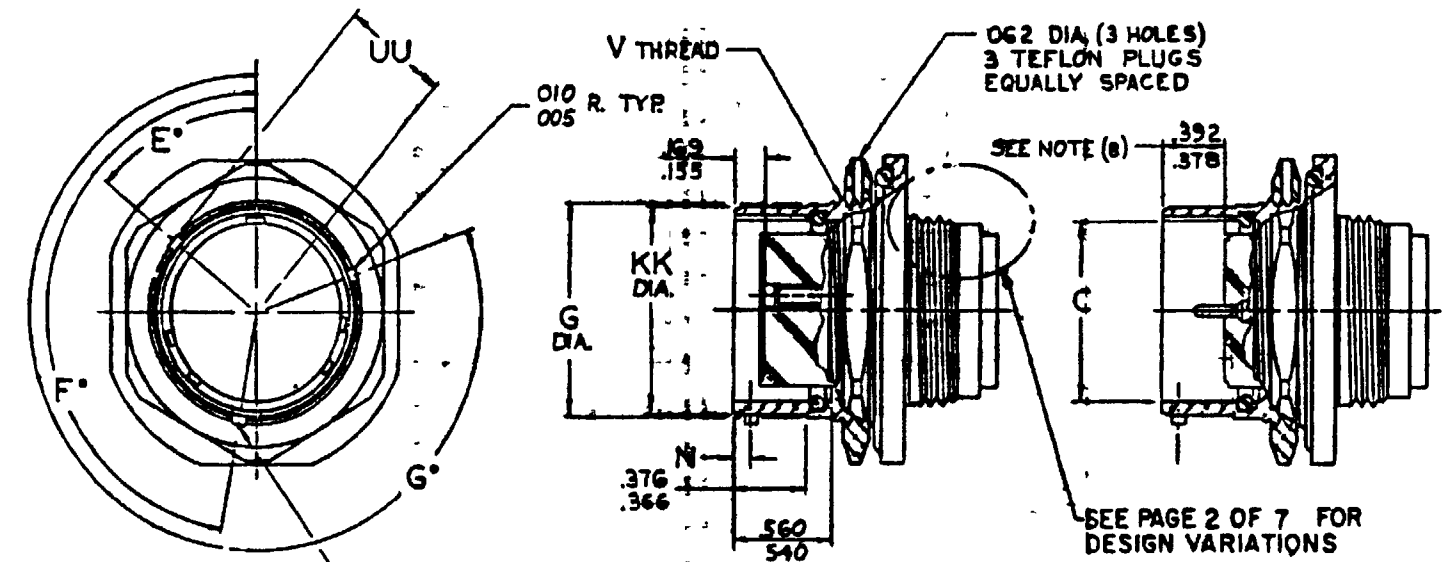

STYLE S
SOCKET INSERT

STYLE P
PIN INSERT

(SEE NOTE 13)

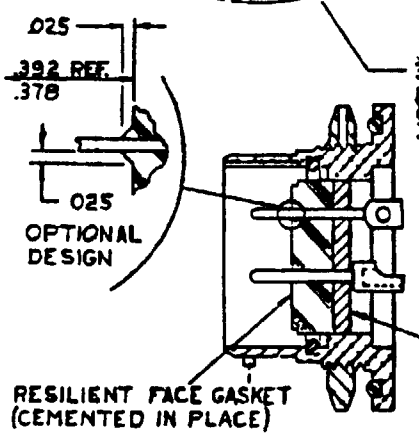

STYLE P (PIN INSERT)
HERMETIC (CLASS "H") RECEPTACLES, TYPE "S"
THIS RECEPTACLE MATES WITH MS 24266, TYPE "B"

Inches	mm
.004	0.10
.005	0.13
.010	0.25
.025	0.64
.062	1.57
.155	3.94
.169	4.29
.366	9.30
.376	9.55
.378	9.60
.392	9.96
.540	12.80
.560	14.22

Form Approved OMB No 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45:17
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704-0188

Shell size	A UNEF-2A CPLG.	B dia	C (N) dia +.005 (0.13) -.000 (0.00)	E max insert	F UNEF-2A access	FF max dia	F_1 -36NS-2A	F_1 pitch dia	G max dia
8	.562-24 (14.27)	.508 (12.90)	.428 (10.87)	.312 (7.92)	.437-28 (11.10)	.437 (11.10)	.4340 (11.024)	.4151/.4114 (10.544/10.450)	.561 (14.25)
10	.687-24 (17.45)	.636 (16.15)	.530 (13.46)	.388 (7.92)	.562-24 (14.27)	.562 (14.27)	.5634 (14.310)	.5454/.5415 (13.853/13.754)	.696 (17.68)
12	.875-20 (22.22)	.806 (20.47)	.700 (17.80)	.558 (7.92)	.750-20 (19.05)	.750 (19.05)	.7334 (18.628)	.7154/.7115 (18.171/18.072)	.875 (22.22)
14	.973-20 (23.80)	.875 (22.22)	.769 (19.53)	.627 (7.92)	.812-20 (20.62)	.812 (20.62)	.8032 (20.401)	.7841/.7806 (19.916/19.827)	.935 (23.75)
16	1.062-18 (26.97)	1.002 (25.45)	.896 (12.76)	.754 (7.92)	.937-20 (23.80)	.938 (23.82)	.9302 (23.627)	.9110/.9074 (23.139/23.048)	1.062 (26.97)
18	1.187-18 (30.15)	1.108 (28.14)	1.002 (25.45)	.860 (7.92)	1.062-18 (26.97)	1.062 (26.97)	1.0362 (26.319)	1.0171/1.0134 25.834/25.740)	1.187 (30.15)
20	1.312-18 (33.32)	1.233 (31.32)	1.127 (28.62)	.985 (7.92)	1.187-18 (30.15)	1.182 (30.15)	1.1611 (29.492)	1.1431/1.1385 (29.035/28.918)	1.312 (33.32)
22	1.437-18 (36.50)	1.358 (34.49)	1.252 (31.80)	1.110 (7.92)	1.312-18 (33.32)	1.312 (33.32)	1.2862 (32.669)	1.2670/1.2633 (32.182/32.088)	1.437 (36.50)
24	1.562-18 (39.67)	1.483 (37.67)	1.377 (34.98)	1.235 (7.92)	1.437-18 (36.50)	1.432 (36.50)	1.4111 (35.842)	1.3931/1.3885 (35.385/35.268)	1.562 (39.67)

(N) denotes change

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY NAVY AIR FORCE - 85 DLA-ES REVIEW: Air Force 11, 17, 99 USER PROJECT NUMBER 5935-F361-02	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24265N(USAF) SUPERSEDING MS24265M 14 Nov 77 AMSC N/A FSC 5935
DISTRIBUTION STATEMENT		Page 4 of 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:517
Check the source to verify that this is the current version before use.

THIS SPECIFICATION APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

Shell size	HH max GROM dia	KK +.000 (0.00) -.005 (0.13)	MM	N dia +.000 (0.00) -.004 (0.10)	NN dia +.000 (0.00) -.003 (0.07)	P dia +.000 (0.00) -.005 (0.13)	S	U max hex	UU +.000 (0.00) -.009 (0.22)	V UNEF-2A	W ±.020 (0.51)	WW max dia	Y ±.003 (0.08)	Z dia
8	.328 (8.33)	.563 (14.30)	.979 (24.97)	.101 (2.56)	.078 (1.98)	.076 (1.93)	.605 (15.37)	.828 (21.03)	.310 (7.87)	.625-20-UN-2A (15.88)	.117 (2.97)	1.068 (27.13)	.593 (15.06)	.635 (16.13)
10	.420 (10.67)	.659 (16.74)	1.104 (28.04)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.730 (18.54)	.953 (24.21)	.374 (9.50)	.750-20 (19.05)	.117 (2.97)	1.192 (30.28)	.718 (18.24)	.760 (19.30)
12	.580 (14.73)	.829 (21.06)	1.291 (32.79)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.917 (23.29)	1.140 (28.46)	.459 (11.66)	.937-20 (23.80)	.117 (2.97)	1.380 (35.05)	.905 (22.99)	.947 (24.05)
14	.664 (16.86)	.898 (22.81)	1.391 (35.33)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.980 (24.89)	1.250 (31.75)	.494 (12.55)	1.000-20 (25.40)	.117 (2.97)	1.505 (38.23)	.968 (24.59)	1.010 (25.65)
16	.769 (19.53)	1.025 (26.34)	1.516 (38.51)	.094 (2.39)	.093 (2.36)	.089 (2.26)	1.105 (28.07)	1.329 (33.76)	.557 (14.15)	1.125-20-UN-2A (28.58)	.117 (2.97)	1.630 (41.40)	1.093 (27.76)	1.135 (28.83)
18	.902 (22.91)	1.131 (28.73)	1.641 (41.68)	.094 (2.39)	.093 (2.36)	.089 (2.26)	1.225 (31.12)	1.455 (36.96)	.610 (15.49)	1.250-20-UN-2A (31.75)	.117 (2.97)	1.740 (44.20)	1.217 (30.91)	1.260 (32.00)
20	1.033 (26.84)	1.256 (31.90)	1.766 (44.86)	.094 (2.39)	.093 (2.36)	.089 (2.26)	1.350 (34.29)	1.642 (41.71)	.673 (17.09)	1.375-18 (34.92)	.117 (2.97)	1.860 (47.24)	1.342 (34.09)	1.385 (35.18)
22	1.152 (29.26)	1.381 (35.08)	1.954 (49.63)	.094 (2.39)	.093 (2.36)	.089 (2.26)	1.475 (37.46)	1.705 (43.31)	.735 (18.67)	1.500-20-UN-2A (38.10)	.148 (3.76)	2.040 (51.82)	1.467 (37.26)	1.510 (38.35)
24	1.282 (32.56)	1.506 (38.25)	2.079 (52.81)	.094 (2.39)	.093 (2.36)	.089 (2.26)	1.600 (40.64)	1.892 (48.06)	.798 (20.27)	1.625-18 (41.28)	.148 (3.76)	2.160 (54.86)	1.592 (40.44)	1.635 (41.53)

Ⓝ denotes change

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - ; AIR FORCE - 85 ; NAVY - ; DLA - ES
REVIEW: Air Force 11, 17, 99
USER
PROJECT NUMBER 5935-F361-02
DISTRIBUTION STATEMENT

TITLE: CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT, MINIATURE

MILITARY SPECIFICATION SHEET

SPECIFICATION SHEET NUMBER: MS24265M(USAF)
SUPERSEDING: MS24265M
14 Nov 77
AMSC N/A
FSC 5935

DD Form 672, MAY 88
Page 5 of 8

Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil/wwd/Downloaded on 2026-10-23 14:51Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

Position	Shell size 8			Shell size 10			Shell size 12 thru 24		
	E°	F°	G°	E°	F°	G°	E°	F°	G°
Normal	60	180	300	60	180	300	50	170	290
6	46	166	286	46	166	286	50	170	290
7	46	166	286	46	166	286	50	170	290
8	60	180	300	60	180	300	50	170	290
9	89	209	329	89	209	329	50	170	290
(N) Y	--	--	--	60	180	300	50	170	290

Size of contact	Type of contact	AA	BB dia	CC dia min	DD	EE dia	GG max
12	Solder cup		.150 (3.81)	.112 (2.84)		.095/.093 (2.41)(2.36)	.235 (5.97)
12	Eyelet	.035 (0.89)			.200 (5.08)	.095/.093 (2.41)(2.36)	.235 (5.97)
16	Solder cup		.103 (2.61)	.069 (1.75)		.063/.061 (1.60)(1.55)	.235 (5.97)
16	Eyelet	.025 (0.64)			.125 (3.18)	.063/.061 (1.60)(1.55)	.235 (5.97)
20	Solder cup		.077 (1.96)	.042 (1.07)		.041/.039 (1.04)(0.99)	.165 (4.19)
20	Eyelet	.015 (0.38)			.080 (2.03)	.041/.039 (1.04)(0.99)	.165 (4.19)

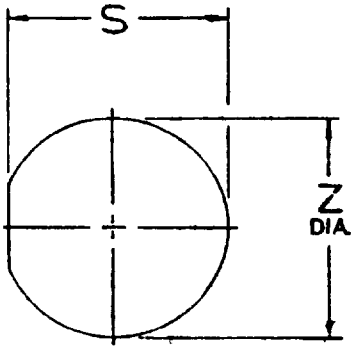

PANEL CUT-OUT

Shell size	F1 -36WS-2A	F1 PITCH DIAMETER
8	.4340	.4151/ .4114
10	.5634	.5454/ .5415
12	.7334	.7154/ .7115
14	.8032	.7841/ .7806
16	.9302	.9110/ .9074
18	1.0362	1.0171/1.0134
20	1.1611	1.1431/1.1385
22	1.2862	1.2670/1.2633
24	1.4111	1.3931/1.3885

(N) denotes change

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA - ES
REVIEW Air Force 11, 17, 99
USER
PROJECT NUMBER 5935-F361-02

MILITARY SPECIFICATION SHEET

TITLE
CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT, MINIATURE

SPECIFICATION SHEET NUMBER
MS24265N(USAF)

SUPERSEDING
MS24265M 14 Nov 77

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No 0704-0188

FOUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SH ...TION
SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DOCUMENTS SPECIFIED IN
THE SOLICITATION MIL-C-26500

THIS SPECIFICAT... APPROVED FOR USE BY all Departments
... and Agencies of the Department of Defense.

Weight chart

Maximum connector weight in pounds

Pin insert			Socket insert		
MS part no.	Less contacts	With contacts	MS part no.	Less contacts	With contacts
MS24265R8T2PN	.027 (0.68)	.029 (0.74)	MS24265R8T2SN	.028 (0.71)	.030 (0.76)
MS24265R10T2PN	.045 (1.14)	.047 (1.19)	MS24265R10T2SN	.046 (1.17)	.048 (1.22)
MS24265R10T5PN	.044 (1.12)	.048 (1.22)	MS24265R10T5SN	.046 (1.14)	.049 (1.24)
MS24265R10T20PN	.045 (1.14)	.049 (1.24)	MS24265R10T20SN	.046 (1.17)	.050 (1.27)
MS24265R12T3PN	.061 (1.55)	.066 (1.68)	MS24265R12T3SN	.063 (1.60)	.068 (1.73)
MS24265R12T12PN	.059 (1.50)	.069 (1.75)	MS24265R12T12SN	.060 (1.52)	.070 (1.78)
MS24265R14T3PN	.073 (1.85)	.083 (2.11)	MS24265R14T3SN	.079 (2.01)	.088 (2.24)
MS24265R14T4PN	.073 (1.85)	.087 (2.21)	MS24265R14T4SN	.075 (1.90)	.089 (2.26)
MS24265R14T7PN	.073 (1.85)	.085 (2.16)	MS24265R14T7SN	.075 (1.90)	.087 (2.21)
MS24265R14T12PN	.073 (1.85)	.086 (2.18)	MS24265R14T12SN	.075 (1.90)	.088 (2.24)
MS24265R14T15PN	.073 (1.85)	.086 (2.18)	MS24265R14T15SN	.075 (1.90)	.087 (2.21)
MS24265R16T10PN	.084 (2.13)	.102 (2.59)	MS24265R16T10SN	.086 (2.18)	.104 (2.64)
MS24265R16T24PN	.084 (2.13)	.104 (2.64)	MS24265R16T24SN	.086 (2.18)	.106 (2.69)
MS24265R18T8PN	.102 (2.59)	.131 (3.33)	MS24265R18T8SN	.105 (2.67)	.133 (3.38)
MS24265R18T11PN	.101 (2.56)	.125 (3.18)	MS24265R18T11SN	.104 (2.64)	.127 (3.22)
MS24265R18T14PN	.101 (2.56)	.127 (3.22)	MS24265R18T14SN	.105 (2.67)	.131 (3.33)
MS24265R18T31PN	.100 (2.54)	.127 (3.22)	MS24265R18T31SN	.104 (2.64)	.130 (3.30)
MS24265R20T16PN	.116 (2.95)	.144 (3.66)	MS24265R20T16SN	.122 (3.10)	.150 (3.81)
MS24265R20T25PN	.114 (2.90)	.152 (3.86)	MS24265R20T25SN	.120 (3.05)	.157 (3.99)
MS24265R20T28PN	.115 (2.92)	.150 (3.81)	MS24265R20T28SN	.120 (3.05)	.154 (3.91)
MS24265R20T39PN	.115 (2.92)	.150 (3.81)	MS24265R20T39SN	.120 (3.05)	.154 (3.91)
MS24265R20T41PN	.115 (2.92)	.149 (3.78)	MS24265R20T41SN	.120 (3.05)	.154 (3.91)
MS24265R22T12PN	.134 (3.40)	.177 (4.50)	MS24265R22T12SN	.141 (3.68)	.183 (4.65)
MS24265R22T19PN	.137 (3.50)	.172 (4.37)	MS24265R22T19SN	.144 (3.66)	.178 (4.52)
MS24265R22T32PN	.138 (3.50)	.181 (4.60)	MS24265R22T32SN	.144 (3.66)	.187 (4.75)
MS24265R22T55PN	.133 (3.38)	.180 (4.57)	MS24265R22T55SN	.139 (3.53)	.185 (4.70)
MS24265R24T43PN	.153 (3.89)	.208 (5.28)	MS24265R24T43SN	.158 (4.01)	.212 (5.38)
MS24265R24T57PN	.152 (3.86)	.205 (5.21)	MS24265R24T57SN	.157 (3.99)	.209 (5.31)
MS24265R24T61PN	.150 (3.81)	.201 (5.10)	MS24265R24T61SN	.155 (3.94)	.205 (5.21)

NOTE: Threaded connectors, classes F, G, and R.

(N) denotes change

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY NAVY -
AIR FORCE - 85 DLA - ES
REVIEWER: Air Force 11. 17. 99
USER:
PROJECT NUMBER 5935-F961-02

MILITARY SPECIFICATION SHEET
TITLE
CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT, MINIATURE

SPECIFICATION SHEET NUMBER
MS24265N(USAF)
SUPERSEDING
MS24265M 14 Nov 77
AMSC N/A FSC 5935

DISTRIBUTION STATEMENT

DD Form 672, MAY 88 Previous editions are obsolete.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704-0188

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only.
4. All diameters to be concentric with each other within .015 T.I.R.
5. All diameters in the same plane to be concentric with each other with each other within .004 T.I.R.
6. Contacts to be in accordance with MIL-C-39029 true position (T.P.) tolerances specified are for maximum material conditions (M.M.C.)
7. Distance between end of shell and the point at which a gauge pin having the same basic diameter as the mating contact and a square face, engages socket contact spring.
8. Dimensions on pin and socket contact locations and end of shells to insert faces apply when contacts are placed in inserts for inspection or application.
9. .133 dimension may reduce to .118 minimum under pressures caused by molded cable assemblies or sharp cable bends. For accessories used with this connector see 3.4.7 of procurement specification. Dimensions in inches unless otherwise specified, tolerances-decimals-*.005. Referenced documents shall be the issue in effect on date of invitations for bid. This standard takes precedence over documents referenced herein. Use tool MS24256A to assemble contacts into this connector, use tool MS24266R to remove contacts from this connector.
10. Thread relief groove is optional on shell. When groove is omitted, the length of full thread from front of shell will be .310 minimum and thread runout .385 maximum.
11. Thread relief groove is optional on shell. When groove is omitted, the length of full thread from rear of shell will be .221 minimum.
12. Environment resistant (class F and R) receptacles, type T aluminimum shell material. Grounding environment resistant (Class G) receptacles, type T aluminimum shell material. Grounding environment resistant (Class G and E) receptacles, type T stainless steel shell material. These receptacles mate with plug MS24266 type T.
13. Environment resistant (Class F and R) receptacles, type B-aluminum shell material. Grounding environment resistant (Class G) receptacles, types B-aluminum shell material. Grounding environment resistant (Class G and E) receptacles, type B-stainless steel shell material. This receptacle mates with plug MS24266 type B.
(N) 14. For insert arrangements and alternate insert keying positions: See MIL-STD-1554.

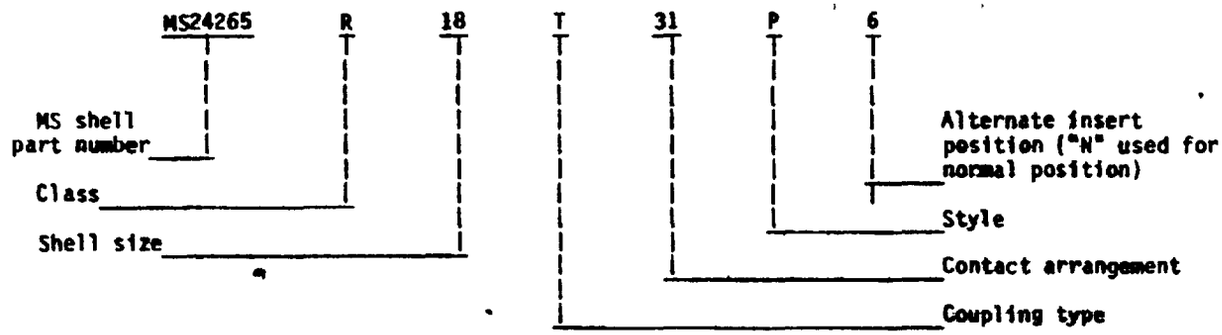

Part number example.

(N) denotes change

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA - ES REVIEW Air Force 11, 17, 99 USER PROJECT NUMBER 5935-F361-02	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, SINGLE HOLE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24265N(USAF) SUPERSEDING MS24265M 14 Nov 77 AMSC N/A FSC 5935
DISTRIBUTION STATEMENT		Page 8 of 8

DD Form 672, MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.