

FED. SUP CLASS
4730

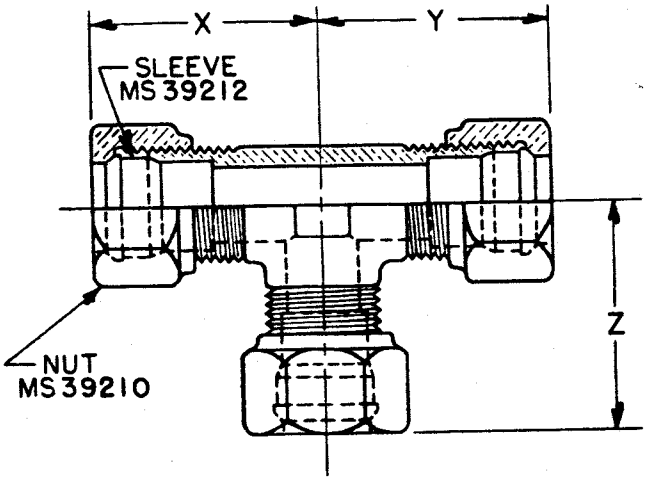

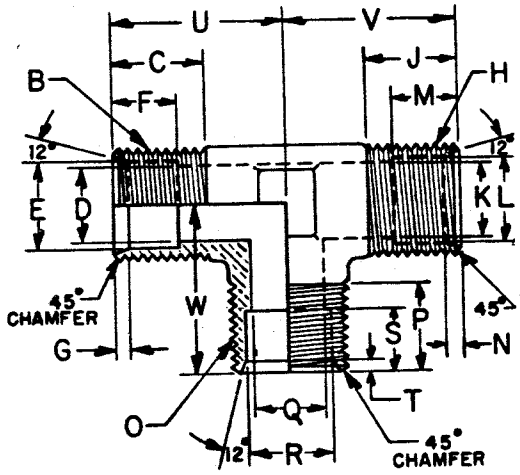

DETAIL OF BODY

DASH NO.	TUBE O.D.			B	C THREAD LENGTH	D	E	F	G	H	J	K	L	M	N
1	1/8	1/8	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8
2	3/16	3/16	3/16	3/8-24UNF-2A	9/32	1/8	.196 .200	1/4	5/32	3/8-24UNF-2A	9/32	1/8	.196 .200	1/4	5/32
3	1/4	1/4	1/4	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64
4	3/8	3/8	1/4	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
5	5/16	5/16	5/16	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64
6	3/8	5/16	5/16	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64
7	5/16	5/16	3/8	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64
8	3/8	3/8	3/8	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
9	7/16	3/8	3/8	11/16-16NS-2A	7/16	9/32	.450 .454	19/64	13/64	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64

DASH NO.	O	P	Q	R	S	T	U	V	W	X	Y	Z
1	5/16-24UNF-2A	9/32	3/32	.135 .139	13/64	1/8	21/32	21/32	21/32	31/32	31/32	31/32
2	3/8-24UNF-2A	9/32	1/8	.196 .200	1/4	5/32	21/32	21/32	21/32	1	1	1
3	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	3/4	3/4	3/4	1-5/32	1-5/32	1-5/32
4	1/2-20UNF-2A	13/32	13/64	.261 .265	19/64	13/64	15/16	15/16	15/16	1-3/8	1-3/8	1-11/32
5	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	13/16	13/16	13/16	1-3/16	1-3/16	1-3/16
6	9/16-18UNF-2A	13/32	13/64	.324 .328	19/64	13/64	15/16	15/16	15/16	1-3/8	1-5/16	1-5/16
7	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	15/16	15/16	15/16	1-5/16	1-5/16	1-3/8
8	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	15/16	15/16	15/16	1-3/8	1-3/8	1-3/8
9	5/8-18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	1 1/8	1 1/8	1 1/8	1-21/32	1-9/16	1-9/16

Ⓔ **INACTIVE** FOR NEW DESIGN. USE FOR MAINTENANCE PURPOSES ONLY. FOR NEW DESIGN USE MS51811.

APPROVED 24 APR 62 — REVISED Ⓐ 29 DEC 67 Ⓑ 10 OCT 74 Ⓒ 3 FEB 75 Ⓓ 13 MAY 77 Ⓔ 26 FEB 82

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. ARMY-AT Other Cust	TITLE TEES, TUBE - SAFETY SLEEVE COMPRESSION TYPE	MILITARY STANDARD MS39198 (AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-A211

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 4730

DASH NO.	TUBE O.D.			B	C THREAD LENGTH	D	E	F	G	H	J	K	L	M	N
10	1/2	3/8	3/8	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
11	1/2	1/2	3/8	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64
12	5/8	3/8	3/8	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
13	1 1/4	1 1/4	3/8	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64
14	3/8	3/8	1/2	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
15	1/2	3/8	1/2	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64
16	1/2	1/2	1/2	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64
17	1	1	1/2	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64
18	5/8	5/8	5/8	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64
19	3/4	3/4	3/4	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64
20	7/8	7/8	7/8	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64
21	1 1/2	7/8	7/8	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64
22	1 1/2	1 1/2	7/8	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64
23	1	1	1	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64

DASH NO.	O	P	Q	R	S	T	U	V	W	X	Y	Z
10	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	1 1/8	1 1/8	1 1/8	1 21/32	1 9/16	1 9/16
11	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	1 1/8	1 1/8	1 1/8	1 21/32	1 21/32	1 9/16
12	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	1 5/16	1 5/16	1 5/16	1 27/32	1 3/4	1 3/4
13	5/8 -18UNF-2A	7/16	9/32	.386 .390	19/64	13/64	2 1/4	2 1/4	2 1/4	2 7/8	2 7/8	2 9/16
14	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	1 1/8	1 1/8	1 1/8	1 9/16	1 9/16	1 21/32
15	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	1 1/8	1 1/8	1 1/8	1 21/32	1 9/16	1 21/32
16	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	1 1/8	1 1/8	1 1/8	1 21/32	1 21/32	1 21/32
17	3/4 -16UNF-2A	7/16	27/64	.514 .518	5/16	13/64	1 3/4	1 3/4	1 3/4	2 11/32	2 11/32	1 9/32
18	15/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64	1 5/16	1 5/16	1 5/16	1 27/32	1 27/32	1 27/32
19	1 1/16-16UN-2A	15/32	21/32	.766 .770	11/32	13/64	1 1/2	1 1/2	1 1/2	2 3/32	2 3/32	2 3/32
20	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	1 3/4	1 3/4	1 3/4	2 11/32	2 11/32	2 11/32
21	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	2 3/8	2 3/8	2 3/8	3 1/16	2 31/32	2 31/32
22	1 3/16-16UN-2A	15/32	23/32	.891 .895	11/32	13/64	2 3/8	2 3/8	2 3/8	3 1/16	3 1/16	2 31/32
23	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 3/4	1 3/4	1 3/4	2 11/32	2 11/32	2 11/32

APPROVED 24 APRIL 1962 REVISED

INACTIVE—SEE SHEET 1.

P.A.	TITLE	MILITARY STANDARD
Other Cust	TEES, TUBE - SAFETY SLEEVE COMPRESSION TYPE	MS39198(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:48Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 4730

DASH NO	TUBE O.D.			B	C THREAD LENGTH	D	E	F	G	H	J	K	L	M	N
24	1 1/4	1	1	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64
25	1	1	1 1/4	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64
26	1	1 1/4	1 1/4	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/64	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64
27	1 1/4	5/8	1 1/4	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	1 5/16-16UN-2A	15/32	1/2	.641 .645	11/32	15/64
28	1 1/4	1 1/4	1 1/4	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64
29	1 1/2	1 1/2	1 1/2	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64

	O	P	Q	R	S	T	U	V	W	X		Z
24	1 5/16-16UN-2A	15/32	7/8	1.016 1.020	13/32	13/32	2 1/4	2 1/4	2 1/4	2 7/8	2 27/32	2 27/32
25	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	2 1/4	2 1/4	2 1/4	2 27/32	2 27/32	2 7/8
26	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	2 1/4	2 1/4	2 1/4	2 27/32	2 7/8	2 7/8
27	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	2 1/4	2 1/4	2 1/4	2 7/8	2 25/32	2 7/8
28	1 5/8 -16UN-2A	35/64	1 3/32	1.270 1.274	13/32	13/64	2 1/4	2 1/4	2 1/4	2 7/8	2 7/8	2 7/8
29	1 7/8 -16UN-2A	9/16	1 11/32	1.520 1.524	15/32	13/64	2 3/8	2 3/8	2 3/8	3 1/16	3 1/16	3 1/16

MATERIAL: STEEL, IN ACCORDANCE WITH FEDERAL STANDARD NO. 66, AISI-C-1112, C-1113, C-1117, C-1118 OR C-1137.

FINISH: CADMIUM PLATED, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.

TOLERANCE: UNLESS OTHERWISE SPECIFIED, DECIMALS ± .005, FRACTIONS ± 1/64, DEGREES ± 2°.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH MIL-STD-H28/2.

DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

PART NUMBER: THE PART NUMBER CONSISTS OF MS NUMBER PLUS THE DASH NUMBER, EXAMPLE: MS 39198-1. THE PART NUMBER COVERS THE COMPLETE ITEM (WITH NUTS AND SLEEVES).

NOTES: 1. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

2. THIS ILLUSTRATION IS FOR IDENTIFICATION AND IS NOT INTENDED TO RESTRICT DESIGNS OR SHAPES NOT DIMENSIONED.

INACTIVE—SEE SHEET 1.

APPROVED 24 APRIL 1962 REVISED

P.A. Other Cust	TITLE: TEES, TUBE - SAFETY SLEEVE COMPRESSION TYPE	MILITARY STANDARD MS39198(AT)
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:48Z
Check the source to verify that this is the current version before use.