GGG-C-1507A
September 5, 1973
SUPERSEDING
Int. Fed. Spec. GGG-C-001507(GSA-FSS)
November 6, 1967, and
Fed. Spec. GGG-W-641d (In part)
March 18, 1963
(See 6.2)

FEDERAL SPECIFICATION

CROWFOOT ATTACHMENT, SOCKET WRENCH

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers socket wrench crowfoot attachments having a wrench component of the open end box type, and of the open end type. Each type is designed to receive the male drive end of a socket wrench handle.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types and classes. The crowfoot attachments covered by this specification shall be of the following types and classes, when applicable, as specified herein and in the invitation for bids, contract, or order (see 6.1).

Type I - Open end box.
  Class 1 - 1/4 inch drive.
  Class 2 - 3/8 inch drive.
  Class 3 - 1/2 inch drive.

Type II - Open end, 3/8 inch drive.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

FPP-P-40 - Packaging and Packing of Hand Tools.

Federal Standard:

Fed. Std. No. 346 - Gages, Wrench Opening.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply:

American Society for Testing and Materials (ASTM) Standard:

E18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Standard Methods of Test For.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

American National Standards Institute (ANSI), Inc., Standard:

B107.4 - Driving and Spindle Ends for Portable Hand, Air, and Electric Tools.

(plication for copies should be addressed to the American National Standards Institute, Inc., 14?? roadway, New York, NY 10018.)

(Technical Society and Technical Associati pecifications and standards are generally available reference from libr ies. They are also d tributed among technical groups and using Federal gencies.)

3. REQUIREMENTS

3.1 Illustration. The illustrations shown herein specify required design dimensions as noted.

3.2 Materials. The material used in the manufacture of the tools shall be such as to produce tools conformi to requirements specified hereinafter.

3.3 Marking. Each crowfoot attachment shall be marked in a permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readi determined, and with the nominal wrench opening (distance across flats) for the nut or bolt ad.

3.4 Manufacture and design.

3.4.1 Female drive end dimensions. The female drive end dimensions shall conform to ANSI B107.4. One or more faces of the female drive opening shall be drilled or recessed so that any recess or drilled hole shall engage the spring loaded steel ball or steel plunger on the corresponding male drive.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

3.4.2 Wrench openings. Wrench openings shall be gaged in accordance with Fed. Std. No. 346 prior to testing. After testing, the wrench openings shall be gaged as specified in 4.4.2.2.

3.5 Hardness. Crowfoot attachments shall be hardened to a Rockwell hardness of not less than 38 nor more than 54 on the "C" scale.

3.6 Test loads. When tested as specified in 4.4.2.1, tools shall withstand the test loads specified in the applicable tables without injury or permanent deformation (set) which might affect the durability or serviceability of the tools (see 4.4.2.2).

3.7 Finish.

3.7.1 Surface roughness. All external surfaces shall be free from pits, nodules, forge flash, burrs, cracks, and other detrimental defects. Maximum surface roughness shall be 125 microinches A.A. (Arithmetical Average) on all ground or buffed surfaces.

3.7.2 Coatings. Unless otherwise specified (see 6.1), the tools shall have a chromium plate as specified in 3.7.2.1. When chrome is restricted by Government order, the coating specified in 3.7.2.2, 3.7.2.3, or 3.7.2.4 will be acceptable. The coatings shall be adherent, smooth, continuous and free from pits, blisters, nodules, and any other defects which would interfere with their protective value and serviceability. The minimum thickness of the coating shall be as specified in 3.7.2.1 and 3.7.2.2 as applicable on all external visible surfaces which can be touched by a ball 0.750 inch in diameter.

3.7.2.1 Chromium plate. The coating shall be electrodeposited metals consisting of nickel, followed by chromium, the minimum thickness shall be 0.0002 inch for nickel and 0.00001 inch for chromium.

3.7.2.2 Zinc plate. The coating shall be electrodeposited zinc not less than 0.0003 inch thick, and shall be subjected to a chemical or electrochemical chromating.

3.7.2.3 Hot phosphating. The coating shall consist of a chemically produced phosphate followed with a coating of preservative oil.

3.7.2.4 Oxide coating. The coating shall consist of a chemically produced oxide, followed with a coating of preservative oil.

3.8 Type I, open end box, crowfoot attachments. Type I crowfoot attachments shall be of the open end box type, see figure 1. The crowfoot attachment shall have a female drive opening at one end and a slotted (open end) 12-point double hexagon socket at the other end.

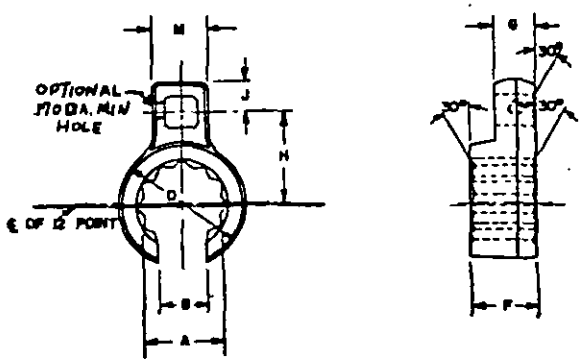


FIGURE 1. Type I, open end box crowfoot attachment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.8.1 Class 1, with 1/4 inch square drive. The type I, class 1 crowfoot attachments shall have a 1/4 inch female square drive opening and shall conform to table I for the size specified (see 6.1).

TABLE I. Type I, class 1, open end box crowfoot attachment with 1/4 inch square drive opening

Wrench opening (distance across flats) A	Dimensions								Torque load Min.
	B		D	F	G	H	J	M	
	Min.	Max.	Max.	+0.062 -0.000	Max.	Max.	Max.	Max.	
Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch-Pounds
3/16	0.112	0.156	0.405	0.250	0.250	0.486	0.257	0.515	50
7/32	.130	.188	.405	.250	.250	.486	.257	.515	50
1/4	.153	.219	.499	.250	.250	.486	.257	.515	60
9/32	.174	.250	.499	.250	.250	.486	.257	.515	60
5/16	.198	.281	.535	.282	.282	.486	.257	.515	75
11/32	.215	.313	.535	.282	.282	.486	.257	.515	75
3/8	.236	.312	.624	.469	.312	.531	.257	.515	75
7/16	.278	.375	.718	.531	.312	.578	.257	.515	200
1/2	.320	.406	.811	.531	.312	.625	.257	.515	200
9/16	.363	.469	.874	.531	.312	.656	.257	.515	225

3.8.2 Class 2, with 3/8 inch square drive. The type I, class 2 crowfoot attachments shall have a 3/8 inch female square drive opening and shall conform to table II for the size specified (see 6.1).

TABLE II. Type I, class 2, open end box crowfoot attachment with 3/8 inch square drive opening

Wrench opening (distance across flats) A	Dimensions								Torque load Min.
	B		D	F	G	H	J	M	
	Min.	Max.	Max.	+0.062 -0.000	Max.	Max.	Max.	Max.	
Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch-Pounds
5/8	.408	0.500	0.983	0.688	0.406	0.750	0.328	0.656	250
11/16	.450	.562	1.076	.688	.406	.797	.328	.656	310
3/4	.482	.593	1.170	.719	.406	.844	.328	.656	450
13/16	.536	.656	1.248	.719	.406	.891	.328	.656	450
7/8	.578	.719	1.342	.750	.406	.985	.328	.656	625
15/16	.620	.750	1.420	.750	.406	.954	.328	.656	625
1	.660	.781	1.498	.781	.406	1.032	.328	.656	625
1-1/16	.706	.812	1.576	.781	.406	1.063	.328	.656	625

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.8.3 Class 3, with 1/2 inch square drive. The type I, class 3 crowfoot attachments shall have a 1/2 inch female square drive opening and shall conform to table III for the size specified (see 6.1).

TABLE III. Type I, class 3, open end box crowfoot attachment with 1/2 inch square drive opening

Wrench opening (distance across flats) A	Dimensions								Torque load Min.
	B		D	F +0.062 -0.000	G	H	J	M	
	Min.	Max.	Max.		Max.	Max.	Max.	Max.	
Inches	Inches	Inches	Inches	Inches	Inch	Inches	Inch	Inch	Inch-pounds
1-1/8	0.748	0.875	1.685	0.875	0.531	1.172	0.438	0.875	825
1-1/4	.832	.969	1.841	.875	.531	1.251	.438	.875	825
1-5/16	.874	1.000	1.904	.875	.531	1.282	.438	.875	900
1-3/8	.916	1.093	1.998	.938	.531	1.329	.438	.875	900
1-7/16	.958	1.093	2.060	.938	.531	1.360	.438	.875	900
1-1/2	1.000	1.156	2.122	.938	.531	1.391	.438	.875	900
1-5/8	1.088	1.250	2.279	.938	.531	1.469	.438	.875	1,100
1-11/16	1.130	1.343	2.372	1.000	.531	1.531	.438	.875	1,100
1-3/4	1.130	1.343	2.435	1.000	.531	1.562	.438	.875	1,150
1-13/16	1.216	1.375	2.529	1.000	.531	1.609	.438	.875	1,200
1-7/8	1.258	1.406	2.622	1.062	.531	1.656	.438	.875	1,200
2	1.340	1.593	2.779	1.062	.531	1.734	.453	.906	1,400
2-1/16	1.386	1.593	2.841	1.125	.531	1.766	.453	.906	1,450
2-3/16	1.468	1.656	2.998	1.125	.531	1.844	.453	.906	1,500
2-1/4	1.512	1.719	3.091	1.125	.531	1.890	.453	.906	1,500
2-3/8	1.596	1.843	3.248	1.188	.531	1.969	.469	.938	1,600
2-7/16	1.638	1.843	3.310	1.188	.531	2.000	.469	.938	1,650
2-1/2	1.680	1.906	3.604	1.188	.531	2.047	.469	.938	1,700
2-9/16	1.722	1.906	3.493	1.250	.531	2.110	.469	.938	1,750
2-5/8	1.768	2.093	3.560	1.250	.531	2.141	.469	.938	1,800
2-3/4	1.852	2.093	3.716	1.250	.531	2.219	.484	.969	1,850
2-13/16	1.896	2.125	3.779	1.312	.531	2.250	.484	.969	1,900
2-15/16	1.980	2.187	3.935	1.312	.531	2.328	.484	.969	1,950
3-1/8	2.108	2.343	4.185	1.312	.531	2.453	.484	.969	2,000

3.9 Type II, open end crowfoot attachments. Type II crowfoot attachments shall have an open end wrench at one end and two 3/8 inch square female drive openings at the opposite end. One female drive socket shall be parallel to, and the other at right angles to the longitudinal axis within $\pm 3^{\circ}$. Type II attachments shall be similar to figure 2 and shall conform to table IV.

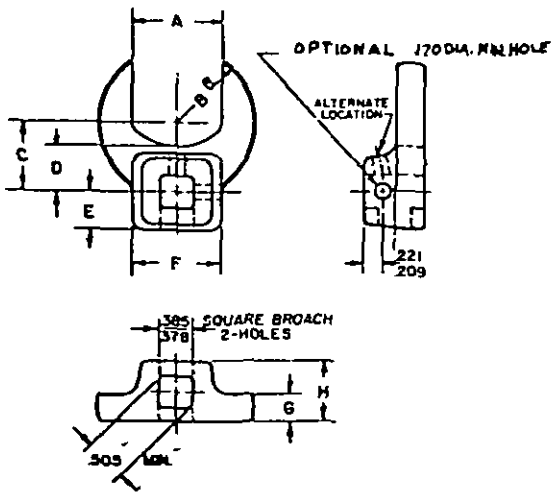


FIGURE 2. Type II open end crowfoot attachment, 3/8 inch square drive.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE IV. Type II, open end crowfoot attachment with 3/8 inch drive

A Size	B radius (Max.)	C ±1/16	D Max.	E Max.	F Max.	G Max.	H Max.	Torque load Min.
Inches	Inches	Inches	Inch	Inch	Inches	Inch	Inch	Inch-pounds
7/16	7/16	1/2	29/64	3/8	3/4	1/4	21/32	75
1/2	1/2	9/16	7/16	3/8	3/4	1/4	21/32	145
9/16	1/2	9/16	15/32	3/8	3/4	1/4	21/32	105
5/8	19/32	5/8	29/64	3/8	3/4	1/4	21/32	1?0
11/16	19/32	5/8	17/32	3/8	1	1/4	21/32	!40
3/4	3/4	21/32	17/32	7/16	1	1/4	23/32	360
13/16	3/4	21/32	17/32	7/16	1	1/4	23/32	290
7/8	13/16	23/32	17/32	7/16	1	1/4	23/32	360
15/16	13/16	23/32	17/32	7/16	1	1/4	23/32	290
1	29/32	25/32	17/32	7/16	1	3/8	23/32	420
1-1/16	29/32	13/16	17/32	7/16	1	3/8	23/32	460
1-1/8	1	27/32	17/32	7/16	1	3/8	23/32	600
1-1/4	1-3/32	29/32	17/32	7/16	1	3/8	23/32	680
1-5/16	1-3/32	29/32	17/32	7/16	1	3/8	23/32	600
1-3/8	1-7/32	31/32	17/32	7/16	1	3/8	23/32	860
1-7/16	1-7/32	31/32	17/32	7/16	1	3/8	23/32	760
1-1/2	1-5/16	1-1/32	9/16	7/16	1	3/8	23/32	1,120
1-5/8	1-3/8	1-3/32	9/16	7/16	1-1/8	3/8	23/32	960
1-11/16	1-3/8	1-3/32	9/16	7/16	1-1/8	3/8	23/32	860
1-3/4	1-15/32	1-1/16	9/16	7/16	1-1/8	3/8	23/32	1,053
1-13/16	1-15/32	1-3/32	9/16	7/16	1-1/8	3/8	23/32	960
1-7/8	1-5/8	1-1/8	9/16	7/16	1-1/8	3/8	23/32	1,410
2	1-3/4	1-3/16	9/16	1/2	1-1/8	1/2	13/16	1,630
2-1/16	1-3/4	1-3/16	9/16	1/2	1-1/8	1/2	13/16	2,100
2-3/16	1-27/32	1-9/32	5/8	1/2	1-1/8	1/2	13/16	2,200
2-1/4	1-31/32	1-13/32	21/32	1/2	1-1/8	1/2	13/16	2,2?0
2-3/8	2-3/32	1-17/32	3/4	1/2	1-1/8	1/2	13/16	2,?00
2-7/16	2-3/32	1-17/32	27/	1/2	1-1/8	1/2	13/16	2,200
2-9/16	2-3/	1-19/32	27/	1/2	1-1/8	1/2	13/16	2,200
2-5/8	2-	1-11/16	29/3	9/16	1-1/8	1/2	13/16	2,200
2-3/4	2 /32	1-23/32	2 /32	5/8	1-1/4	1/2	13/16	2,200
2-13/16	2 /32	1-23/32	/32	5/8	1-1/4	1/2	13/16	2,200
2-15/16	2 /32	1-27/32	31/32	5/8	1-1/4	1/2	13/16	2,200
3	-19/32	1-27/3	31/32	5/8	1-1/4	1/2	13/16	2,200

3. Workmanship. Wrenches shall conform to the quality and grade of product described by the requirements in this specification. Tools shall be free from rust and defects which may affect their serviceability, durability, or appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table V.

TABLE V. Sampling data

Category	Sample unit	Inspection level	Acceptable quality level (AQL)	AQL expressed in terms of	Reference
Visual examination	One each	II	1.5	Percent defective	4.3.1
Dimensional examination	One each	II	1.5	Percent defective	4.3.2
Testing	One each	S-4	1.5	Percent defective	4.4
Preparation for delivery examination	One container	S-2	4.0	Defects per hundred units	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking. Defects are listed in table VI.

TABLE VI. Defects list

Examine	Defect
Design	Type, class, size, and drive size not as specified.
Finish	Not as specified.
Coating	Not as specified.
Construction	Not as specified.
Workmanship	Not as specified.
Marking	Not as specified.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements. Wrench openings shall be gaged in accordance with Fed. Std. No. 346.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1, 4.4.2, and 4.4.3.

4.4.1 Hardness test. A hardness test shall be conducted in accordance with ASTM E18 to determine compliance with 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

4.4.2 Load test. Load tests shall be conducted on the sample crowfoot attachments to determine conformance with the applicable torque load requirements specified in section 3.

4.4.2.1 Application of torque load. The nut engagement end of the wrench shall be inserted fully onto a hexagon mandrel secured to a testing machine. Force shall be applied to a drive handle inserted into the square drive of the wrench. The specified torque load shall be the load applied to the mandrel. The drive handle shall be inserted into the blind opening of the type II wrench. The mandrel shall be hardened to a Rockwell "C" 55 minimum, be of sufficient length to fully engage the wrench, and conform to the dimensions and tolerances of table VII.

TABLE VII. Hexagon mandrel dimensions and maximum depth of mandrel insertion (inches)

Nominal size of wrench opening	Hexagon mandrel dimensions		Maximum depth of mandrel insertion
	Across flats tolerances	Across corners minimum	
5/32	+.001 -.002	0.1745	0.094
3/16	+.001 -.002	.2105	.094
7/32	+.001 -.002	.2460	.109
1/4	+.001 -.002	.2815	.125
9/32	+.001 -.002	.3175	.141
5/16	+.001 -.002	.3531	.141
11/32	+.001 -.002	.3860	.156
3/8	+.001 -.002	.4238	.156
7/16	+.001 -.002	.4944	.218
1/2	+.001 -.003	.5650	.265
17/32	+.001 -.003	.6012	.328
9/16	+.001 -.003	.6356	.328
19/32	+.001 -.003	.6697	.328
5/8	+.001 -.003	.7020	.375
11/16	+.001 -.003	.7769	.375
3/4	+.001 -.003	.8512	.437
25/32	+.001 -.003	.8843	.453
13/16	+.001 -.003	.9201	.453
7/8	+.001 -.003	.9931	.500
15/16	+.001 -.003	1.0631	.546
1	+.001 -.003	1.1350	.546
1-1/16	+.001 -.003	1.2013	.625
1-1/8	+.001 -.003	1.2723	.656
1-3/16	+.001 -.003	1.3443	.656
1-1/4	+.001 -.003	1.4160	.750
1-5/16	+.001 -.003	1.4370	.765
1-3/8	+.001 -.003	1.5590	.781
1-7/16	+.001 -.003	1.6310	.875
1-1/2	+.001 -.003	1.7020	.875
1-9/16	+.001 -.007	1.7700	.875.
1-5/8	+.001 -.007	1.8410	1.000
1-11/16	+.001 -.007	1.9120	1.000
1-3/4	+.001 -.007	1.9830	1.093
1-13/16	+.001 -.007	2.0540	1.125
1-7/8	+.001 -.007	2.1240	1.125
1-15/16	+.001 -.007	2.1950	1.125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE VII. Hexagon mandrel dimensions and maximum depth of mandrel insertion (inches) (con.)

Nominal size of wrench opening	Hexagon mandrel dimensions		Maximum depth of mandrel insertion
	Across flats tolerances	Across corners minimum	
2	+.001 -.007	2.2660	1.218
2-1/16	+.001 -.007	2.3370	1.218
2-1/8	+.001 -.007	2.4080	1.218
2-3/16	+.001 -.007	2.4790	1.375
2-1/4	+.001 -.007	2.5490	1.375
2-5/16	+.001 -.007	2.6210	1.375
2-3/8	+.001 -.007	2.6910	1.375
2-7/16	+.001 -.007	2.7620	1.375
2-1/2	+.001 -.007	2.8330	1.375
2-9/16	+.001 -.008	2.9030	1.375
2-5/8	+.001 -.008	2.9740	1.500
2-3/4	+.001 -.008	3.1160	1.750
2-13/16	+.001 -.008	3.1870	1.750
2-15/16	+.001 -.008	3.3280	1.750
3	+.001 -.008	3.3990	2.000
3-1/8	+.001 -.008	3.5410	2.000
3-1/4	+.001 -.010	3.6820	2.000
3-3/8	+.001 -.010	3.8240	2.000
3-1/2	+.001 -.010	3.9660	2.200
3-3/4	+.001 -.010	4.2490	2.200
3-7/8	+.001 -.010	4.3910	2.500
4	+.001 -.010	4.5320	2.500
4-1/8	+.001 -.010	4.6740	2.500
4-1/4	+.001 -.010	4.8160	2.500
4-1/2	+.001 -.010	5.0990	2.500
4-5/8	+.001 -.012	5.2400	3.000
4-7/8	+.001 -.012	5.5240	3.000
5	+.001 -.012	5.6650	3.250

4.4.2.2 Examination for deformation and permanent set. After application of the test load the crowfoot attachment shall be examined for deformation and permanent set. The maximum allowable wrench opening after application of the test load on crowfoot attachments shall not exceed the "C" dimension of Fed. Std. No. 346 for the applicable nominal size by more than 0.003 inch.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking complies with the requirements in section 5 of this specification. Defects shall be scored in accordance with table V. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

5. PREPARATION FOR DELIVERY

5.1 Cleaning, preservation, packaging, and packing. Crowfoot attachments shall be cleaned, preserved, packaged, and packed in accordance with PPP-P-40. The level of packaging shall be A, B, or C, the level of packing shall be A, B, or C, and the marking shall be civil or military as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the currentversion before use.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class when applicable, and size of wrench required (see 1.2.1).
(c) Type of coating required (see 3.7.2).
(d) Selection of applicable marking requirements (see 5.1).

6.2 Superseding data. This specification supersedes Federal Specification GGG-W-641d in part as follows:

GGG-W-641d	This specification
Type IV. Attachments	GGG-C-1507
Class 1. Crowfoot	Crowfoot attachments
Style A. Modified box	Type I. Open end, box
Style B. Open end, thin	Type II. Open end

MILITARY CUSTODIANS:

DOD has waived coordination on revisions and amendments to this Federal Specification until further notice.

Preparing activity:

GSA-FSS

☆U. S. GOVERNMENT PRINTING OFFICE : 1973 O - 544-604/1416

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.