GGG-C-1520
November 6, 1969
SUPERSEDING
MIL-C-729C
9 February 1965 and
MIL-P-4520(USAF)
22 July 1952
(See section 6)

FEDERAL SPECIFICATION

CARRIER, TOOL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for both leather and cotton duck small tool carriers which can be attached to a workman's belt.

1.2 Classification. The tool carriers shall be of the following types and styles as specified (see 6.2):

Type I - Leather.

Style 1 - One pocket (see figure 1).
Style 2 - Two pocket (see figure 2).
Style 3 - Two pocket (see figure 3).
Style 4 - Three pocket (see figure 4).
Style 5 - Five pocket (see figure 5).
Style 6 - Five pocket (see figure 6).

Type II - Cotton duck

Style 1 - One pocket (see figure 7).
Style 2 - Seven pocket (see figure 8).
Style 3 - Seven pocket (see figures 9 and 10).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Federal Specifications:

V-T-285	-	Thread, Polyester.
KK-L-271	-	Leather, Cattlehide, Strap, Vegetable-Tanned.
QQ-B-626	-	Brass, Leaded and Nonleaded: Rod, Shapes, Forgings, and Flat Products with Finished Edges (Bar and Strip).
QQ-W-321	-	Wire, Copper Alloy.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied Yarns, Army and Numbered.
CCC-D-950	-	Dyeing and Aftertreating Processes for Cotton Cloths.
PPP-B-636	-	Box, Fiberboard.
PPP-F-320	-	Fiberboard; Corrugated and Solid Sheet Stock (Container Grade), and Cut Shapes.

Federal Standards:

FED-STD-751	-	Stitches, Seams and Stitchings.
FED-STD-123	-	Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Auburn, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-W-530	-	Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-H-639	-	Hooks (for Belts, Straps, and Equipage Items).
MIL-S-2578	-	Snaphooks, Fixed Loops, 3/8, 1/2, 5/8, 3/4, 1 and 1-1/2 inch.
MIL-R-2583	-	Rivets, Solid, Belt and Washers, Flat (Burrs).
MIL-R-3390	-	Rings, Dee.
MIL-F-10884	-	Fasteners, Snap.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

MIL-E-20652 - Eyelets, Metallic, with Washers.
MIL-W-43061 - Wax, Hand Stitching and Machine Stitching.
MIL-C-43256 - Cord, Polyester, Solid Braid.
MIL-T-43566 - Tape, Textile, Cotton, General Purpose, Natural or in Colors.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads; 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base.

DRAWINGS

ARMY NATICK LABORATORIES

2-3-314 - Carrier, Tool; Type I, Style 1
2-3-315 - Type I, Style 2
2-3-316 - Type I, Style 3
2-3-317 - Type I, Style 4
2-3-318 - Type I, Style 5
2-3-319 - Type I, Style 6
2-3-320 - Carrier, Tool; Type II, Style 1
2-3-321 - Type II, Style 2
2-3-339 - Type II, Style 3
2-3-340 - Type II, Style 3

(Figures 1 through 10 are miniature reproductions of referenced drawings and are attached for information only.)

(Copies of Military specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to the National Classification Board, 1616 P Street, N.W., Washington, D.C. 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), before production is commenced, a sample tool carrier covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of the responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials and components. Materials and components shall be as referenced on applicable drawings listed in section 2 and as specified herein.

3.3 Construction. The construction of each type and style carrier shall conform to the applicable drawing listed in section 2 and as specified herein.

3.3.1 Stitching, machine. All stitching shall conform to type 301 of FED-STD-751, 5 to 7 stitches per inch on leather carriers and 6 to 8 stitches per inch on cotton duck carriers. Stitching on leather carriers shall be performed with the use of a hot wax. The wax shall conform to type II of MIL-W-43061.

3.3.1.1 Thread breaks. Thread breaks in stitching shall be overstitched not less than 1 inch at each break.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.3.1.2 Stitching ends. Ends of stitching shall be overstitched not less than 1 inch, except where ends are turned under in a hem or held down by other stitching. Any automatic stitching shall have the ends of stitching secured with at least three or more tying, overlapping or backstitches.

3.3.1.3 Skipped stitches. Two or more consecutively skipped stitches shall be overstitched not less than 1 inch.

3.3.1.4 Setting of rivets. All rivets shall be securely set and neatly headed.

3.3.1.5 Setting of snap fasteners. Holes punched before inserting the male or female part of a snap fastener shall be smaller than the outside diameter of the fastener tube so that the tube must be forced through the hole. Fasteners shall be securely clinched.

3.4 Marking for identification. Each tool carrier shall be permanently and legibly marked with the manufacturer's name or readily identifiable trademark.

3.5 Workmanship. Leather components shall be clean and free of holes, brand marks or deep scratches, and leather edges shall be scored as required. Cloth components shall be clean and free of holes, cuts, tears or cloth defects such as multiple floats or broken or missing yarns. Tape and webbing shall not have frayed or scalloped edges. Thread tension shall be maintained so that there will be no loose or tight stitching, and seam allowances shall be maintained so that no runoffs, twists, pleats or open seams shall result. Care shall be taken in sewing to see that no needle chews occur. All thread ends shall be trimmed to 1/2 inch or less.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for defects listed in table I and dimensions specified.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Components and materials. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.3.2 Process examination. Examination shall be made to determine that holes punched to receive snap fasteners are in compliance with 3.3.1.5. Whenever noncompliance is noted, correction shall be made to the items affected and to the process.

4.3.3 End product inspection. The lot shall consist of all completely fabricated tool carriers of one type and style offered for inspection at one time. The sample unit shall be one completely fabricated tool carrier. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.3.3.3.

4.3.3.1 Visual examination. Completely fabricated leather or cotton duck tool carriers shall be examined for defects in table I.

TABLE I. Classification of defects for visual characteristics

Examine	Defect	Classification		
		Major	Minor	
			A	B
Material	–			
Leather	Any hole, cut or tear	X		
Fabric	Any hole, cut or tear	X		
	Broken or missing yarn, multiple floats clearly visible at normal inspection distance (approximately 3 feet)		X	
Webbing	Frayed or scalloped edge	X		
	Belt hanger spliced (i.e., not one continuous piece)	X		

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Hardware General	Broken	X		
	Malformed:			
	-fails to perform intended function	X		
	-will perform intended function		X	
	Corroded area			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
Seams and stitching	Open:			
	-for not more than 1/2 inch			X
	-for more than 1/2 inch but not more than 1 inch		X	
	-for more than 1 inch	X		
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken			
	Thread breaks overstitched less than 1 inch		X	
	NOTE: Thread breaks not overstitched shall be classified as open seams			
	Skipped stitches overstitched less than 1 inch (when two or more skipped stitches occur consecutively)			X
	NOTE: Skipped stitches not overstitched shall be classified as open seams			
	Needle chews resulting in hole, cut, or tear	X		
Stitching ends	Overstitched less than 1 inch (except where ends are held down by other stitching, turned under in a hem or where stitching is performed automatically)		X	
	Secured with less than three tying, overlapping or backstitches when automatic stitching is performed			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)				
Seam type	Wrong seam type	X		
Stitch type	Wrong stitch type	X		
Stitch tension	Loose, resulting in a loosely exposed top thread for more than 2 inches		X	
	Tight, as evidenced by puckering of fabric (or rupture of leather) for more than 2 inches		X	
Stitches per inch	Less than minimum specified:			
	-one stitch			X
	-two or more stitches		X	
	More than maximum specified:			
	-one stitch			X
	-two or more stitches		X	
	NOTE: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or heavy seams, or in turning corners, shall be classified as follows:			
	(a) Within the minor "A" defect classification - minor "B" defect			
	(b) Within the minor "B" defect classification - no defect			
Stitching margin	Larger than specified by more than 3/16 inch:			
	-for more than 1 inch but not more than 2 inches			X
	-for more than 2 inches		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Components and assembly	Any component part not fabricated of applicable referenced material	X		
Construction details				
Top edge	Top edge of back folded on inside of carrier		X	
Binding	Loosely applied			X
	Badly pleated			X
	Ends finished less than 5/8 inch from top edge, or folded over front of carrier			X
Hanger	Misplaced		X	
Double hook	Reversed	X		
Snap fastener	Clinched excessively tight, cutting material; or not clinched securely	X		
	Fails to effect a secure closure; or fails to open freely	X		
Snap link	Incorrectly attached, i.e., reversed		X	
Rivet	Not securely clinched		X	
Edges of leather	Not scored where specified			X
Marking	Omitted, not legible		X	
Cleanness	Grease or oil stains clearly visible			X
	Thread ends not trimmed to 1/2 inch or less			X

4.3.3.2 Dimensional examination. Any dimension that is not within specified tolerances shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

4.3.3.3 Inspection levels and AQL's. The inspection levels and AQL's, expressed in terms of defects per hundred units, shall be as follows:

Examination	Inspection levels	AQL's
For defects applicable to table I	II	2.5 Major 10.0 Major and minor A 25.0 Total (Major, minor A and B defects combined)
For defects applicable to 4.3.3.2	S-3	6.5 One class

4.3.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE II. Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged.
Workmanship	Bulging or distortion of containers.
Content	Number per container is more or less than specified.

4.3.5 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing and reinforcing shall be in accordance with that specification.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the currentversion before use.

4.3.6 Examination for palletization. When palletization is required, an examination shall be made to determine that palletization requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table III. The sample unit shall be one palletized unit load fully prepared for delivery. The lot shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

TABLE III. Examination of palletization

Examination	Defect
Finished dimensions	Length, width, or height exceeding specified maximum requirements.
Palletization	Not as specified Container pattern not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Five carriers, of one type and style only, with fasteners secured (where applicable), shall be neatly stacked in a bundle; they may be alternated top-to-bottom and reversed in a manner to achieve an even bundle. The manufacturer's identification shall be visible at the ends of each bundle. Each bundle shall be securely cross-tied with cotton tape or twine.

5.1.2 Level C. Carriers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Carriers, of one type and style only, packaged as specified in 5.1, shall be packed in a close-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Level A packages shall be packed flat or on their sides (where applicable) reversed end-to-end to achieve an even, balanced pack within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight draft paper conforming to grade B of UU-P-268. Each shipping container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the box specification. Net weight of the contents of each shipping container shall not exceed 65 pounds.

5.2.2 Level B. Carriers, of one type and style only, packaged as specified in 5.1, shall be packed in a close-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-F-320. Level A packages shall be packed flat or on their sides (when applicable), reversed end-to-end to achieve an even, balanced pack within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the box specification. Net weight of the contents of each shipping container shall not exceed 65 pounds.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C. Tool carriers shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the currentversion before use.

5.3 Palletization. Unless otherwise specified (see 6.2), tool carriers, packed as specified, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, any pallet pattern may be used, provided approval is obtained from the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages, shipping containers and palletized unit loads shall be marked in accordance with FED-STD-123 or MIL-STD-129, as applicable.

6. NOTES

6.1 Intended use. The tool carriers covered by this specification are designed to contain small tools such as those commonly used by electricians, linemen and the like. The carriers are provided with slits, loops or hooks for attachment to the workman's belt.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in the procurement documents.

(a) Title, number and date of this specification.
(b) Type and style carrier required (see 1.2).
(c) First article. When preproduction sample is required (see 3.1).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(f) When palletization is not required (see 5.3).
(g) Quantity to a shipping container (see 6.2.1).

6.2.1 For civil agency procurements, where level B packing is specified in the contract or order, the requirements in 5.1.1 (level A) shall apply. For level B packing quantities (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

6.3 Supersession data. This specification includes the requirements of MIL-C-729C, dated 9 February 1965, as type II, style 1; and of MIL-P-4520 (USAF), dated 22 July 1952, as type II, style 3. This specification also covers the requirements of the following drawings in the types and styles as indicated:

Drawing	Type	Style
Signal Corps Drawing 758-G	I	2
Corps of Engineers Drawing B-4657	I	3
GSA Drawing 5140-895-2113	I	4
GSA Drawing 5140-529-1889	I	6
Ordinance Corps Drawing 9205778	II	2

MILITARY CUSTODIANS:

Army - GL
Navy - YD
Air Force - 84

Review activities:

Navy - YD
Air Force - 84

User activities:

Army - EL, MI, ME, AV, WC, CE
Navy - AS, MC

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

GSA-FSS
HEW
JUS
PO
VA

Project No. 5140-0053

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.



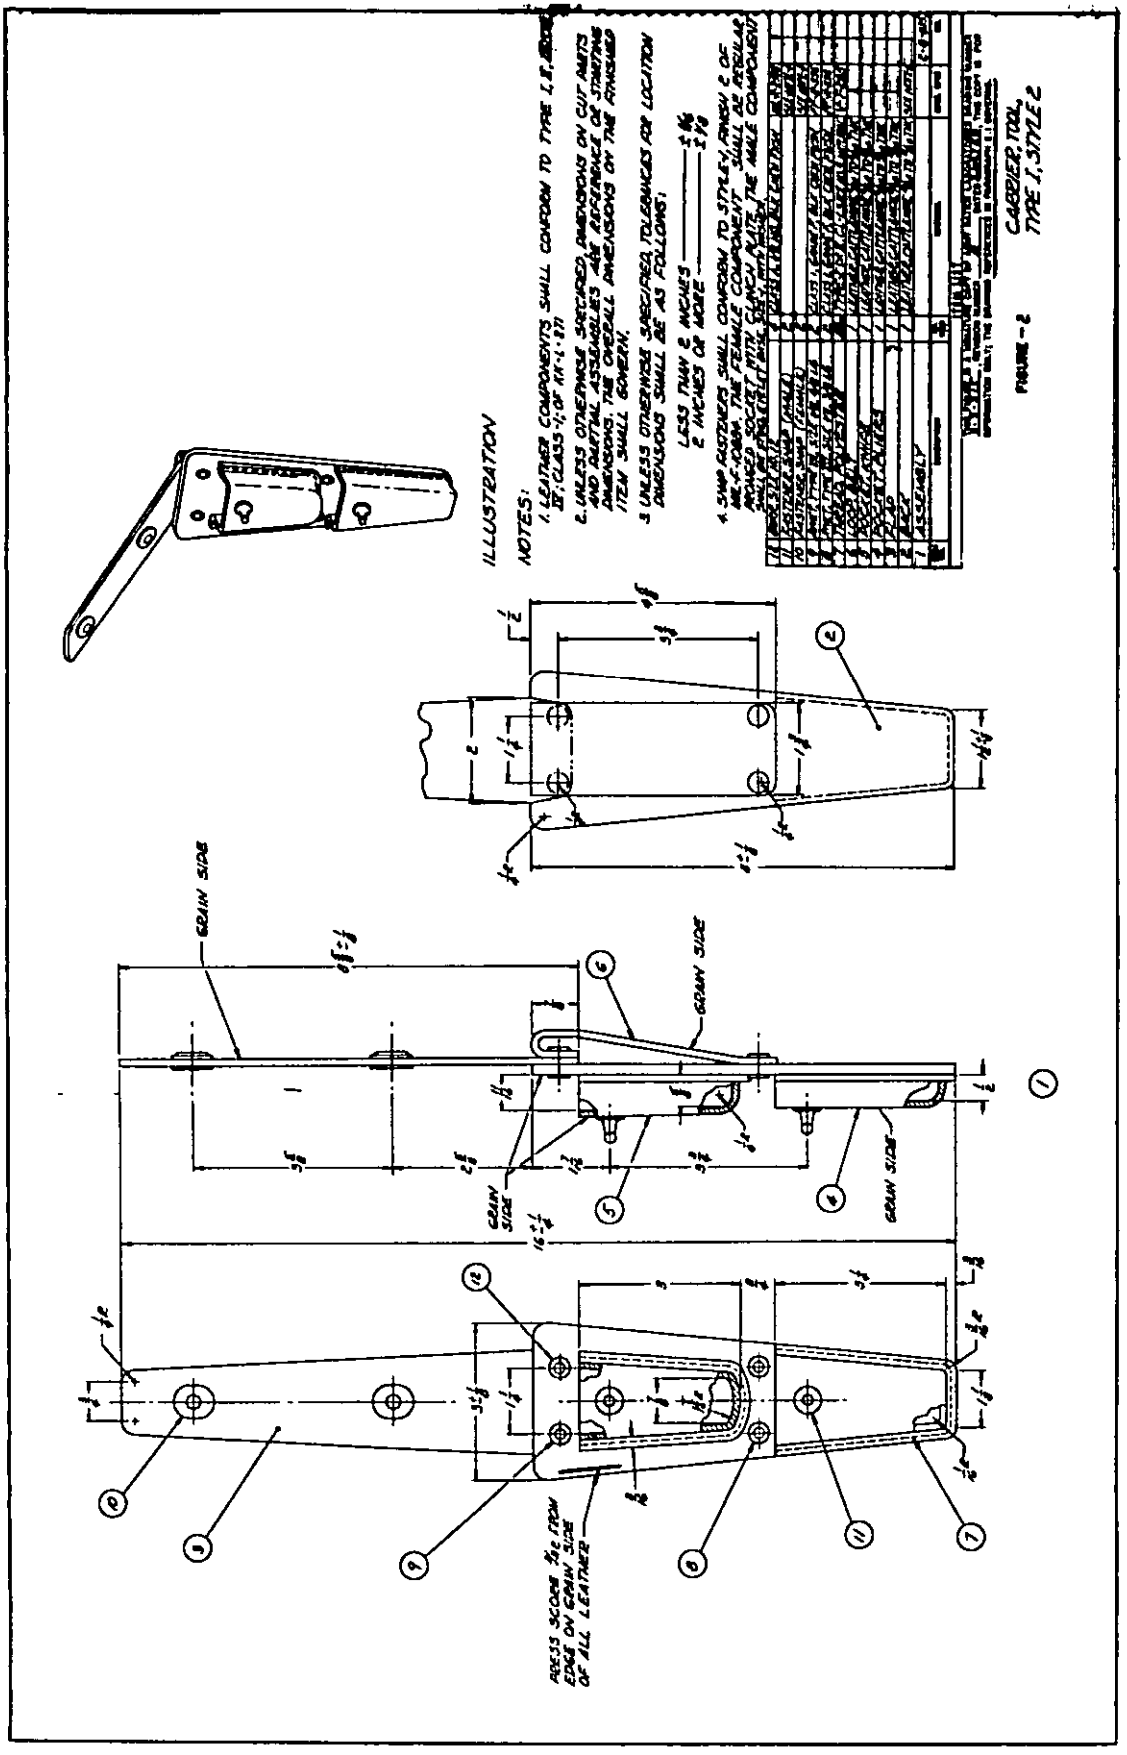


FIGURE - 2


Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

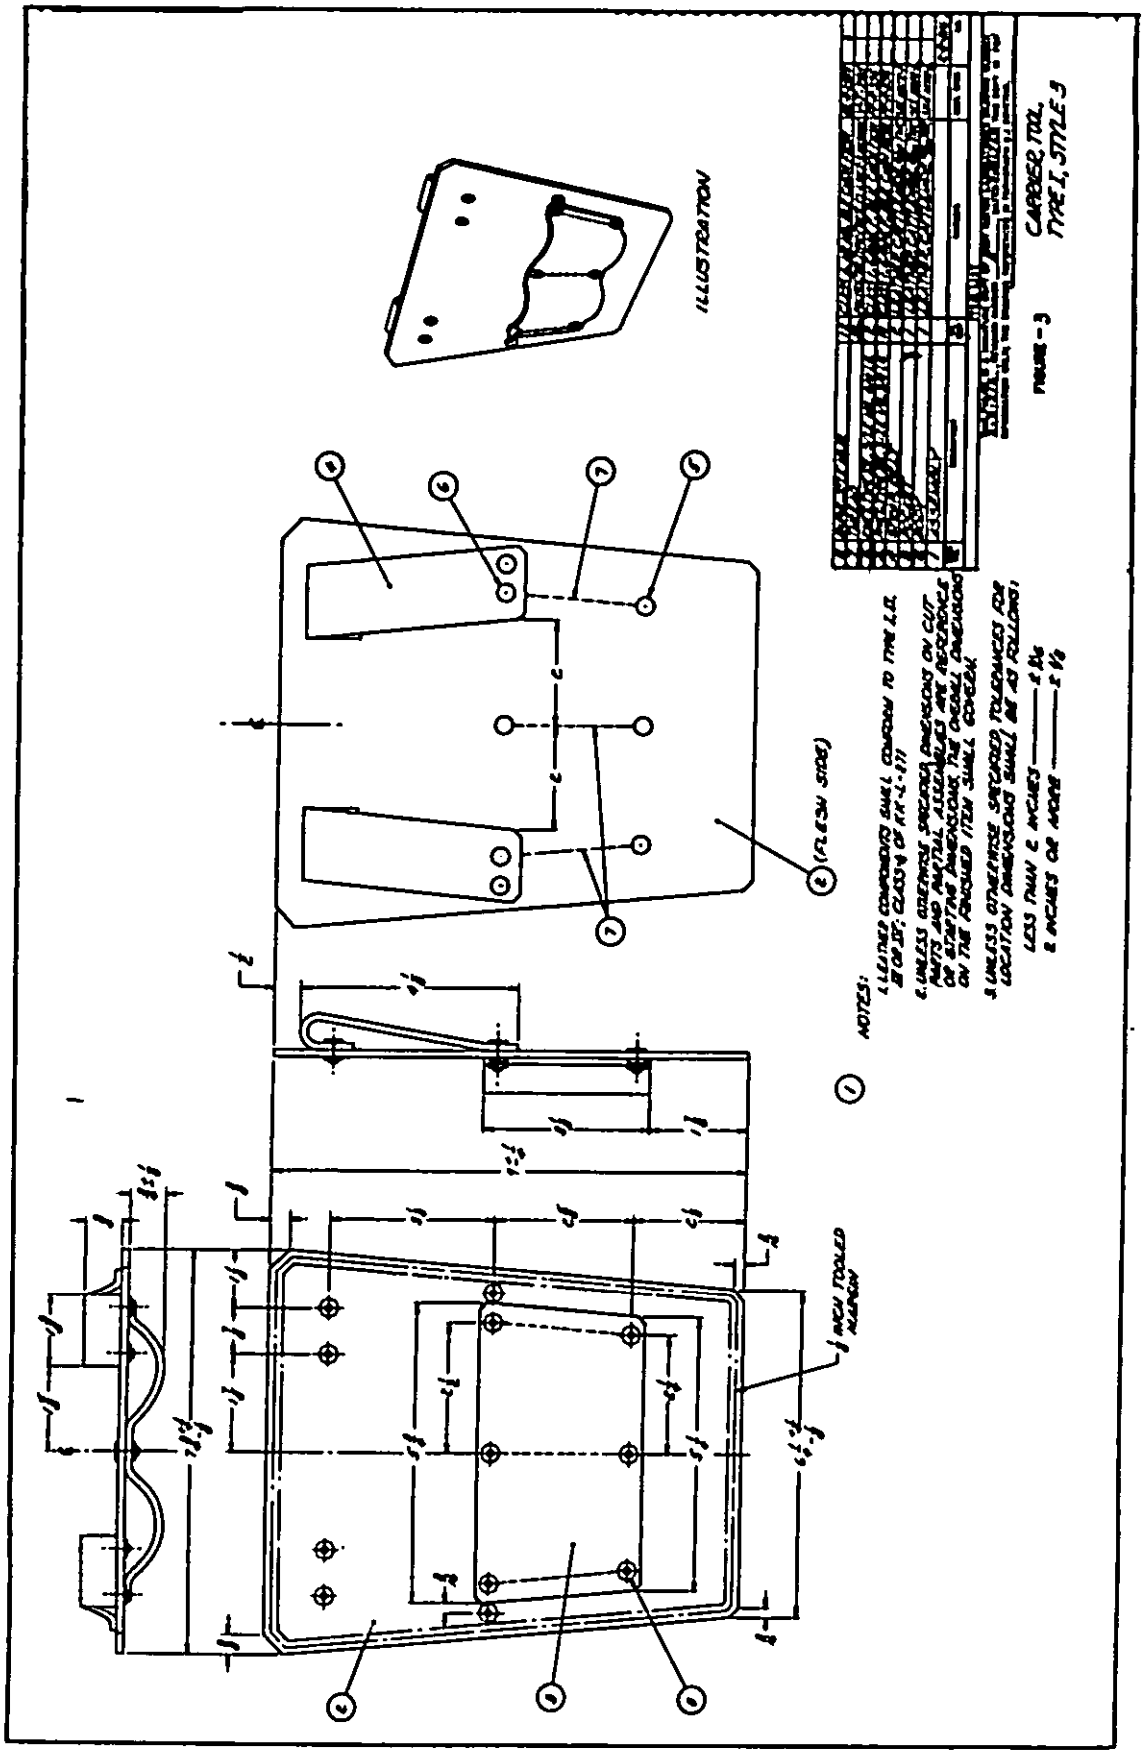


Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

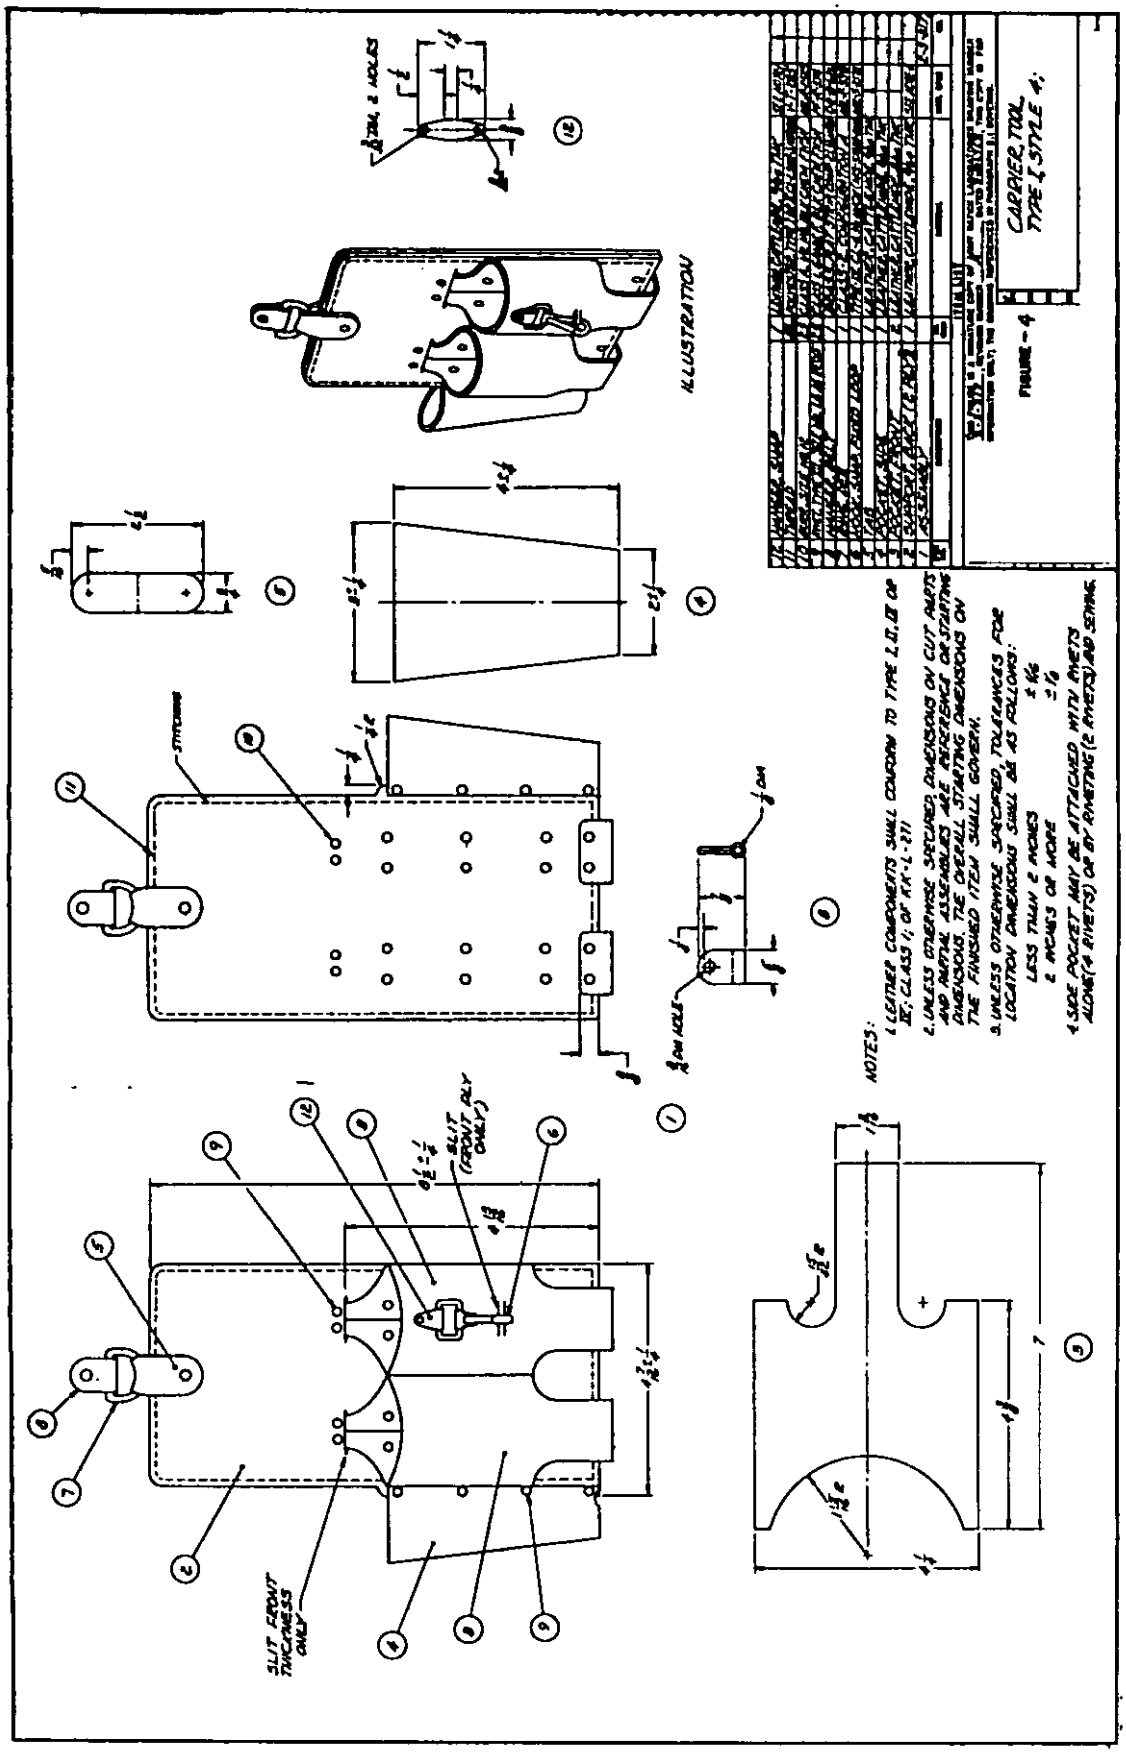

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

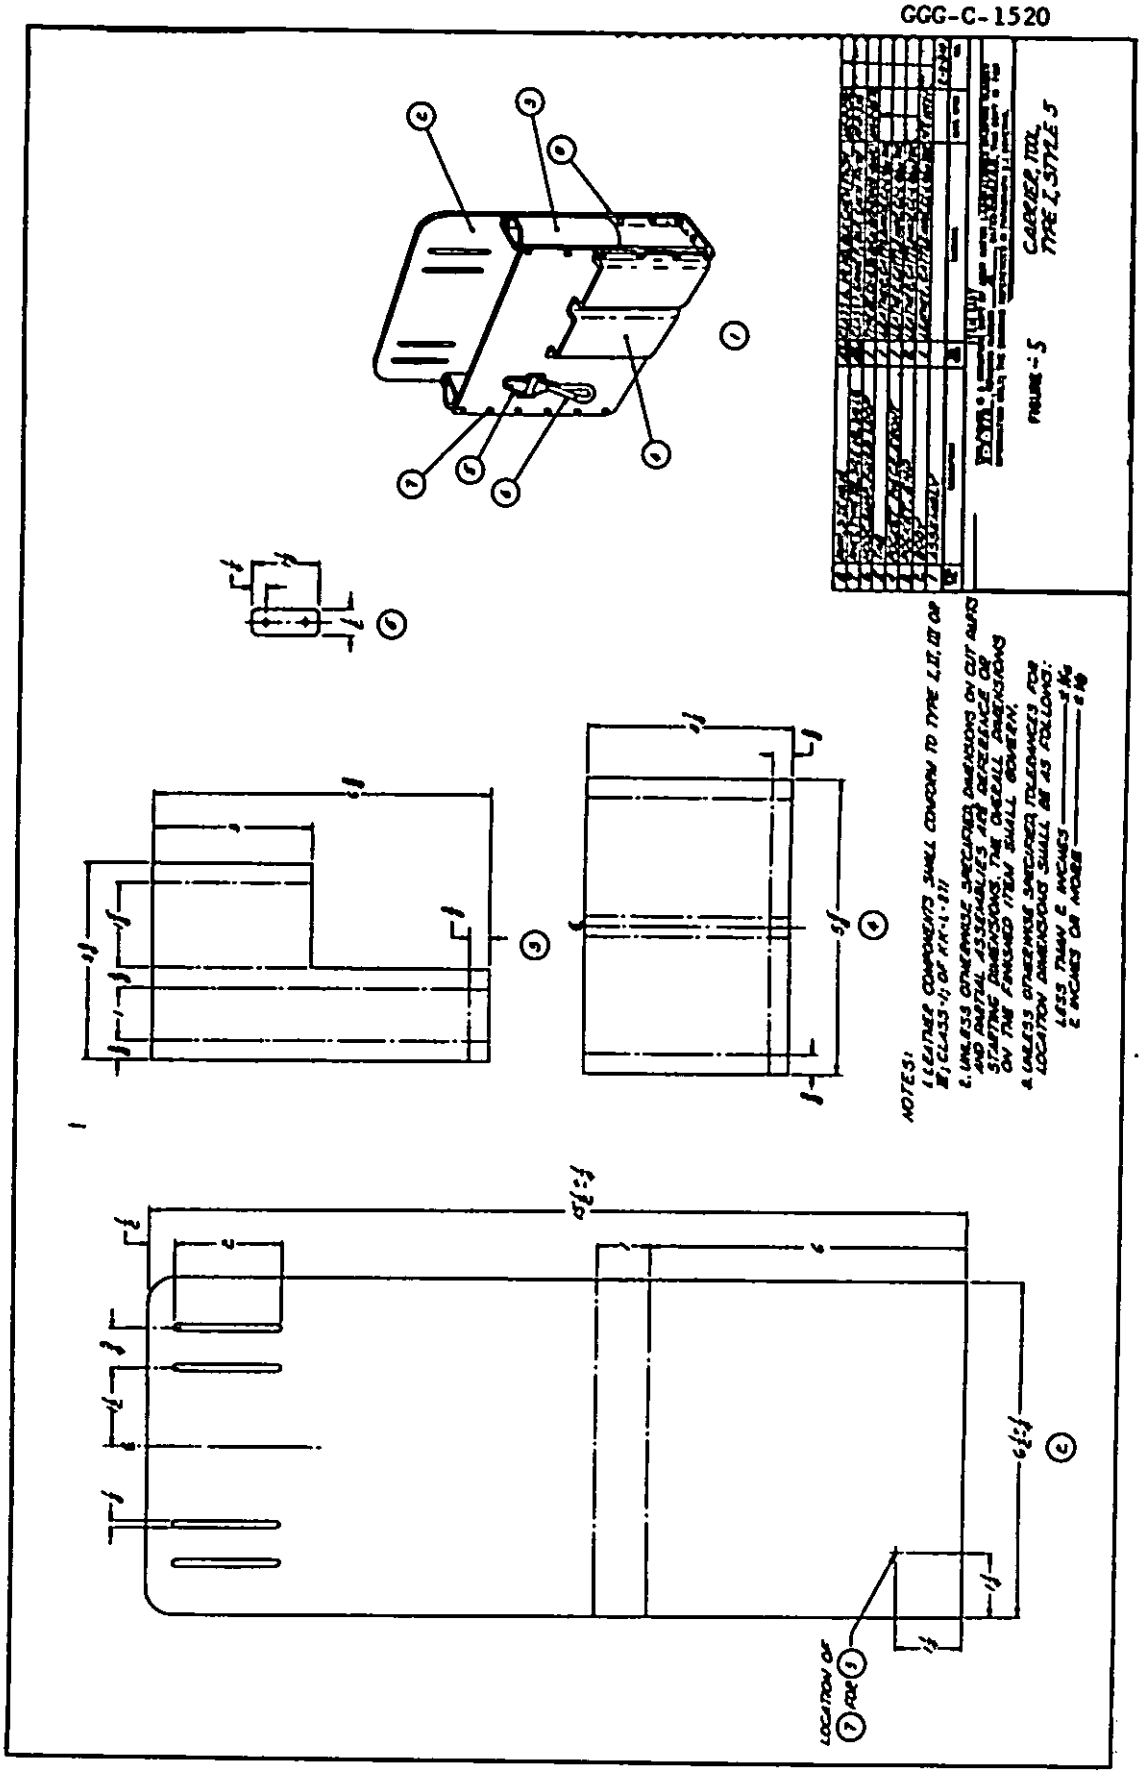

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

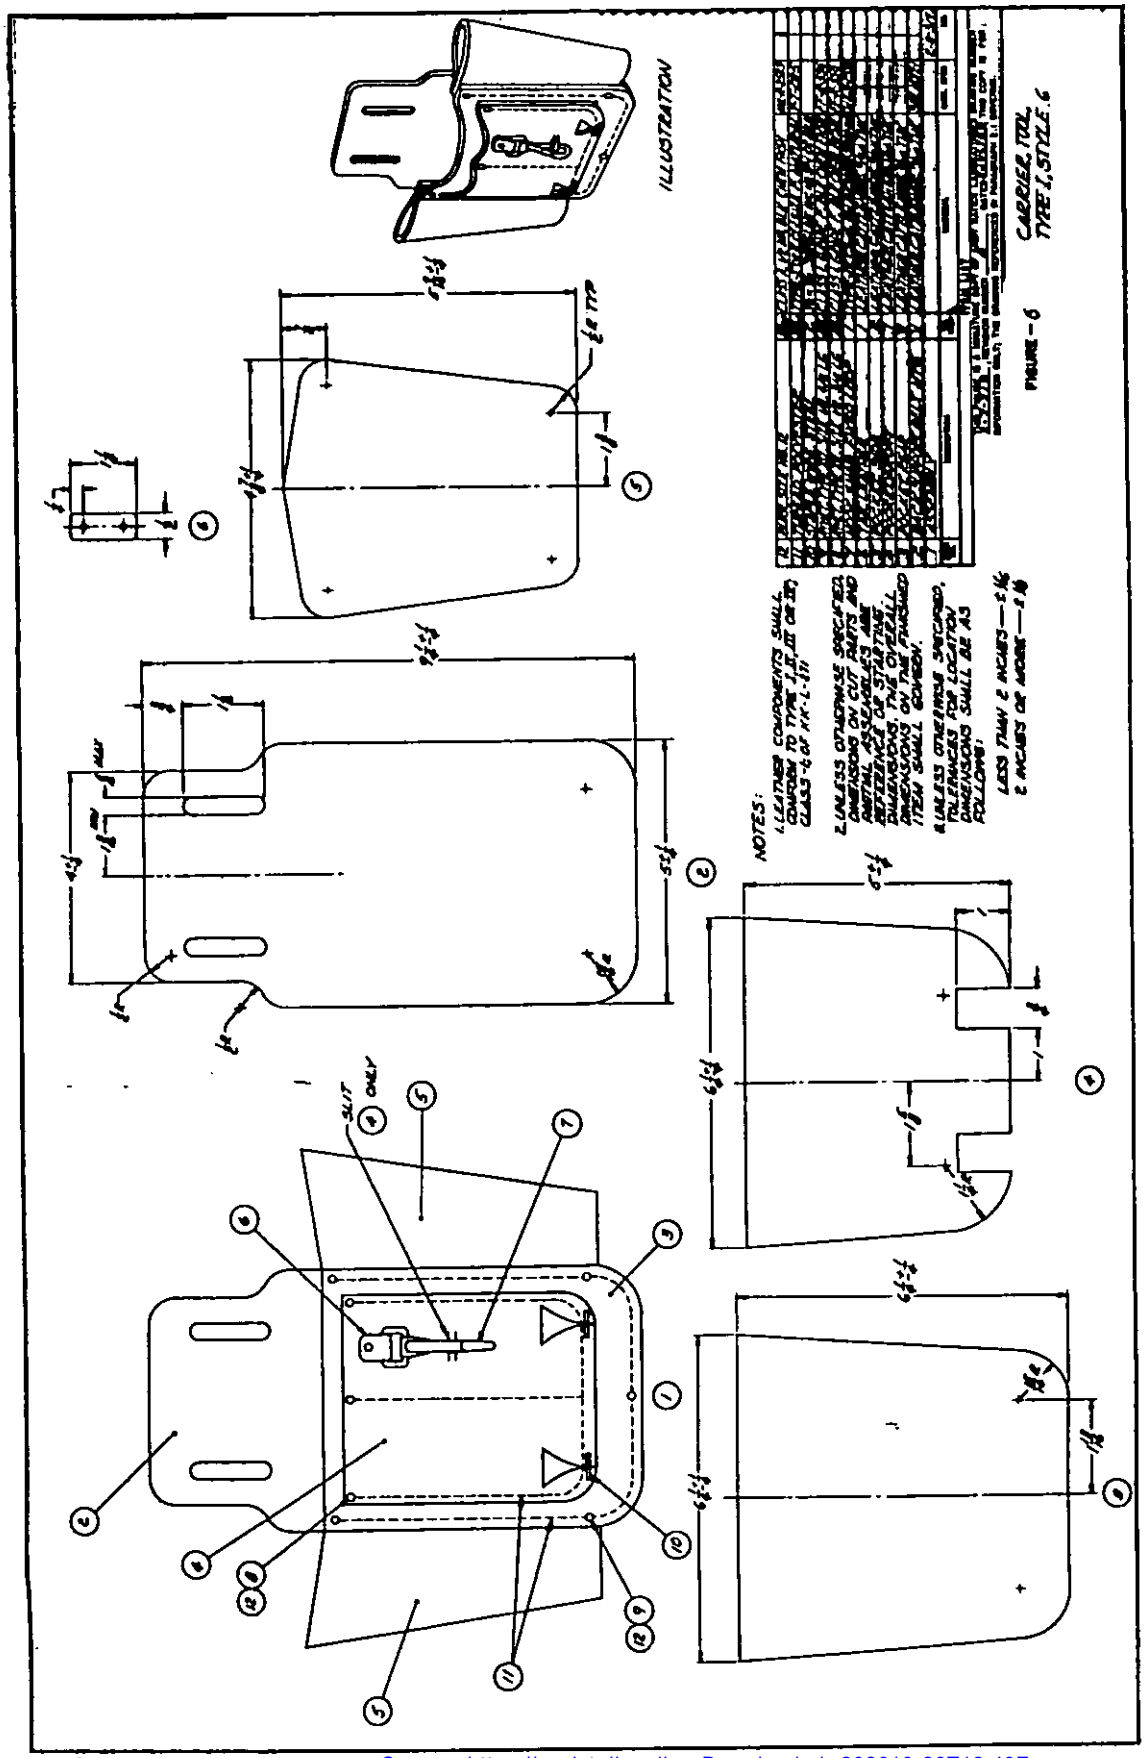

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.



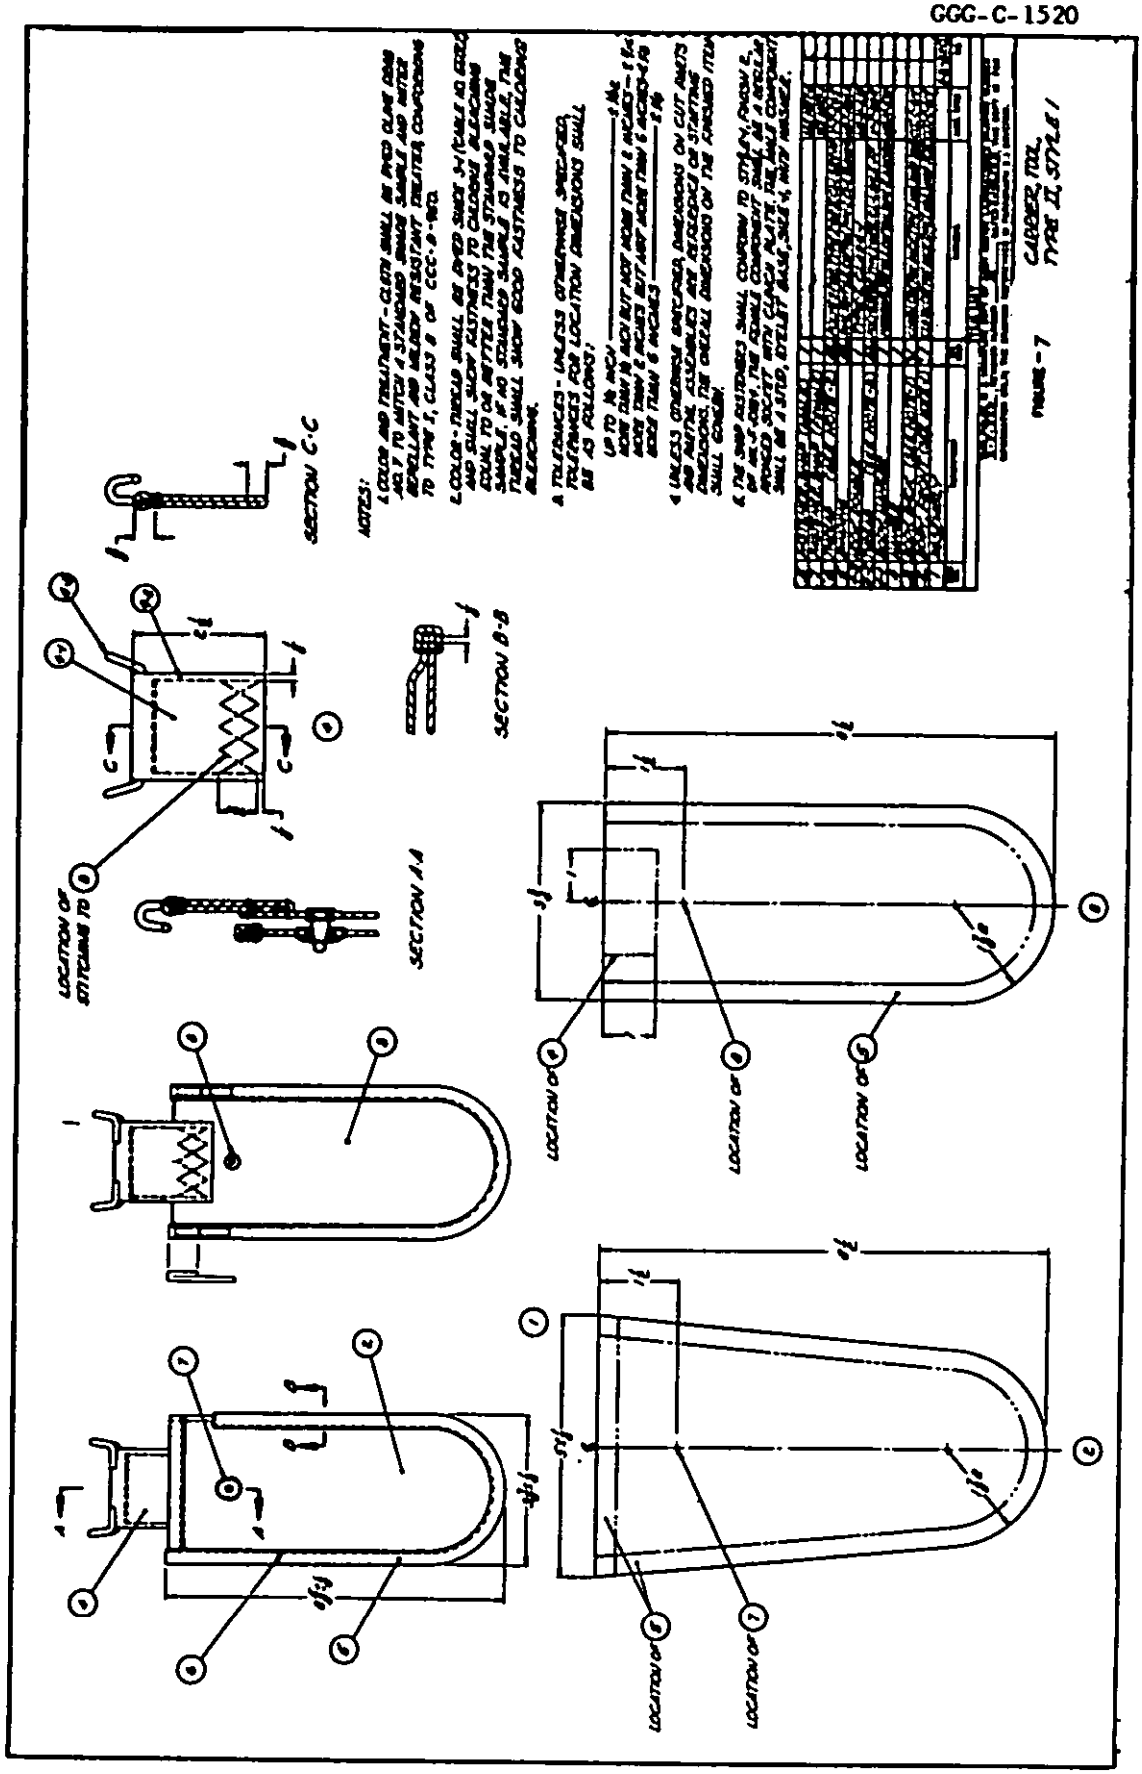


FIGURE - 7 CARRIER, TOOL, TYPE II, STYLE I


Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

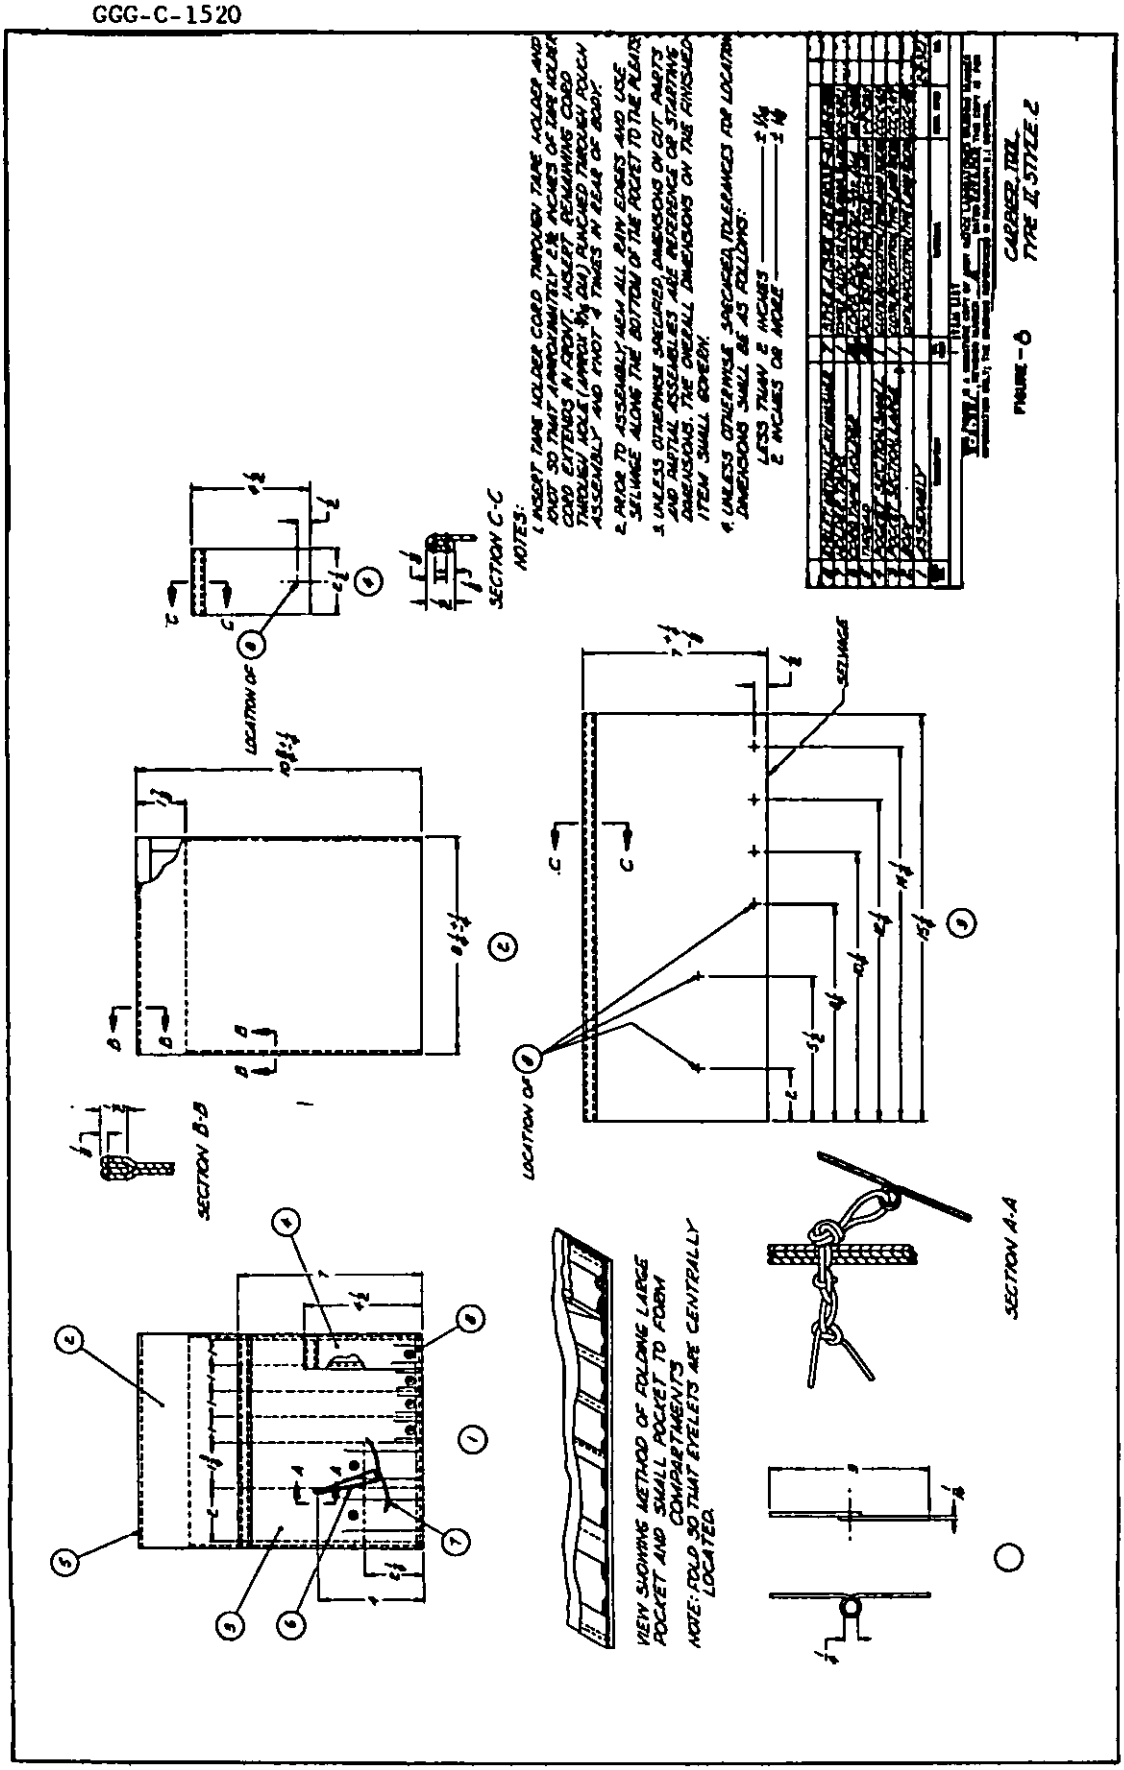

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

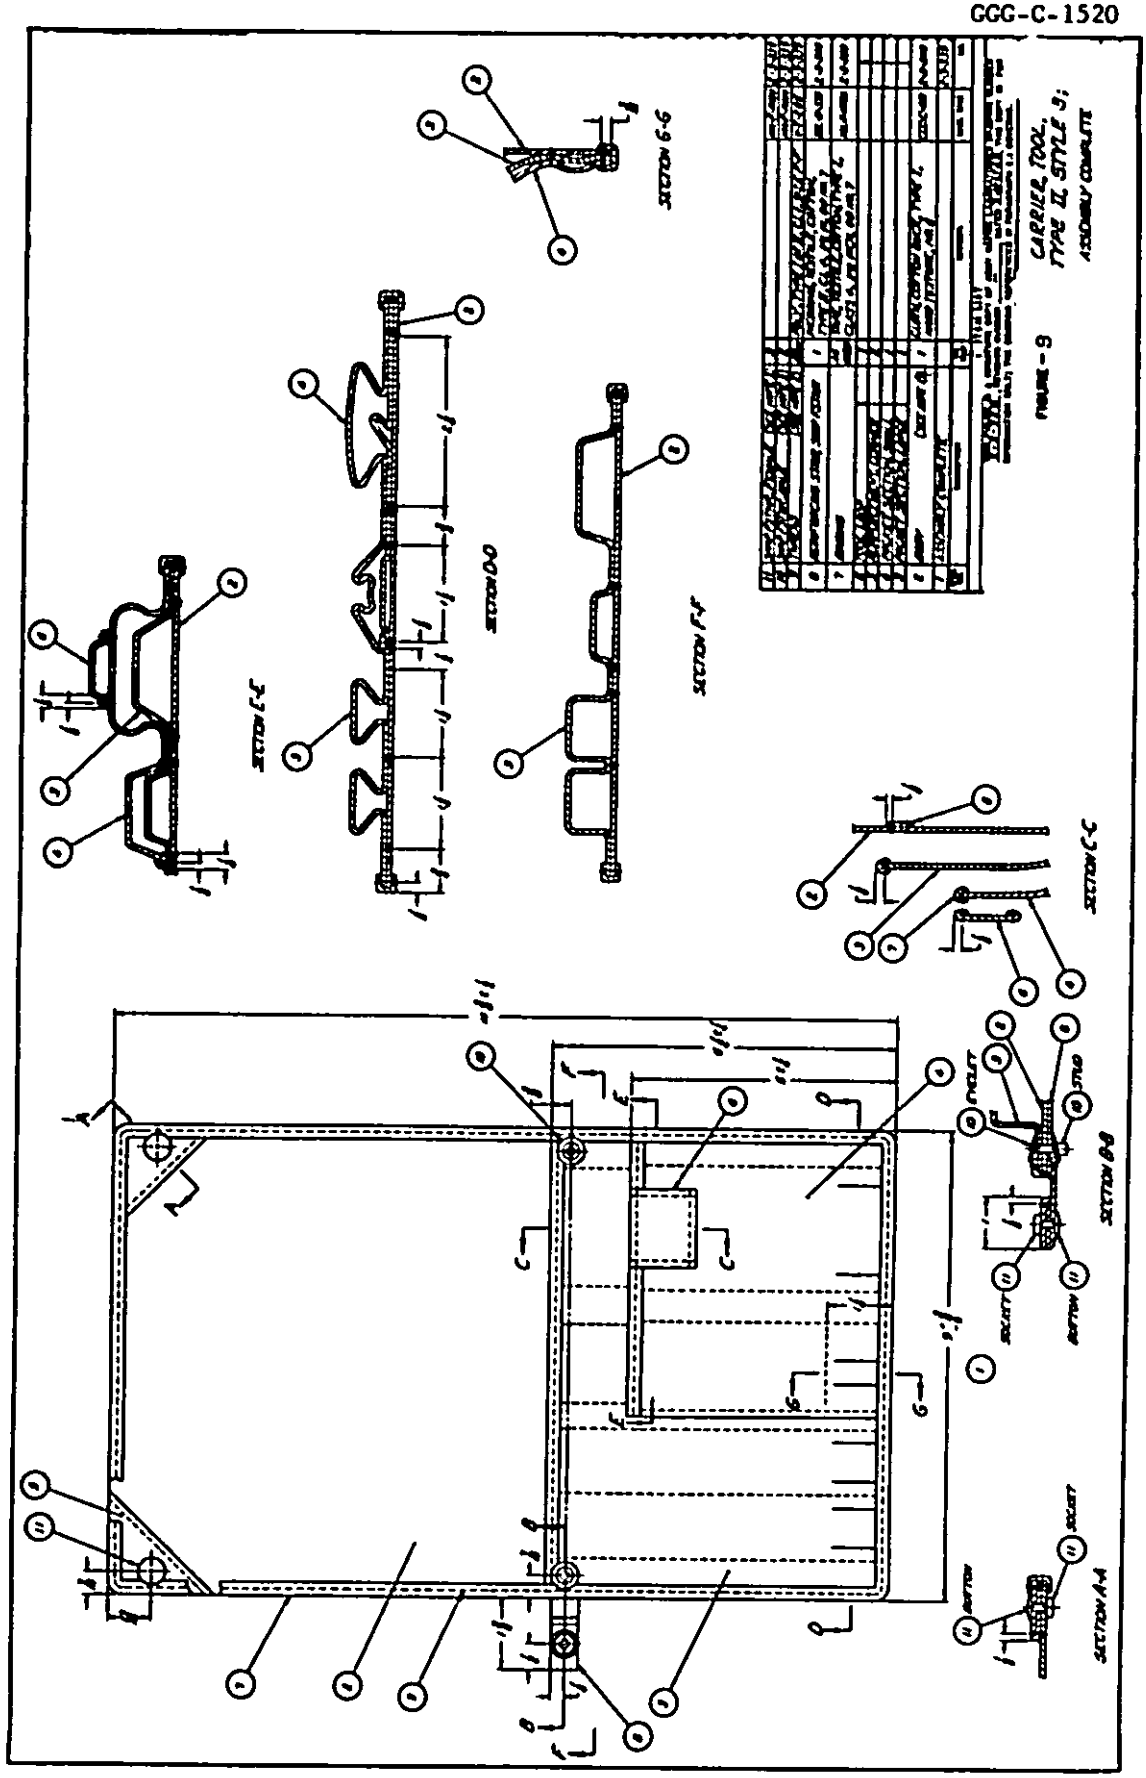

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the current version before use.

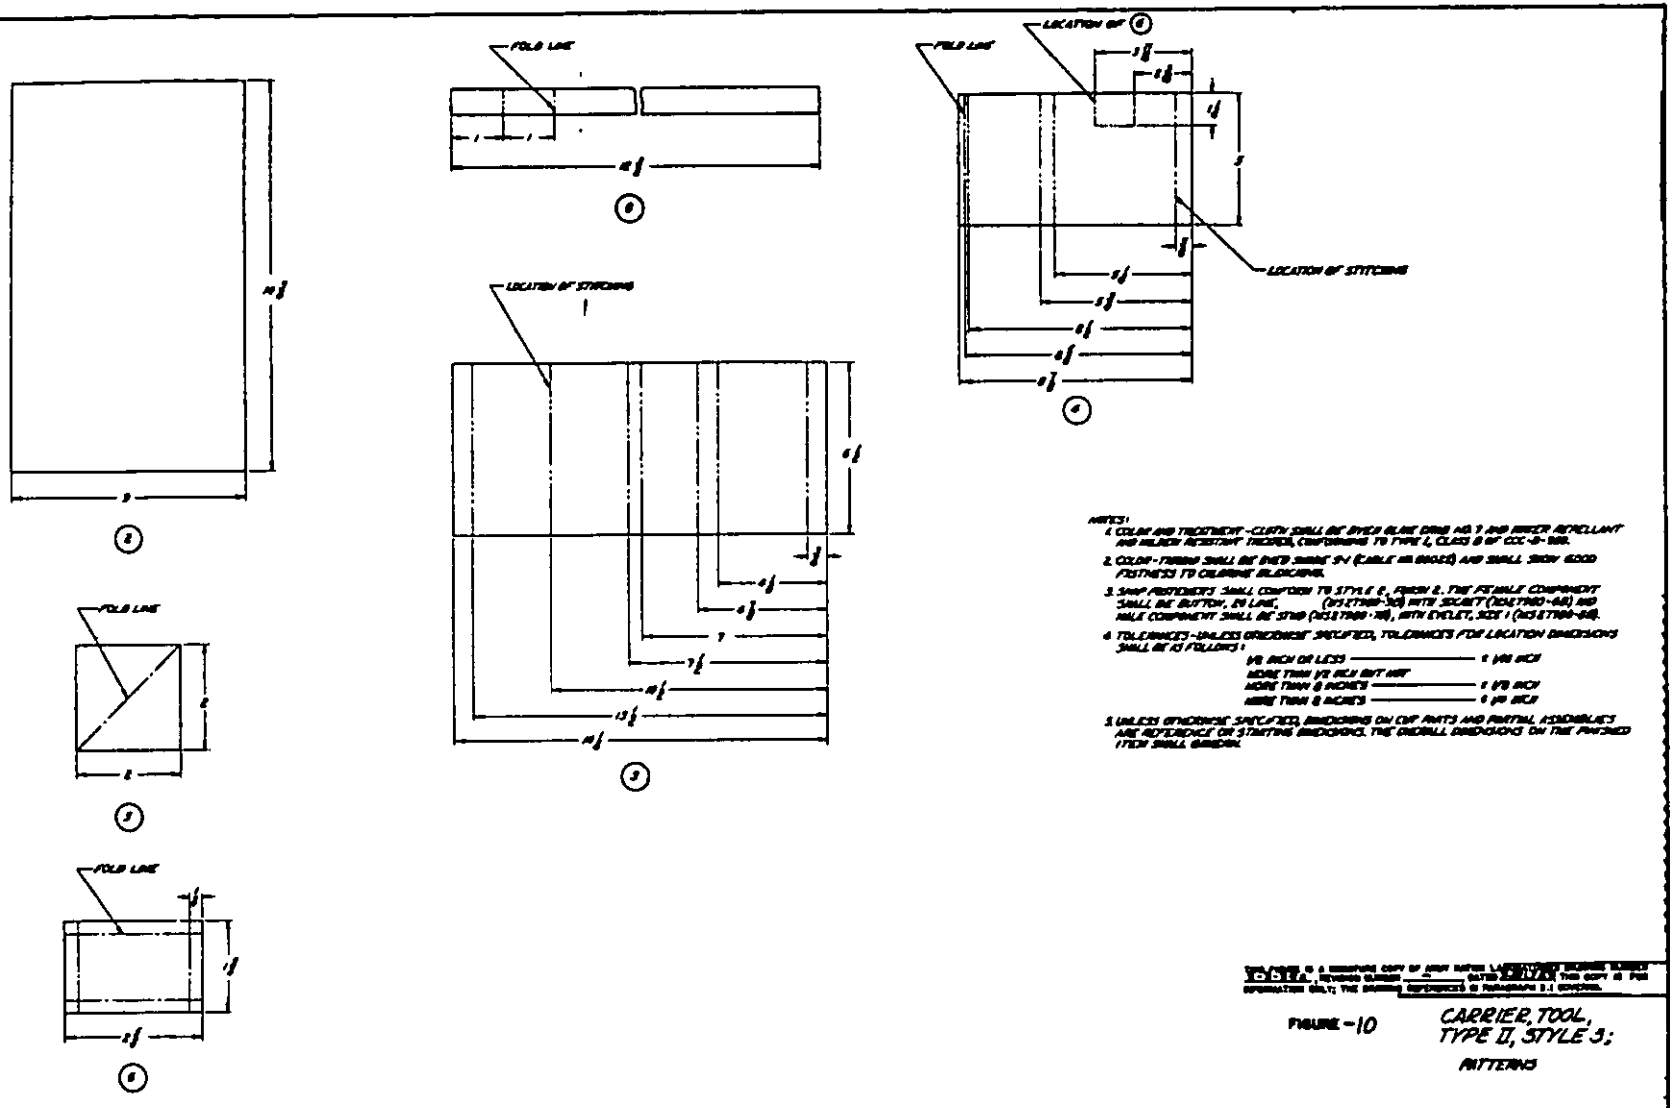

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 25 cents each.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1989 0 - 225-527 (4328)

Downloaded from http://www.everyspec.com
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Carrier, Tool GGG-C-1520

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the current version before use.

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.