GGG-K-275D
March 19, 1974
SUPERSEDING
Fed. Spec. GGG-K-275C
August 23, 1973

FEDERAL SPECIFICATION

KEY, SOCKET HEAD SCREW AND KEY SETS SOCKET HEAD (WRENCH, HEXAGON, SPLINE AND SQUARE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the tools used for tightening and loosening socket screw products.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and styles. Keys shall be of the following types, classes, and styles as specified (see 6.1):

Type I - Hexagon socket screw key, L type.
  Class 1 - Short series.
  Class 2 - Long series.

Type II - Spline socket screw key, L type.
  Class 1 - Short series.
  Class 2 - Long series.

Type III - Square socket screw key, L type.

Type IV - Key set, hexagon, multiple, self-contained.

Type VI - Tee handle, replaceable, nonadjustable bit.
  Style A - Hexagon.

Type VII - Screwdriver handle and hexagon bit, replaceable, adjustable bit.
  Class 1 - Short series.
  Class 2 - Long series.

Type VIII - Screwdriver handle and bit, nonreplaceable, nonadjustable bit.
  Style A - Hexagon.
  Style B - Spline.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

CCC-C-419 - Cloth, Duck, Cotton, Unbleached, Plied Yarns Army and Numbered.
PPP-P-40 - Packaging and Packing of Hand Tools.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-B-543 - Buckle, Tongueless, and Web Strap.
MIL-C-496 - Clip, End, Strap.
MIL-C-13924 - Coating, Oxide, Black, For Ferrous Metals.
MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural, or In Colors.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standards:

E18 - Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Standard Methods of Test for.
E384 - Microhardness of Materials, Standard Method of Test for.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing nd Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical Society and Technical Association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are descriptive and not restrictive, and are not intended to preclude the purchase of keys, bits, and key sets otherwise conforming to this specification.

3.2 Design. The design of the keys and bits shall be similar to the illustrations shown throughout this specification. Both ends of all "L" shaped keys and the working ends of bits shall be either plain or chamfered at the option of the manufacturer. The chamfer shall not exceed the values listed in tables IV thru XVI. Each key arm and bit shall be straight and of uniform size throughout its length.

3.2.1 Plastic handles. Except for cushion grip types, screwdriver plastic handles shall have no more than eight nor less than four flutes, they shall be transparent, amber, or yellow in color, and shall be chemically polished or suitably finished to provide a comfortable grip, and be free from rough edges, sharp corners, or tool marks that affect the appearance of the tool. Type VI handles need not be transparent, amber, or yellow. The handle material shall be subjected to the torsion test specified in 4.4.2 within one minute after the complete item has been uniformly heated to 125 °F.; this requirement shall not apply to type VI.

3.2.2 Dimensions. Dimensions on both ends of all "L" shaped keys, and the working ends of bits, shall be in accordance with the applicable tables herein. All dimensions are before plating.

3.3 Material. Keys and bits shall be made of a high grade alloy steel hardened and tempered so as to comply with the physical and mechanical requirements of this specification.

3.3.1 Test load. When tested as specified in 4.4.2, all keys shall withstand the test load specified in tables I, II, and III without injury or permanent deformation (set) which may affect their durability or serviceability.

3.4 Hardness. Keys and bits shall show, on any portion of the surface, a hardness of not less than 45 nor more than 52 for sizes 9/16 and greater and not less than 50 for sizes 7/64 through 1/2 inch on the Rockwell C scale when tested as specified in 4.4.1. Sizes 0.093 inch and smaller shall be tested in accordance with ASTM E384, using a Knoop indenter and shall have a hardness not less than 450 nor more than 640.

3.5 Surface finish. All surfaces shall be free from pits, nodules, burrs, cracks, and other defects of such magnitude that the durability or serviceability is not affected.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the currentversion before use.

3.5.1 Coating. The surface finish shall be black oxide and shall be a chemically produced oxide in accordance with MIL-C-13924, class 1, or oxide resulting from heat treatment followed by a coating of nondrying petroleum oils containing corrosion inhibitors. The coating shall be adherent, smooth, continuous, and free from uncoated areas, pits, blisters, nodules, or any defects which would affect the serviceability of the item. The coating thickness shall not exceed 0.0002 inch.

3.5.2 Case plating for type IV. Type IV key set cases shall be plated with electrodeposited zinc or nickel. A plating thickness of 0.00005 to 0.00015 inch, or that which is known in the plating trade as a "flash plate", will be acceptable.

3.6 Identification marking. Hexagon keys, L type, sizes 0.078 inch and larger, shall be stamped or engraved in a legible and permanent manner with the size and manufacturer's name or U. S. registered trademark of such known character that the source of manufacture may be readily determined. Spline keys, bits and keys of type IV sets need not be marked.

3.7 Sets. When sets of keys are required, the type, class, and sizes of the tools for the particular set should be specified in the contract or order (see 6.1). The components of the sets shall conform to the requirements of the respective items in this specification. Unless otherwise specified (see 6.1), sets may be furnished in any of the carrying containers of 3.8. When a specific carrying container is required, it shall be specified in the contract or order (see 6.1). When specified (see 6.1), type I, class 2 keys furnished as a set shall have all sizes of keys larger than 1/16 inch furnished with a long arm "c" of 6 inches, $\pm$0.250 inch.

3.8 Carrying containers for sets. Carrying containers for sets shall be constructed of fabric (see 3.8.3.1) or plastic (see 3.8.3.2), unless otherwise specified (see 6.1). Carrying containers for sets, as well as metal cases for type IV keys, shall be marked in a legible manner with the manufacturer's name and Federal Stock Number.

3.8.1 Wraps and rolls. Wraps and rolls shall be designed to contain keys in individual pockets marked with the individual key sizes. The length of the stitching or heat seal of pockets shall be not less than 60 percent of the full depth of the pocket or the full depth minus 1-1/2 inches, whichever provides the greatest length. All keys shall be easily removable and replaceable in the pockets. The pocket size and number of pockets shall be governed by the keys in each set. Stitching in fabric shall be at least 8-10 stitches per inch, in plastic 4-6 stitches per inch, and all stitching shall be of the lock stitch type and compatible in color with the stitched material. The thread shall be fungus and mildew resistant.

3.8.1.1 Wraps. Wrap pockets shall be individually stitched if fabric, or if plastic, heat sealed, or stitched. The edges of the body and the top of the pockets of fabric wraps shall have a stitched binding. Plastic wrap folds shall be heat sealed and edges shall be heat sealed or have a stitched binding which overlaps the edge on both sides. Wraps shall have a snap type fastener(s) for securing. Fasteners shall be easily opened and closed by hand.

3.8.1.2 Rolls. The edges of the body and the top of the pockets regardless of roll material, shall have a stitched binding. A water, mildew, and fungus

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

esistant cloth tape or webbed strap and buckle shall be attached to the back (outside) surface of the roll body to provide a means of retaining the tool roll in a rolled position. Rolls furnished with a strap and buckle shall be fitted with an attached 5/8 inch webbed strap in accordance with MIL-W-530, type IIb, class 4, and fitted with a 5/8 inch buckle in accordance with MIL-B-543, class 1, style 5 for neatly securing the roll and keys. The end clip on the free web end strap shall be in accordance with MIL-C-496, type I, class 1, 5/8 inch in size.

3.8.2 Envelopes. Envelopes shall have one pocket and meet the design and material requirements of 3.8.1, except that no marking for key sizes is required and in lieu of a webbed strap and buckle, one or more snap type fasteners, easily opened and closed by hand, shall be used for securing the envelope. Envelopes shall be sized and designed such that they will contain the set contents under all normal usage conditions.

3.8.2.1 Pouches. When specified (see 6.1), envelopes shall be designed with pockets and shall meet the wrap requirements of 3.8.1.

3.8.3 Materials.

3.8.3.1 Fabric. Fabric shall be cloth duck material in accordance with CCC-C-419, type I, number 10 hard texture for sets weighing up to 2 pounds or a maximum of 12 keys. When the set exceeds the 2 pound or 12 key limit, number 6 hard texture shall be used. The fabric shall be treated to resist water, mildew, and fungus and shall be olive drab number 7 in color.

3.8.3.2 Plastic. The body shall be of vinyl plastic and shall be a minimum 18 gage (0.018 $\pm$.001 inch) thick, color optional. The pockets shall be a minimum 12 gage (0.012 $\pm$.001 inch) thick, matte (40 to 50% clear) color. The plastic shall be capable of meeting the tests of 4.4.4.1.

3.9 Type I, hexagon socket screw key, L-type handle.

3.9.1 Class 1, short series, and class 2, long series. Classes 1 and 2 keys shall be similar to figure 1, and shall be so bent that the axis of the short arm shall be 90° $+2^{\circ}$ -2° to the axis of the long arm. Each end shall be square with the axis of its arm within the tolerance of $\pm 4^{\circ}$. Each arm shall be straight (see 4.4.3) and of uniform size throughout its length. The keys shall conform to table IV for the size specified (see 6.1).

3.10 Type II, spline socket screw key, L-type handle.

3.10.1 Class 1, short series, and class 2, long series. Classes 1 and 2 keys shall be similar to figure 2 and shall be bent so that the axis of the short arm shall be 90° $+2^{\circ}$ -2° to the axis of the long arm. Each end shall be square with the axis of each arm within a tolerance of $\pm 4^{\circ}$. Each arm shall be straight (see 4.4.3) and of uniform size throughout its length. The keys shall conform to table V for the size specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the currentversion before use.

3.11 Type III, square socket screw key, L-type handle. Type III square keys shall be similar to figure 3 and shall be bent so that the axis of the short arm shall be 90° +2° -2° to the axis of the long arm. Each end shall be square with the axis of each arm within a tolerance of ±4 . Each arm shall be straight (see 4.4.4) and of uniform size through its length. The keys shall conform to table VI for the size specified (see 6.1).

3.12 Type IV, key set, hexagon, multiple, self-contained. Type IV metal handle case shall be of sheet metal construction of sufficient strength to insure maximum usable pressure for the largest size hexagonal key in each set as specified in table VII. The case shall be designed to allow each key 180° independent motion, and keys secured by fasteners in such a manner as to allow replacement of individual keys. Design of case shall provide easy accessibility to keys when in closed position. The fasteners shall be coated as specified in 3.5.1. Type IV keys shall be similar to figure 4, and shall conform to table VII for set specified (see 6.1).

3.13 Type VI, tee handle, replaceable, nonadjustable bit. Type VI, tee handle, shall be similar to figure 5 and shall be made of high grade steel with a hardness of Rockwell C 45 to 52 or of solid molded plastic conforming to the requirements of 3.2.1. The handle for replaceable bits shall be provided with a set screw to permit interchange of the same size bit.

3.13.1 Type VI, style A. Type VI, style A, replaceable, hexagon bit and handle shall be similar to figure 5 and conform to dimensions as specified in table VIII for the size specified (see 6.1).

3.14 Type VII, class 1, screwdriver handle and hexagon bit, replaceable, adjustable bit, short series. Type VII, class 1, short series screwdriver handle and hexagon bit shall consist of a handle of plastic material with a steel chuck permanently mounted. The handle diameter shall be 3/4 ±1/32 inch, and 4 ±1/16 inches in length. The handle diameter for .028 +.035 hex sizes shall be 9/16 ±1/32 inch, and 2-7/8 ±1/16 inches in length. The handle shall be capable of providing a positive gripping surface. The chuck shall be so designed for holding a replaceable, adjustable, hexagon bit, and shall be provided with set screw for locking in required position. The handle and bit shall be similar to figure 6. The hexagon bits shall conform to dimensions as specified in table IX for the size specified (see 6.1).

3.14.1 Type VII, class 2, cushioned screwdriver handle and hexagon bit, replaceable, adjustable bit, long series. Type VII, class 2, long series cushioned screwdriver handle and hexagon bit shall consist of a handle of rubber or plastic material with a steel shaft permanently mounted. The handle diameter shall be 1-1/4 ±1/8 inches, and 4-3/16 ±1/8 inches in length. The handle shall be capable of providing a positive gripping surface. The steel shaft shall be designed for holding a replaceable, adjustable, hexagon bit and shall be provided with a set screw for locking in required position. The handle and bit shall be similar to figure 7 and shall conform to dimensions as specified in table X for the size specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

3.15 Type VIII, screwdriver handle and nonreplaceable, nonadjustable bit. Type VIII, screwdriver handle, nonreplaceable, nonadjustable bit shall consist of a handle of rubber or plastic material with a steel shaft permanently mounted. The handle shall be 1-1/8 inch diameter, ±1/32 inch, and 4-1/2 inches in length ±1/16 inch. The steel shaft shall be designed for nonreplaceable, nonadjustable bit.

3.15.1 Type VIII, style A, screwdriver handle, nonreplaceable, nonadjustable, hexagon key bit. Type VIII, style A, nonreplaceable, nonadjustable, hexagon key bit and cushioned screwdriver handle shall be similar to figure 8 and conform to dimensions as specified in table XI for the size specified (see 6.1).

3.15.2 Type VIII, style B, screwdriver handle, nonreplaceable, nonadjustable, hexagon key bit. Type VIII, style B, screwdriver handle, nonreplaceable, nonadjustable, hexagon key bit and screwdriver handle shall be similar to figure 9, except designed for spline key bits. The bit shall be similar to figure 9. The shaft and bit shall conform to dimensions as specified in table XII for the size specified (see 6.1).

3.16 Workmanship. Keys and bits shall be free from rust, scale, burrs, fins, pits, defects in coating, or other defects which may affect their durability or serviceability. In addition, the ends shall be formed in such a manner that distortion is negligible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements, as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table XIII.

4.3 Examination and testing.

4.3.1 Examination and testing of components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

4.3.1.1 Visual and dimensional examination. Each sample unit shall be examined for any nonconformance in design, dimension, material, finish, coating, construction, workmanship, and marking. Any key in the sample containing one or more defects shall be rejected, and if the number of defective keys in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.3.1.2 Testing. Each sample unit shall be tested in accordance with 4.4.

4.3.2 Examination and testing of sets. Examination and testing of sets shall be accomplished as individual components and paragraph 4.3.1 will apply. A lot size of "n" sets shall be treated as "n" lots of components. In addition, failure of any component (including the container) to meet the applicable Acceptable Quality Level (AQL) shall constitute rejection of the offered sets. Sets shall be further examined for completeness and correctness of components. Any wrong or missing component shall be scored as a defect.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 through 4.4.5.

4.4.1 Hardness test. Each of the sample keys and bits, except those 0.093 inch and smaller, shall be tested in accordance with ASTM E18 or equivalent micro hardness test to determine conformance with the hardness specified in 3.4. The hardness of samples 0.093 inch and smaller shall be determined with a Knoop indenter and tested in accordance with ASTM E384.

4.4.2 Torsion test. A torsion test shall be conducted to determine conformance with 3.3.1 and applicable test load requirements specified in the applicable tables. For key and blade sizes .028 through 1/4 inch, the load shall be further increased until the key fails. Failure shall occur by a uniform shear fracture for these sizes. The torsion test for types VI and VII shall be run within one minute after the complete item has been uniformly heated to 125° F. Suitable sockets shall be used to provide support and the necessary strength for the test load applied.

4.4.2.1 Method of test for type I, classes 1 and 2, type II, classes 1 and 2, and type III. The key shall be inserted into a female socket designed for the key being tested. The socket shall not exceed the maximum distance across the flats, or the maximum diameter of the spline by more than 0.001 inch and its hardness shall be not less than 60 on the Rockwell C scale. For sockets of 5/8 inch and larger, the hardness shall be not less than 45 on the Rockwell C scale. Length of key engagement shall be equal to the distance across flats or diameter of spline and in no case less than 1/16 inch. The keys shall withstand the torsional moment shown in tables I, II, and III. An angular reference line shall be established and the keys shall show less than a 5° permanent angular deflection. The load test shall be conducted as in figures 10, 11, or other comparable methods. The key shall show no flaws, cracks, or other defects which might affect its durability or serviceability. The part of the key inserted in the socket shall show no distortion or rounded corners.

4.4.2.2 Method of test for types IV, V, VI, and VII. The key or bit shall be inserted into a female socket designed for the size being tested. The socket

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the currentversion before use.

shall not exceed the maximum dimension of the key or bit across the flats, or the maximum diameter of the spline by more than 0.001 inch and its hardness shall be not less than 60 on the Rockwell "C" scale. Length of key or bit engagement shall be equal to the distance across flats, or the diameter of the spline, and in no instance less than 1/16 inch (see figure 12). The stress shall be applied by a force acting at or near the middle of the natural grip of the handle, the force to act substantially at right angles to the axis of the key and handle. The stress shall be applied with the key or bit and held securely in the fixed socket while the force is applied to an arm, bar, or clamp secured to the handle, or the stress may be exerted by a force applied to the handle, under which the key or bit and handle will be required to lift a dead weight attached to a lever arm, or in an equally satisfactory manner which will subject the tool to a known torsional stress from the handle and while the key or bit end is located in the socket. The force shall be applied by means of dead weights through a spring balance or other suitable load measuring device. The keys or bits shall withstand the twisting moment shown in tables I, II, and III with less than a 5° permanent angular deflection or set when compared to the reference line. It is permissible, when using the dead weight method of testing, to support the key or bit at or near the junction of the key or bit and handle in order to maintain the key or bit in a suitable position for testing. It is understood that deformation in the handle may occur due to the clamping action on the handle required to induce the torque, however, there shall be no slippage of the chuck in the handle.

4.4.3 Application performance test for all type of keys. The keys shall be capable of being inserted into an opening having a maximum distance across flats (for hexagon and square keys) or a maximum diameter (for spline keys) equal to the maximum key size plus 0.0003 inches. The key shall enter the opening for a distance equal to at least the nominal size of the key.

4.4.4 Tensile pull test for the pockets of wraps, envelopes, or rolls. The tensile pull test shall be applied to envelopes and to at least two pairs of pockets of wraps and rolls as follows: The container shall be fastened down to a flat surface in such a manner that the container is held securely to the surface at the seams to be tested. A test mandrel consisting of two legs at least 3 inches long and 1/4 to 1/2 inches wide shall be inserted into a pair of pockets for a roll or wrap, or on each side of the stitch or seal, or at each seam for an envelope. The mandrel shall be so formed that a straight tensile pull can be applied, through a spring scale or other suitable measuring device, perpendicular to the pockets. A straight tensile pull of at least 25 pounds, as registered on the scale, shall be applied. Any evidence of tearing of the pockets, or separation of the stitch or seal, shall be cause for rejection.

4.4.4.1 Plastic test. The plastic shall be tested to conform as follows:

-20° F.	Masland cold crack
1.30 maximum	Specific gravity
$\pm$0.001	Gage consistency
1.58 percent maximum	Volatility

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine whether the packaging, packing, and marking comply with the requirements of PPP-P-40.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A, B, or C, as specified (see 6.1).

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and style of key set required (see 1.2.1).
(c) Size required.
(d) When keys are furnished in sets, specify the type, class, and size required (see 3.7).
(e) When type I, class 2 keys are to be furnished as a set and all sizes of keys larger than 1/16 inch are to have a long arm "c" of 6 inches, so state (see 3.7).
(f) If other than wraps, rolls, or envelopes are required (see 3.7).
(g) If a specific carrying case is required, so state (see 3.7).
(h) If a specific material is required for carrying containers for sets, so state (see 3.8).
(i) When envelopes to have pockets, so state (see 3.8).
(j) Set number required (see 3.12).
(k) Selection of applicable levels of packaging and packing (see 5.1).

6.2 Type V keys are no longer covered by this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the currentversion before use.

TABLE I. Torsional moment for testing hexagon keys

Nominal key size hexagon	Torsional moment
Inches	Inch-pounds
0.028	.94
.035	1.9
.050	5.6
1/16	10.5
5/64	21.0
3/32	37.0
7/64	59.0
1/8	86.0
9/64	125.0
5/32	170.0
3/16	295.0
7/32	425.0
1/4	630.0
5/16	1,250.0
3/8	2,150.0
7/16	3,400.0
1/2	5,100.0
9/16	6,900.0
5/8	9,450.0
3/4	16,500.0
7/8	25,800.0

TABLE II. Torsional moment for testing spline keys

Nominal key size spline	Torsional moment
Inches	Inch-pounds
0 .033	.8
.048	2.4
.060	4.5
.069	7.0
.072	8.0
.076	19.0
.096	29.0
.111	50.0
.133	65.0
.145	111.0
.168	131.0
.183	216.0
.216	329.0
.251	530.0
.291	1,100.0
.372	2,000.0
.454	4,500.0
.595	5,100.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE III. Torsional moment for testing square keys

Nominal key size square	Torsional moment
Inch	Inch-pounds
0.125	63.0
.169	140.0
.218	407.0
.250	594.0
.296	1,122.0
.310	1,122.0
.312	1,122.0
.365	1,807.0
.375	1,807.0
.406	3,190.0
.430	3,190.0
.437	3,190.0
.500	4,620.0
.562	6,380.0
.625	6,380.0

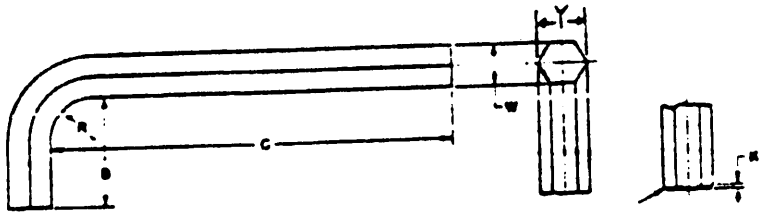


FIGURE 1. Type I, classes 1 and 2, hexagon socket screw key, short and long series.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Dimensions of hexagon keys, type I, classes 1 and 2

Nominal Key or Bit and Socket Size		W		Y		B		C				R	K
		Hexagon Width Across Flats		Hexagon Width Across Corners		Length of Short Arm		Length of Long Arm				Radius of Bend	Chamfer
								Short Series		Long Series			
		Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Min	Max
0.028		0.0280	0.0275	0.0314	0.0300	0.312	0.125	1.312	1.125	2.688	2.500	0.062	0.003
0.035		0.0350	0.0345	0.0393	0.0378	0.438	0.250	1.312	1.125	2.766	2.578	0.062	0.004
0.050		0.0500	0.0490	0.0560	0.0540	0.625	0.438	1.750	1.562	2.938	2.750	0.062	0.006
1/16	0.062	0.0625	0.0615	0.0701	0.0680	0.656	0.469	1.844	1.656	3.094	2.906	0.062	0.008
5/64	0.078	0.0781	0.0771	0.0880	0.0859	0.703	0.516	1.969	1.781	3.281	3.094	0.078	0.008
3/32	0.094	0.0937	0.0927	0.1058	0.1035	0.750	0.562	2.094	1.906	3.469	3.281	0.094	0.009
7/64	0.109	0.1094	0.1079	0.1238	0.1210	0.797	0.609	2.219	2.031	3.656	3.469	0.109	0.014
1/8	0.125	0.1250	0.1235	0.1418	0.1390	0.844	0.656	2.344	2.156	3.844	3.656	0.125	0.015
9/64	0.141	0.1406	0.1391	0.1593	0.1566	0.891	0.703	2.469	2.281	4.031	3.844	0.141	0.016
5/32	0.156	0.1562	0.1547	0.1774	0.1745	0.938	0.750	2.594	2.406	4.219	4.031	0.156	0.016
3/16	0.188	0.1875	0.1860	0.2135	0.2105	1.031	0.844	2.844	2.656	4.594	4.406	0.188	0.022
7/32	0.219	0.2187	0.2172	0.2490	0.2460	1.125	0.938	3.094	2.906	4.969	4.781	0.219	0.024
1/4	0.250	0.2500	0.2485	0.2845	0.2815	1.219	1.031	3.344	3.156	5.344	5.156	0.250	0.030
5/16	0.312	0.3125	0.3110	0.3570	0.3531	1.344	1.156	3.844	3.656	6.094	5.906	0.312	0.032
3/8	0.375	0.3750	0.3735	0.4300	0.4238	1.469	1.281	4.344	4.156	6.844	6.656	0.375	0.044
7/16	0.438	0.4375	0.4355	0.5018	0.4944	1.594	1.406	4.844	4.656	7.594	7.406	0.438	0.047
1/2	0.500	0.5000	0.4975	0.5735	0.5650	1.719	1.531	5.344	5.156	8.344	8.156	0.500	0.050
9/16	0.562	0.5625	0.5600	0.6452	0.6356	1.844	1.656	5.844	5.656	9.094	8.906	0.562	0.053
5/8	0.625	0.6250	0.6225	0.7169	0.7080	1.969	1.781	6.344	6.156	9.844	9.656	0.625	0.055
3/4	0.750	0.7500	0.7470	0.8603	0.8512	2.219	2.031	7.344	7.156	11.344	11.156	0.750	0.070
7/8	0.875	0.8750	0.8720	1.0036	0.9931	2.469	2.281	8.344	8.156	12.844	12.656	0.875	0.076
1	1.000	1.0000	0.9970	1.1470	1.1350	2.719	2.531	9.344	9.156	14.344	14.156	1.000	0.081

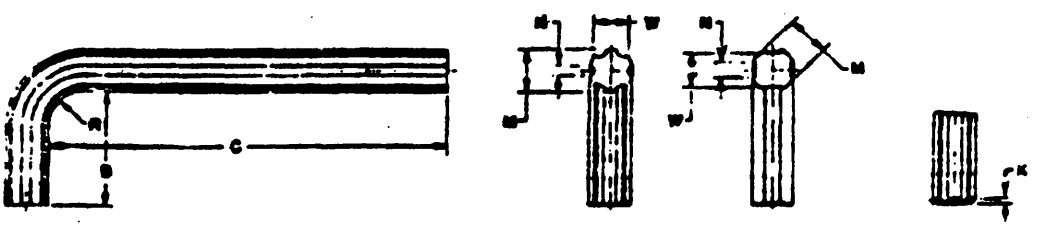


FIGURE 2. Type II, classes 1 and 2, spline socket screw, short and long series.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the currentversion before use.

TABLE V. Dimensions of spline keys, type II, classes 1 and 2

Nominal key and socket size	M		W		Number of splines	N		B		C				R	K
	Major diameter		Minor diameter			Width of space		Length of short arm		Length of long arm				Radius of bend	Chamfer
										Short series		Long series			
	Max.	Min.	Max.	Min.		Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Max.
0.033	0.0330	0.0320	0.0250	0.0240	4	0.0140	0.0130	0.31	0.13	1.31	1.13	...	...	0.062	0.003
.048	.0480	.0470	.0390	.0240	4	.0140	.0130	.31	.13	1.31	1.13	...	...	.062	.003
.048	.0480	.0470	.0390	.0380	6	.0130	.0120	.44	.25	1.31	1.13	...	...	.062	.004
.060	.0600	.0590	.0490	.0480	6	.0160	.0150	.63	.44	1.75	1.56	...	...	.062	.006
.069	.0690	.0680	.0590	.0580	4	.0190	.0180	.66	.47	1.84	1.66	...	...	.062	.008
.072	.0720	.0710	.0620	.0610	6	.0190	.0180	.66	.47	1.84	1.66	...	...	.062	.008
.076	.0760	.0750	.0660	.0650	4	.0190	.0180	.66	.47	1.84	1.66	...	...	.062	.008
.096	.0960	.0950	.0790	.0775	6	.0240	.0230	.70	.52	1.97	1.78	...	...	.078	.008
.111	.1110	.1100	.0940	.0925	6	.0280	.0270	.75	.56	2.09	1.91	...	...	.094	.009
.133	.1330	.1310	.1140	.1120	6	.0340	.0320	.80	.61	2.22	2.03	3.66	3.47	.125	.014
.145	.1450	.1435	.1240	.1225	6	.0355	.0340	.84	.66	2.34	2.16	3.84	3.66	.125	.015
.168	.1680	.1660	.1440	.1420	6	.0410	.0390	.89	.70	2.47	2.28	4.03	3.84	.156	.016
.183	.1830	.1815	.1580	.1565	6	.0440	.0425	.94	.75	2.59	2.41	4.22	4.03	.156	.016
.216	.2160	.2145	.1840	.1825	6	.0550	.0535	1.03	.84	2.84	2.66	4.59	4.41	.188	.022
.251	.2510	.2495	.2140	.2125	6	.0655	.0640	1.13	.94	3.09	2.91	4.97	4.78	.219	.024
.291	.2910	.2895	.2460	.2445	6	.0775	.0760	1.22	1.03	3.34	3.16	5.34	5.16	.250	.030
.372	.3720	.3705	.3100	.3085	6	.0975	.0960	1.34	1.16	3.84	3.66	6.09	5.91	.312	.032
.454	.4540	.4525	.3770	.3755	6	.1185	.1170	1.47	1.28	4.34	4.16	6.84	6.66	.375	.044
.595	.5950	.5935	.5000	.4975	6	.1460	.1445	1.72	1.53	5.34	5.16	8.34	8.16	.500	.050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

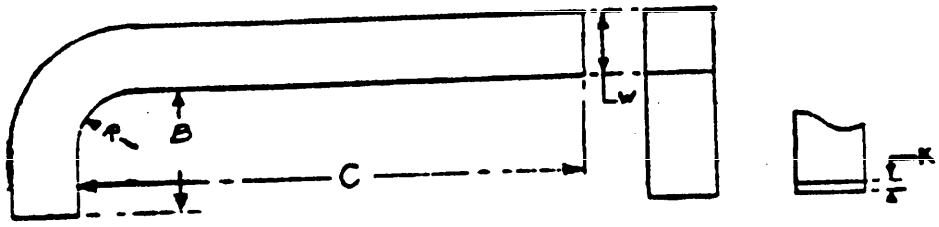


FIGURE 3. Type III, square socket screw key, L-type handle.

TABLE VI. Dimensions of square socket keys, type III

Nominal key size	W		B		C	R	K
	Width of square		Length of short arm		Length of long arm	Radius of bend	Chamfer
	Max.	Min.	Max.	Min.	± 1/8	Min.	Max.
Inch	Inch	Inch	Inches	Inches	Inches	Inch	Inch
1/4	0.250	0.249	1.22	1.03	5.63	0.250	0.030
3/8	.375	.374	1.47	1.28	6.75	.375	.044
1/2	.500	.498	1.72	1.53	12.25	.500	.050
5/8	.625	.623	1.97	1.78	6.00	.625	.055



FIGURE 4. Type IV, key set, hexagon, multiple, self-contained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE VII. Type IV, dimensions for key, set, hexagon, multiple, self-contained

Set number	Size (ordering designation)	Width across flats		Width across corners		Length of keys (excluding loops)		Torsional moment	Chamfer
		Max.	Min.	Max.	Min.	Max.	Min.		Max.
		Inch	Inch	Inch	Inch	Inches	Inches	Inch-pounds	Inch
Short series									
1	0.050	0.0500	0.0490	0.0560	0.0540	1.38	1.25	5.6	0.006
	1/16	.0625	.0615	.0701	.0680	1.50	1.38	10.5	.008
	5/64	.0781	.0771	.0880	.0859	1.56	1.44	21	.008
	3/32	.0937	.0927	.1058	.1035	1.75	1.63	37	.009
	7/64	.1094	.1079	.1238	.1210	1.75	1.63	59	.014
	1/8	.1250	.1235	.1418	.1390	1.63	1.50	86	.015
	9/64	.1406	.1391	.1593	.1566	1.63	1.50	125	.016
	5/32	.1562	.1547	.1774	.1745	1.75	1.63	170	.016
2	3/32	.0937	.0927	.1058	.1035	1.50	1.38	20	.009
	7/64	.1094	.1079	.1238	.1210	1.50	1.38	59	.014
	1/8	.1250	.1235	.1418	.1390	1.63	1.50	86	.015
	9/64	.1406	.1391	.1593	.1566	1.63	1.50	125	.016
	5/32	.1562	.1547	.1774	.1745	1.81	1.69	170	.016
	3/16	.1875	.1860	.2135	.2105	1.88	1.75	295	.022
	7/32	.2187	.2172	.2490	.2460	2.00	1.88	425	.024
3	9/64	.1406	.1391	.1593	.1566	2.50	2.38	125	.016
	5/32	.1562	.1547	.1774	.1745	2.50	2.38	170	.016
	3/16	.1875	.1860	.2135	.2105	2.56	2.44	295	.022
	7/32	.2187	.2172	.2490	.2460	2.63	2.50	425	.024
	1/4	.2500	.2485	.2845	.2815	2.94	2.81	630	.030
	5/16	.3125	.3110	.3570	.3531	3.06	2.31	1,250	.032
Long series									
4	3/32	.0937	.0927	.1058	.1035	4.31	4.19	20	.009
	7/64	.1094	.1079	.1238	.1210	4.31	4.19	59	.014
	1/8	.1250	.1235	.1418	.1390	4.50	4.38	86	.015
	9/64	.1406	.1391	.1593	.1566	4.50	4.38	125	.016
	5/32	.1562	.1547	.1774	.1745	4.56	4.44	170	.016
	3/16	.1875	.1860	.2135	.2105	4.63	4.50	295	.022
	7/32	.2187	.2172	.2490	.2460	4.38	4.25	425	.024
	1/4	.2500	.2485	.2845	.2815	4.00	4.00	630	.030

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the currentversion before use.

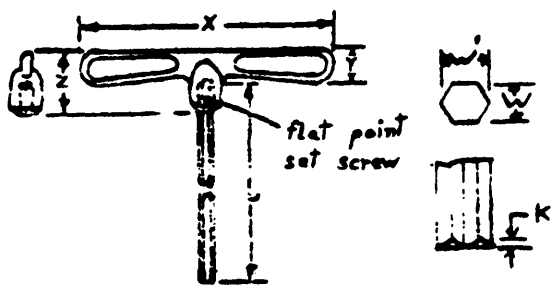


FIGURE 5. Type VI, tee handle, replaceable, nonadjustable bit.

TABLE V[illegible]. Type VI, style A, dimensions for tee handle, hexagon key, replaceable bit

Nominal key size	W		X		Y	Z	L		K
	Width across flats		Width across corners		Length of handle		0.063	0.125	Length of bit		Chamfer
	Max.	Min.	Max.	Min.	Max.	Min.			Max.	Min.	Max.
Inch	Inch	Inch	Inch	Inch	Inches	Inches	Inch	Inches	Inches	Inches	Inch
1/16	0.0625	0.0615	0.0701	0.0680	3.00	2.50	0.50	0.94	3.25	2.75	0.008
1/16	.0625	.0615	.0701	.0680	3.00	2.50	.50	.94	15.75	15.25	.008
5/64	.0781	.0771	.0880	.0859	3.00	2.50	.50	.94	4.88	4.38	.008
3/32	.0937	.0927	.1058	.1035	3.00	2.50	.50	.94	3.25	2.75	.009
3/32	.0937	.0927	.1058	.1035	3.00	2.50	.50	.94	5.25	4.75	.009
3/32	.0937	.0927	.1058	.1035	3.00	2.50	.50	.94	13.50	13.00	.009
7/64	.1094	.1079	.1238	.1210	3.00	2.50	.50	.94	4.25	3.75	.014
1/8	.1250	.1235	.1418	.1390	3.00	2.50	.50	.94	3.25	2.75	.015
1/8	.1250	.1235	.1418	.1390	3.00	2.50	.50	.94	5.25	4.75	.015
1/8	.1250	.1235	.1418	.1390	3.00	2.50	.50	.94	4.88	4.38	.015
1/8	.1250	.1235	.1418	.1390	3.00	2.50	.50	.94	13.25	12.75	.015
9/64	.1406	.1391	.1593	.1566	3.00	2.50	.50	.94	4.00	3.50	.016
5/32	.1562	.1547	.1774	.1745	3.00	2.50	.50	.94	3.25	2.75	.016
5/32	.1562	.1547	.1774	.1745	3.00	2.50	.50	.94	5.25	4.75	.016
5/32	.1562	.1547	.1774	.1745	3.00	2.50	.50	.94	5.81	5.31	.016
5/32	.1562	.1547	.1774	.1745	3.00	2.50	.50	.94	8.25	7.75	.016
3/16	.1875	.1860	.2135	.2105	4.50	4.00	.63	1.13	6.13	5.63	.022
3/16	.1875	.1860	.2135	.2105	4.50	4.00	.63	1.13	8.25	7.75	.022
7/32	.2187	.2172	.2490	.2460	4.50	4.00	.63	1.13	6.88	6.38	.024
7/32	.2187	.2172	.2490	.2460	4.50	4.00	.63	1.13	8.25	7.75	.024
1/4	.2500	.2485	.2845	.2815	4.50	4.00	.63	1.13	6.25	5.75	.030
5/16	.3125	.3110	.3570	.3531	5.75	5.25	.69	1.38	7.25	6.75	.032
3/8	.3750	.3735	.4300	.4238	5.75	5.25	.69	1.38	5.25	4.75	.044
3/8	.3750	.3735	.5018	.4238	5.75	5.25	.69	1.38	7.25	6.75	.044
1/2	.5000	.4975	.5735	.5650	7.50	7.00	.88	1.75	4.88	4.38	.050
9/16	.5625	.5600	.6452	.6356	7.50	7.00	.88	1.75	6.25	5.75	.053
5/8	.6250	.6225	.7169	.7080	7.50	7.00	.88	1.75	7.25	6.75	.055

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the current version before use.

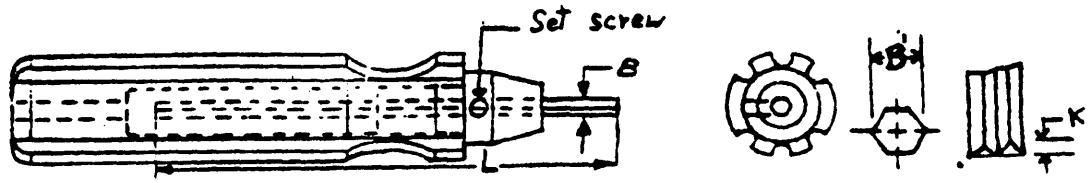


FIGURE 6. Type VII, class 1, screwdriver handle, hexagon bit, replaceable, adjustable bit, short series.

TABLE IX. Type VII, class 1, dimensions for screwdriver handle hexagon bit, replaceable, adjustable bits

Nominal key size	B		B'		L		K
	Width across flats		Width across corners		Length of bit		Chamfer
	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Inch	Inch	Inch	Inch	Inch	Inches	Inches	Inch
0.028	0.0280	0.0275	0.0314	0.0300	2-1/8	1-7/8	0.003
.035	.0350	.0345	.0393	.0378	2-1/8	1-7/8	.004
.050	.0500	.0490	.0560	.0540	3-1/8	2-7/8	.006
1/16	.0625	.0615	.0701	.0680	3-1/8	2-7/8	.008
5/64	.0781	.0771	.0880	.0859	3-1/8	2-7/8	.008
5/64	.0781	.0771	.0880	.0859	6-1/8	5-7/8	.008
3/32	.0937	.0927	.1058	.1035	3-1/8	2-7/8	.009
3/32	.0937	.0927	.1058	.1035	6-1/8	5-7/8	.009
3/32	.0937	.0927	.1058	.1035	13-1/8	12-7/8	.009
7/64	.1094	.1079	.1238	.1210	6-1/8	5-7/8	.014
1/8	.1250	.1235	.1418	.1390	6-1/8	5-7/8	.015
1/8	.1250	.1235	.1418	.1390	11-21/32	11-13/32	.015
9/64	.1406	.1391	.1593	.1566	6-1/8	5-7/8	.016
5/32	.1562	.1547	.1774	.1745	6-1/8	5-7/8	.016

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the current version before use.

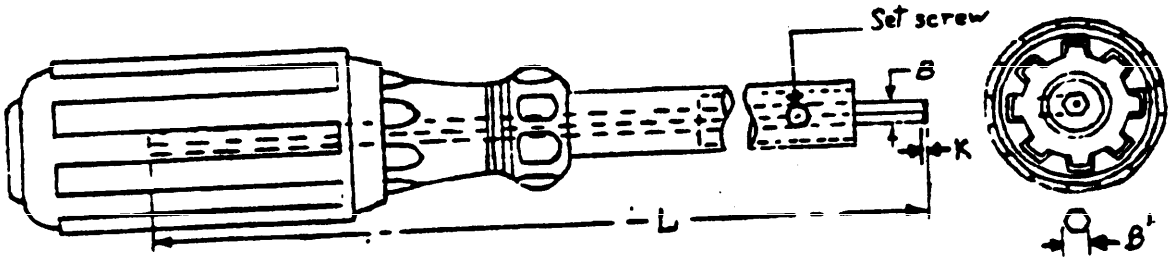


FIGURE 7. Type VII, class 2, screwdriver handle and hexagon bit.

TABLE X. Type VII, class 2, dimensions for screwdriver handle hexagon bit, replaceable, adjustable bits

Nominal key size	B		B'		L		K
	Width across flats		Width across corners		Length of bit		Chamfer
	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Inch	Inch	Inch	Inch	Inch	Inches	Inches	Inch
0.035	0.0350	0.0345	0.0393	0.0378	6.00	4.13	0.004
.050	.0500	.0490	.0560	.0540	6.00	4.13	.006
1/16	.0625	.0615	.0701	.0680	6.00	4.13	.008
5/64	.0781	.0771	.0880	.0859	6.13	5.88	.008
5/64	.0781	.0771	.0880	.0859	6.00	4.13	.009
3/32	.0937	.0927	.1058	.1035	6.13	5.88	.009
3/32	.0937	.0927	.1058	.1035	13.13	12.88	.009
3/32	.0937	.0927	.1058	.1035	6.13	5.88	.014
7/64	.1094	.1079	.1238	.1210	6.13	5.88	.015
1/8	.1250	.1235	.1418	.1390	11.66	11.41	.015
1/8	.1250	.1235	.1418	.1390	6.13	5.88	.016
9/64	.1406	.1391	.1593	.1566	6.13	5.88	.016
5/32	.1562	.1547	.1774	.1745	6.13	5.88	.022
3/16	.1875	.1860	.2135	.2105	11.13	10.88	.030
1/4	.2500	.2485	.2845	.2815	6.13	5.88	.032
5/16	.3125	.3110	.3570	.3531	3.63	3.38	.047
7/16	.4375	.4355	.5018	.4944			

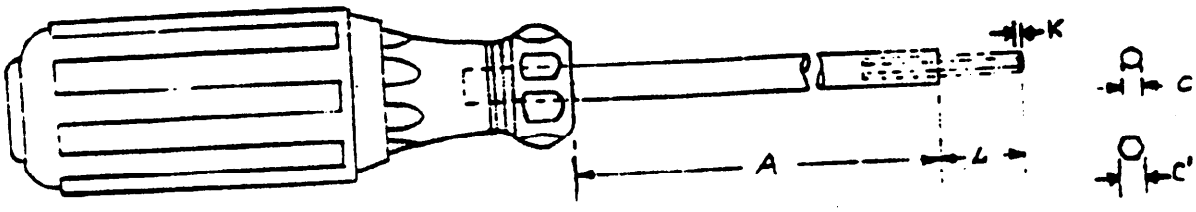


FIGURE 8. Type VIII, screwdriver handle, nonreplaceable, nonadjustable bit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE XI. Type VIII, style A, dimensions for hexagon bit and shaft, nonreplaceable, nonadjustable bit

Nominal key size	C		C'		A	L		K
	Width across flats		Width across corners		Length of shaft	Length of bit		Chamfer
	Max.	Min.	Max.	Min.	± 1/8	Max.	Min.	Max.
Inch	Inch	Inch	Inch	Inch	Inches	Inches	Inch	Inch
7/32	0.2187	0.2172	0.2490	0.2460	6	1-1/2	1	0.024
7/32	.2187	.2172	.2490	.2460	7-7/8	1-1/2	1	.024
5/16	.3125	.3110	.3570	.3531	15	1-1/2	1	.032
3/8	.3750	.3735	.4300	.4238	12	1-1/2	1	.044

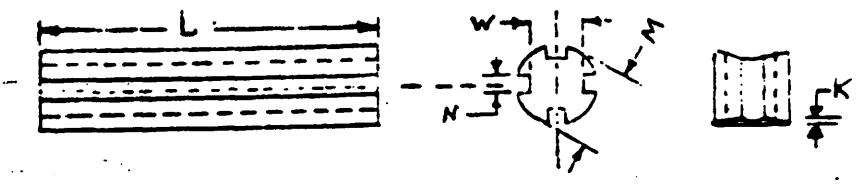


FIGURE 9. Type VIII, style B, spline bit.

TABLE XII. Type VIII, style B, dimensions for spline bit and shaft, nonreplaceable, nonadjustable bit

Nominal key size	M		W		No. of splines	N		A	L		K
	Major diameter		Minor diameter			Width of space		Length of shaft	Length of bit		Chamfer
	Max.	Min.	Max.	Min.		Max.	Min.	± 1/8	Max.	Min.	Max.
Inch	Inch	Inch	Inch	Inch		Inch	Inch	Inches	Inches	Inch	Inch
0.595	0.5950	0.5935	0.5000	0.4975	6	0.1460	0.1445	9.625	1.500	1	0.050

TABLE XIII. Sampling data

Category	Sample unit	Inspection level	Acceptable quality level (AQL)	AQL expressed in terms of	Reference
Visual and dimensional examination	Component 1 each	II	2.5	Percent defective	Para. 4.3.1.1
Testing	Component 1 each	S-1	1.5	Percent defective	Para. 4.3.1.2
Preparation for delivery	One container	S-2	4.0	Defects per hundred units	Para. 4.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

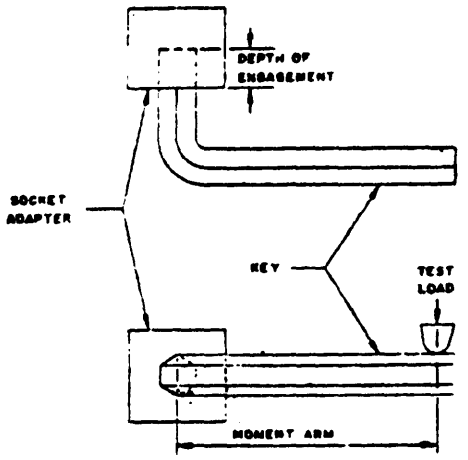


FIGURE 10.


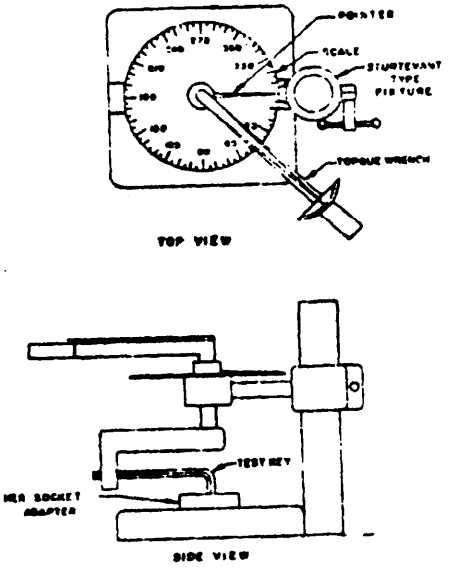


FIGURE 11.

FIGURES 10 and 11. Torsional moment load application.

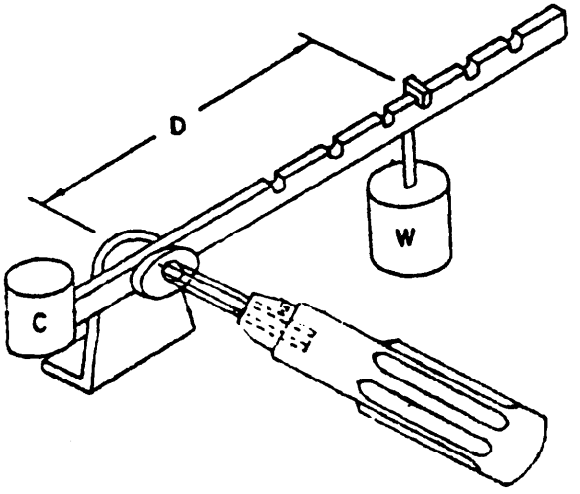

METHOD OF TORSION TEST
D x W = INCH LBS.
D = DISTANCE IN INCHES
W = WEIGHT IN LBS.
C IS A COUNTERWEIGHT USED TO BALANCE BEAM.

FIGURE 12. Torsional moment test.

NOTE: The above method is not intended to restrict the manner in which the required tests shall be taken.

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - MOA

Preparing activity:

GSA-FSS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-EMS (Mr. W.J. Doyle)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.