GGG-L-001345(GSA-FSS)
December 8, 1967

INTERIM FEDERAL SPECIFICATION

LEAD JOINT RUNNER

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers an asbestos, rope-like device, with clamps, used while pouring and holding molten lead on water, gas, or soil pipes until it hardens and forms a seal-tight joint.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity indicated by the title of the specification, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type and sizes. Joint runner shall be of one type and of the sizes specified (see table I and 6.1).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:
PPP-B-636 - Box, Fiberboard.
PPP-B-640 - Boxes, Fiberboard, Corrugated, Triple-Wall.

Federal Standard:
Fed. Std. No. 123 - Marking for Domestic Shipment and Storage (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, and Auburn, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Nongovernmental:
Uniform Freight Classification or Consolidated Freight Classification.

(Application for copies should be addressed to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

National Motor Freight Classification.

(Application for copies should be addressed to the National Classification Board, 1424 Sixteenth Street, N. W., Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 Material and design. Runner shall be of asbestos yarn, consisting of two or more braids or plaits over a firmly twisted core, and squared to proper size. Brass, aluminum, or steel ferrules shall be securely fitted over each end of the runner to prevent unlaying. A malleable iron, aluminum, or cadmium-plated steel clamp shall be provided for gripping the two ends of the runner and holding it on the pipe. The clamp shall be securely attached to one end of the runner by means of a 4-inch minimum length chain which shall prevent the clamp from being lost from runner when not in use.

3.1.1 Asbestos. The asbestos yarn shall consist of tough, closely woven fibers that shall be unaffected by molten lead.

3.2 Sizes. Runners shall be of the sizes specified in table I, and be similar to figure 1.

TABLE I. Lead joint runners

Pipe size outside diameter	Distance across flats (min.)	Overall length of runner (min.)
Inches	Inches	Inches
2 to 4	3/4	24
4 to 6	3/4	28
6 to 10	1	40
10 to 14	1	60
16 to 20	1-1/4	80

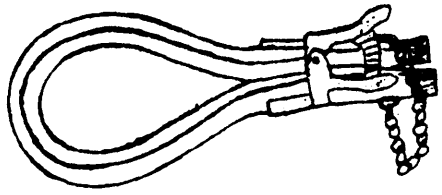


FIGURE 1. Lead joint runner.

3.3 Identification marking. Each runner shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.4 Finish. All ferrous metal parts shall be plated, painted, or otherwise treated to resist corrosion.

3.5 Workmanship. The runner shall be uniformly plaited or braided, and free from imperfections that might affect serviceability. Metal parts shall be free of burrs and sharp edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table II.

TABLE II. Sampling data

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	1 each	II	4.0	Defects per hundred units	4.3.1
Dimensional examination	1 each	S-4	1.5	Defects per hundred units	4.3.2
Preparation for delivery	One container	S-2	4.0	Defects per hundred units	4.4

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of preparation for delivery defects.

Examine	Defects
Containers	Not as specified.
Contents (unit packages and shipping containers)	Not quantity specified.
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Packaging shall be level A, B, or C, as specified (see 6.2). (Lead joint runners 10- to 14-inch and larger do not require packaging).

5.1.1 Level A. Twelve lead joint runners, 6- to 10-inch size and smaller shall be packaged in a fiberboard box conforming to PPP-B-636, class weather-resistant. Closure and weatherproofing of the box shall be in accordance with the appendix to PPP-B-636.

5.1.2 Level B. Twelve lead joint runners, 6- to 10-inch size and smaller shall be packaged in a fiberboard box conforming to PPP-B-636, class domestic.

5.1.3 Level C. Lead joint runners shall be packaged in accordance with the supplier's normal practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Lead joint runners, 6- to 10-inch size or smaller, packaged as specified in 5.1, or unpackaged lead joint runners 10-to 14-inch size and larger shall be packed in a fiberboard box conforming to PPP-B-636, class weather-resistant, or PPP-B-640, class 2.

5.2.2 Level B. Four unit packages of lead joint runners 6- to 10-inch size and smaller, or twelve unpackaged lead joint runners 10- to 14-inch size and larger shall be packed in a fiberboard box conforming to PPP-B-636, class domestic.

5.2.3 Level C. Lead joint runners, packaged as specified in 5.1, shall be packed to assure carrier acceptance and safe delivery to destination at lowest rates, in containers complying with the Uniform Freight Classification or National Motor Freight Classification Rules, as applicable.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2, as specified (see 6.2).

5.3.1 Civil agencies. In addition to any special markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special markings required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following data in procurement documents;

(a) Title, number, and date of this specification.
(b) Size required (see table I).
(c) Selection of applicable level of packaging and packing required (see 5.1 and 5.2).
(d) Marking required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the currentversion before use.