GGG-S-1408A
March 15, 1973
SUPERSEDING
Fed. Spec. GGG-S-001408(GSA-FSS)
June 11, 1968 and
MIL-S-19106C
22 December 1965

FEDERAL SPECIFICATION

SCREWDRIVER, RATCHET, RIGHT ANGLE OFFSET, RIGHT AND LEFT HAND TURNING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers right angle offset, ratcheting screwdrivers, right-and left-hand turning, with removable bits, and with integral bits.

1.2 Classification. The screwdriver handles and bits shall be of the following types, classes, and sizes as specified (see 6.2):

Type I - Screwdriver, offset, ratcheting for removable bits.

Type II - Bits.

Class 1 - Flat tip.
Class 2 - Crosspoint (Phillips).
Class 3 - Crosspoint (Reed and Prince).
Class 4 - Hexagonal key.
Class 5 - Square key.

Type III - Screwdriver, reversible, offset, ratcheting, with integral bits.

Class 1 - Flat tip.
Class 2 - Crosspoint (Phillips) tips.
Class 3 - Crosspoint (Phillips, Reed and Prince) tips.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Type IV - Screwdriver, nonreversible, offset, ratcheting, with integral flat tips.

Type V - Screwdriver kit, offset, ratcheting handle w/removable bits.

Size 1 - With four bits (see 3.10.1).
Size 2 - With six bits (see 3.10.2).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-P-40 - Packaging and Packing of Hand Tools.

Federal Standard:

FED-STD-123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC , Atlanta, Chicago, Kansas City, MO , Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing of Materials (ASTM) Standard:

E18-68 - Method of Test for Rockwell Hardness and Rockwell Superficial Hardness of Metal Materials

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Screw Research Association Drawing

PD-9 - Phillips Screwdriver and Bit Point Dimensions (1, 2, 3, and 4 point)

(Application for copies should be addressed to the Screw Research Association, 8 Mercer Road, Natick, MA 01760).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification, and are not intended to preclude the purchase of screwdrivers or bits which are otherwise in accordance with this specification.

3.2 Standard product. The screwdrivers delivered under this specification shall be the manufacturer's commercial product, except for any changes necessary to comply with specification requirements. All like items furnished on any one contract, including parts and subassemblies thereof, shall be new and interchangeable.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.


3.2.1 Materials. Materials not definitely specified shall be of the quality normally used by the manufacturer for offset, ratcheting screwdrivers, provided the completed item complies with all the provisions of this specification.

3.3 Marking. Handles shall be marked in a legible and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.


3.4 Finish. Screwdrivers, bits, and handles shall be free from burrs, roughness, and excessive oxide scale, and shall have a lacquered, enameled coated, or plated (except that cadmium plating shall not be allowed) finish conforming to good manufacturing practices.

3.5 Sets. Sets of screwdrivers shall consist of a handle and the required bits (see 3.10 and 6.2). All items contained in the sets shall conform to the requirements for the respective items covered in this specification. Sets of type I and V screwdrivers shall be provided with either a carrying roll or a box. When a roll is provided, it shall be of vinyl plastic with transparent pockets for holding the components and be secured with snaps or ties. When a box is provided, it shall be of metal or plastic, or a combination of metal and plastic with partitions for holding the components, and a cover having a positive or friction type catch.

3.6 Type I, screwdriver, offset, ratcheting for removable bits. The type I screwdriver shall consist of a handle with a socket and a ratchet mechanism in one or both heads. Handles shall be fabricated of steel and provide a comfortable handgrip. The length of the handles shall be not less than 3-1/4 inches, measured from the center of the socket to the end of the handles. Unless otherwise specified (see 6.2), handles shall be similar to option A or B of figure 1 at the option of the supplier.



Option A



Option B

FIGURE 1. Type I, screwdriver, handle, offset, ratchet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.6.1 Ratchet mechanism. The ratchet mechanism shall be of tough, wear-resistant metal of sufficient strength to withstand the test loads (see 4.4.2.1) without affecting its operation. The ratchet shall be located in the head of the handle, and all cover plates or retaining devices shall be secured in a manner to minimize loosening during usage. Ratchets may be reversible and shall be capable of ratcheting in both the tightening and loosening operations or ratcheting in one direction, with reversing action obtained by turning over handle.

3.6.2 Sockets. The sockets shall be capable of receiving screwdriver bits hereinafter specified (see 3.7.1, 3.7.2, 3.7.3, 3.7.4, and 3.7.5). The sockets shall be so designed to allow the socket to rotate without binding. The sockets shall have 1/4- or 5/16-inch hexagonal openings, as specified (see 6.2), and shall be of properly heat-treated high grade steel. The corners of the adapter engaging surfaces shall be well-defined. Sockets shall have a minimum of eight ratchet teeth in order to assure ratcheting with a handle swing of 45° or less.

3.7 Type II, bits. Type II bits shall have 1/4- or 5/16-inch hexagonal bodies, as specified (see 6.2), capable of being inserted into sockets of type I handles (see 3.6.2). Bits shall be firmly and securely retained by a mechanical means incorporated in the hexagonal bit body. The bits shall fit loose enough to be inserted and removed by hand, and tight enough not to fall freely from the socket when the handle is held in a horizontal position. Bits shall be single tipped with a knurled or serrated spinner on the opposite end. The overall length of the bits shall not exceed 1-5/8 inches. Bits shall be hardened to Rockwell C-48 to C-55. This reading shall be taken as near the tip end as possible (see 4.4.1).

3.7.1 Type II, class 1, flat tip bits. Class 1 bits shall be flat tip and in accordance with the requirements of 3.7. They shall comply with the requirements in table I and be similar to figure 2.

TABLE I. Screwdriver bits, flat tip

Width of tip at end	Thickness of tip at end	Length of tip	Torsional moment
±1/32	±0.005	Min.	Min.
Inch	Inch	Inch	Inch-Pounds
1/4	0.037	3/8	60
3/8	.050	3/8	125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

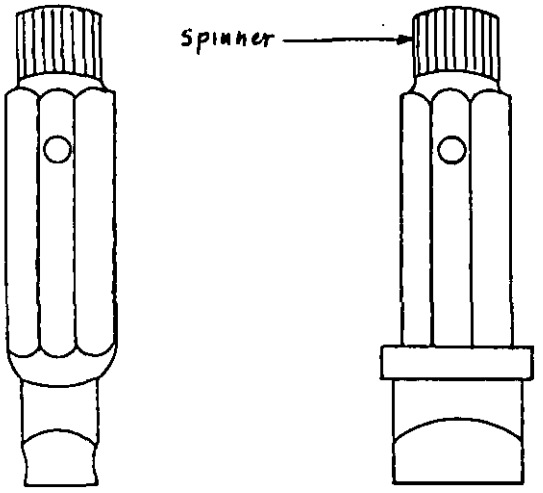


FIGURE 2. Type II, class 1, screwdriver bit, flat tip.

3.7.2 Type II, class 2 crosspoint (Phillips). Class 2 crosspoint (Phillips) bits shall conform to the requirements of 3.7, except the tips shall be similar to figure 3 and shall conform to Screw Research Association Drawing PD-9 for Phillips screwdrivers and bit point dimensions. Phillips crosspoint bits shall be furnished in point numbers 1, 2, 3, and 4, as specified (see 6.2). Class 2 bits shall comply with the torsional moment requirements of table II, when tested as specified in 4.4.2.2.




FIGURE 3. Type II, class 2, screwdriver bit, crosspoint (Phillips).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE II. Class 2, crosspoint bits (Phillips)

Point number	Torsional moment Inch-pounds
1	25
2	60
3	100
4	125

3.7.3 Type II, class 3, crosspoint (Reed and Prince). Class 3 bits shall conform to the requirements of 3.7 except that the point dimensions shall conform to the requirements shown on Screw Research Association Drawing PD-9 for Reed and Prince screwdriver point dimensions. Class 3 bits shall be furnished in point sizes of 1/4 and 5/16 inch, as specified (see 6.2). Class 3 bits shall comply with the torsional moment requirements of table III and be similar to figure 4.




FIGURE 4. Type II, class 3, screwdriver bit, crosspoint (Reed and Prince).

TABLE III. Class 4, crosspoint bits (Reed and Prince)

Size of Hexagonal body	Torsional moment
Inch	Inch-pounds
1/4	90
5/16	125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.7.4 Type II, class 4, hexagonal key. Class 4 bits shall conform to 3.7, except that they shall be suitable for driving or loosening hexagonal socket head screws and shall be hardened to Rockwell C-48 to C-55. The reading shall be taken within 1/4 inch from the tip end (see 4.4.1). The corners on the tip end shall be radiused or chamfered to break all sharp edges, but not to exceed 1/64 inch. Hexagonal key bits shall conform to table IV and shall be similar to figure 5.

TABLE IV. Type II, class 4, bits, hexagonal key

Size (distance across flats) (A) +0.000 -0.002	Length of tip (B) Minimum	Torsional moment Minimum
Inch	Inch	Inch-pounds
0.050	1/4	3
1/16	1/4	4
5/64	1/4	10
3/32	1/4	15
7/64	1/4	20
1/8	1/4	25
9/64	1/4	35
5/32	1/4	50
3/16	5/16	70
7/32	5/16	125
1/4	5/16	125
5/16	5/16	125

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the current version before use.

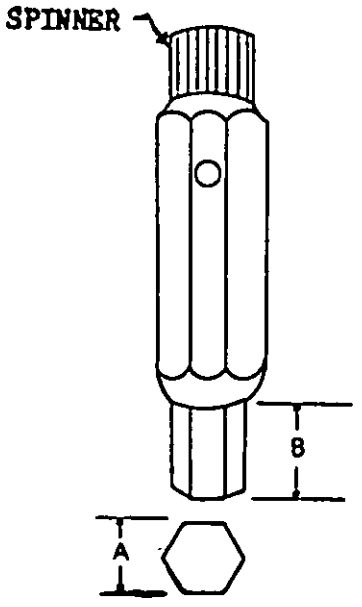


FIGURE 5. Type II, class 4, hexagonal key.

3.7.5 Type II, class 5, square key. Class 5 bits shall conform to 3.7 except they shall be hardened to not less than 48 nor more than 55 on the Rockwell C scale; the reading shall be taken within 1/4 inch of the tip end (see 4.4.1). The corners on the tip end shall be free of burrs. The square end shall be 1/4 inch +0.000, -0.002 inch across the flats and shall be 1/4 inch long (minimum). Bits shall be capable of withstanding a torsional moment of 125 inch-pounds. Class 5 bits shall be similar to figure 6.

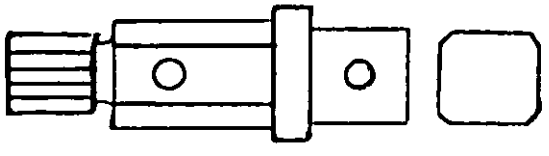


FIGURE 6. Type II, class 5, bit, square key.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

3.8 Type III screwdriver, offset, ratcheting with integral bits (reversible). Type III, offset ratcheting screwdrivers shall consist of a handle with reversible ratcheting mechanism and a double-end nonremovable bit. Type III offset ratchet screwdrivers shall be furnished in class 1 with flat tips, class 2 with Phillips bits, and class 3 with a Phillips and Reed and Prince bit.

3.8.1 Class 1, flat tip. Type III, class 1, offset ratcheting screwdrivers shall be similar to figure 7 and shall comply with table V for the size specified (see 6.2). Class 1 handles shall be fabricated of steel and shall contain a ratcheting mechanism and means of changing direction of bit rotation and ratchet operation. Design shall be such that the screwdriver bit is held securely in place and yet allowed to rotate without binding. Handles shall be capable of withstanding the bending load specified for type I handles. Bits shall be hardened to Rockwell C-48 to C-55. Overall length of bits shall not exceed 1 inch.




FIGURE 7. Type III, class 1, screwdriver, ratcheting, offset, flat tip.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE V. Type III, class 1, screwdriver, offset, flat tip

Size number	Tip width		Tip thickness		Overall length ±1/8	Torsional moment (Min.)	
	Small end ±1/32	Large end ±1/32	Small end ±0.005	Large end ±0.005		Small end	Large end
	Inch	Inch	Inch	Inch	Inches	Inch-pounds	Inch-pounds
1	1/4	3/8	0.037	0.050	3-1/2	60	125
2	3/8	7/16	0.050	0.060	4-3/8	125	125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.8.2 Class 2 crosspoint Phillips. Class 2 offset screwdrivers shall comply with the requirements for class 1 except that the bits shall be double end Phillips type and the overall length of the bits shall not exceed 1-5/8 inches. Phillips point dimensions shall conform to the requirements of type I Phillips bits. Class 2 screwdrivers shall be similar to figure 8 and conform to table VI for the size specified (see 6.2).

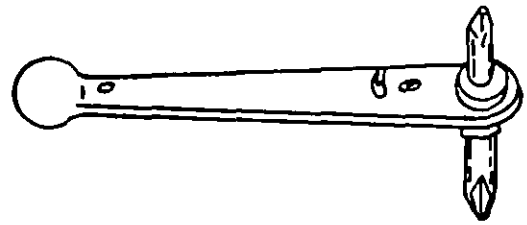


FIGURE 8. Type III, screwdriver, ratcheting, offset, crosspoint (Phillips).

TABLE VI. Type III, class 2 screwdriver, ratcheting offset, crosspoint (Phillips)

Size number	Phillips point number		Overall length maximum	Torsional moment (min.)	
	Small end	Large end		Small end	Large end
			Inches	Inch-pounds	Inch-pounds
1	1	2	3-13/16	33	60
2	2	3	3-13/16	60	100

3.8.3 Class 3 crosspoint Phillips and Reed and Prince. Class 3 offset ratchet screwdrivers shall comply with the requirements for class 2, size 1, except the small end bit shall be Reed and Prince 1/4-inch point and the torsional moment (min.) for the small end shall be 90 pounds. Class 3 offset ratchet screwdrivers shall be similar to figure 9.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the current version before use.

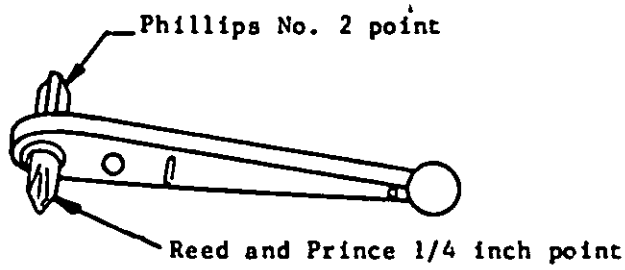


FIGURE 9. Type III, class 3, screwdriver, offset, ratchet, crosspoint (Phillips and Reed and Prince).

3.9 Type IV, screwdriver, offset ratcheting with integral bits nonreversible). Type IV nonreversible, offset, ratcheting screwdrivers shall consist of a handle with a nonreversible ratcheting mechanism and a double end nonremovable bit. Type IV screwdrivers shall comply with the dimensions of, and be similar to figure 10.

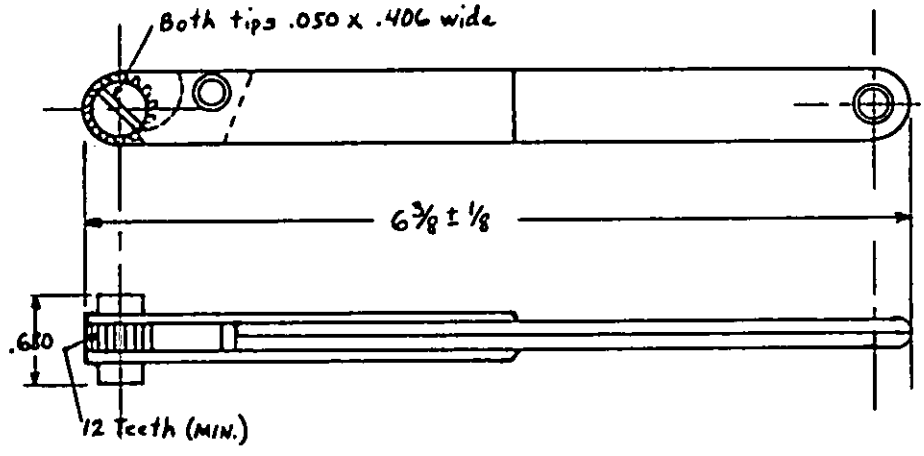


FIGURE 10. Type IV, nonreversible, offset ratcheting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.10 Type V - offset, ratcheting screwdriver with removable bits. The screwdriver bit set and ratchet handle shall be as specified hereinafter and shall be contained in a plastic roll.

3.10.1 Size 1. Size 1 shall consist of one type I, ratchet handle and four removable bit sizes as follows:

1/4 inch wide flat tip bit
3/8 inch wide flat tip bit — Type II, class 1
No. 1 Phillips bit
No. 2 Phillips bit — Type II, class 2

3.10.2 Size 2. Size 2 shall consist of one type I ratchet handle and six removable bit sizes as follows:

1/4 inch wide flat tip bit
3/8 inch wide flat tip bit — Type II, class 1
No. 1 Phillips bit
No. 2 Phillips bit
No. 3 Phillips bit — Type II, class 2
No. 4 Phillips bit

3.11 Workmanship. Handles, bits, and boxes shall be smoothly finished and free from rust, oxide scale, forge flash marks, fins, burrs, pits, cracks, tears, blisters, nodules, external rough edges, corners, or surfaces, and any defects which may impair their serviceability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as set forth below.

4.3 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, figures and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 End item inspection. The inspection lot shall be expressed as the number of screwdrivers of one type, size and class offered for inspection at one time.

4.3.2.1 Visual examination. Examination of the screwdrivers shall be in accordance with the classification of defects in table VII. The inspection level shall be II and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

TABLE VII. Classification of defects

Examine	Defects
Finish	Not as specified in 3.4.
Design	Not similar to applicable figure.
Workmanship	Not as specified in 3.11.
Construction	Bit missing or not as specified. Handle missing or not as specified. Carrying roll or box, when required, missing or not as specified in 3.5.
Marking	Missing, incomplete, illegible, or not permanent.

4.3.2.2 Dimensional examination. The screwdriver shall be examined for compliance with dimensions and weight specified. Any dimension or weight not within tolerance shall be a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the currentversion before use.

4.3.2.3 End item testing. The screwdriver handle and bits shall be tested as specified in 4.4.1, 4.4.2.1, and 4.4.2.2, as applicable. The inspection level shall be S-1 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

4.3.3 Examination of preparation for delivery. Examination of preparation for delivery shall be in accordance with PPP-P-40.

4.4 Tests.

4.4.1 Hardness test. All surfaces shall be suitably ground for the test to remove plating, and decarburization. The Rockwell hardness tests shall be conducted in accordance with ASTM E18-678 to determine conformance to the hardness specified for type I flat tip bits and type III, class 1 bits. Failure to comply with the requirements in 3.7 and 3.8.1 shall constitute failure of this test.

4.4.2 Application for test loads. Test loads shall be applied either with suitable torque-producing machines, suitable lever with dead weights, or testing machine. The load shall be applied for 10 seconds and then removed. Care shall be exercised to maintain accuracy in applying the load and in measuring the effective lever arm through which the load acts.

4.4.2.1 Bending moment test (handles). Each sample screwdriver handle having a 1/4 hexagonal socket shall be subjected to a bending moment test of 110 inch-pounds and handles having a 5/16 hexagonal socket subjected to a bending moment of 125 inch-pounds. The load shall be applied on the handle, at right angles to the centerline of the handle, and as far from the bit as is practicable. The bending moment shall be the product of the effective lever arm, in inches and the applied load in pounds. The effective lever arm, when the centerline of the handle is horizontal, is the shortest distance, in inches, between two vertical lines passing, respectively, through the point of load application and the center of the mandrel fitting the socket opening. After application of the bending moment, screwdriver handles shall be examined for any indications of permanent set, cracks, flaws or damage to the ratchet mechanism, ratchet reverse control, if furnished, or pawl engaging surfaces. Nonconformance to 3.6.1 and 3.9.1 shall constitute failure of this test.

4.4.2.2 Torsional moment test (bits). Each sample screwdriver bit shall be subjected to a torsional moment test conforming to the applicable requirements for the bit tested. The load shall be applied to an arm, bar, or clamp secured to the bit with the blade tip held securely in a fixture suitable for the bit tested and shall act at right angles to the longitudinal axis of the bit. The torsional moment shall be the product of the effective lever arm, in inches, and the applied load, in pounds. The effective lever arm is the

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the current version before use.

distance, in inches, from the longitudinal axis of the tool to the point where the load is applied and at right angles to the direction in which the load is applied. After application of the torsional moment, bits shall not fail or show visual indications of weakness of any nature, such as permanent set, distortion, cracks, or slipping of the bits. Nonconformance to 3.7, 3.7.2, 3.7.3, 3.7.4, 3.7.5, 3.8.1, 3.8.2, and 3.8.3 shall constitute failure of this test.

4.4.2.2.1 Fixtures for testing screwdriver bits. Each sample screwdriver bit shall be tested in a fixture having in its center the corresponding form and size of recess as the bit point being tested. The recess for the applicable fixture shall be as follows:

a. The fixture for flat tip points shall be slotted to a depth not greater than the thickness of the blade plus the respective positive tolerance permitted. The slot width shall not exceed the nominal tip thickness +0.008 inch (see table I).

b. The recess in the fixture for Phillips and Reed and Prince type points shall be of such depth that the wing spread at the surface shall be as follows:

Phillips point size number	Wing-spread
	Inch
1	0.142
2	.233
3	.386
4	.486

Reed and Prince blade size	Wing-spread
Inch	Inch
0.250	0.250
.312	.312

c. The recess in the fixture for hexagonal key type bits shall conform to the dimensions of the recess in the applicable commercial type screw head for which the bit is designed to drive (see table IV).

4.5 Inspection of preservation, packaging, packing, and marking for shipment and storage. Preservation, packaging, packing, and marking for shipment and storage shall be examined to determine conformance to the documents referenced in section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Preservation, packaging, and packing shall be in accordance with PPP-P-40. Levels of preservation, packaging, and packing shall be as specified (see 6.2).

6. NOTES

6.1 Intended use. Offset ratcheting screwdrivers covered by this specification are intended for use by mechanics for tightening and loosening slotted head, cross recess head, and hexagonal socket screws in restricted spaces.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type I sets required (handle option, class of bits and sizes) (see 1.2, 3.6, 3.6.1, 3.6.2 and applicable tables).
(c) Handle socket-sizes (1/4 or 5/16 inch) when ordering type I, screwdrivers (see 1.2 and 3.6.2).
(d) Type II bit body size(s) (1/4 inch or 5/16 inch) and classes (1, 2, 3, 4, or 5) when ordering for handle (c) above.
(e) Point number for type II, class 2 bits (see 3.7.2).
(f) One fourth or 5/16 inch point size for type II, class 3 (see 3.7.3).
(g) Size (distance across flats) of hexagonal end (see table IV).
(h) Type III, classes and sizes required (see 3.8.1, 3.8.2, and 3.8.3).
(i) If type IV is required (see 3.9).
(j) Type V size of kit required (see 3.10).
(k) Applicable levels of preservation, packaging, and packing (see 5.1)

6.2.1 When ordering repair parts, individual bits, or other procurable parts, the following should be specified:

(a) Manufacturer's name or trademark of screwdriver for which the parts are required.
(b) The name and quantity of the part required.
(c) Size of socket opening required in handle (see 3.6.2).
(d) Class and size of adapters (see 3.7.1, 3.7.2, 3.7.3, 3.7.4, and 3.7.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

6.3 Supersession data. This specification includes all the requirements of Military Specification MIL-S-19106C.

MIL-S-19106C	GGG-S-1408A
Type I - Size 1	Type V - Size 1
Type I - Size 2	Type V - Size 2
Type II - Class 1	Type III - Class 1
Type II - Class 2	Type III - Class 2
Type II - Class 3	Type III - Class 3
3.4.4.1 Bits, crosspoint, Reed and Prince	Type II - Class 3
3.4.4.2 Bits, hexagonal key, for socket head screws	Type II - Class 4

MILITARY CUSTODIANS:

Army - GL
Navy - SH
Air Force - 84

User activities:

Army - AV, ME
Navy - MC

Preparing activity:

Army - GL

Civil Agency Coordinating Activity:

GSA-FSS

Project No. 5120-0701

☆U. S. GOVERNMENT PRINTING OFFICE : 1973 O - 514-178 (435)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION GGG-S-1408A

SCREWDRIVER, RATCHET, RIGHT ANGLE OFFSET, RIGHT AND LEFT HAND TURNING

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the current version before use.