GGG-S-1408A
INTERIM AMENDMENT-2
April 20, 1976
SUPERSEDING
Int. Amendment-1
March 6, 1974

INTERIM AMENDMENT

TO

FEDERAL SPECIFICATION

SCREWDRIVER, RATCHET, RIGHT ANGLE OFFSET,
RIGHT AND LEFT HAND TURNING

This interim amendment was developed by the General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this interim amendment as a valid exception to Federal Specification GGG-S-1408A, dated March 15, 1973.

PAGE 1

Delete "RIGHT AND LEFT HAND TURNING" from the title.

Add new paragraph as follows:

"1.1.1 Federal specification coverage. Federal specifications do not cover all varieties of the commodity indicated by the titles of the specifications, or which are commercially available, but include only those generally used by the Federal Government."

Paragraph 1.2: Delete "Type I - Screwdriver, offset, ratcheting for removable bits." and substitute "Type I - Screwdriver handle."; delete "Class 5 - Square key." under Type II and substitute: "Class 5 - Adapter, socket wrench."; delete "Type IV - Screwdriver, nonreversible, offset, ratcheting, with integral flat tips."; delete "Type V - Screwdriver kit, offset, ratcheting handle w/removable bits." and substitute: "Type V - Screwdriver sets.".

PAGE 2

Paragraph 2.1: Delete "FED-STD-123 - Marking for Domestic Shipment (Civil Agencies)." and substitute "Fed. Std. No. 358 - Sampling Procedures."

PAGE 3

Paragraph 2.2: Add the following reference document in proper sequence:

"American National Standards Institute (ANSI), Inc., Standards:

B107.4 - Driving and Spindle Ends for Portable Hand, Air, and Electric Tools.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)"

Following "American Society for Testing of Materials (ASTM) Standard:", delete "E18-68", and substitute: "E18".

PAGE 4

Paragraph 3.5: Delete in its entirety.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:43Z
Check the source to verify that this is the current version before use.

PAGE 5

Paragraph 3.6.1: Delete first sentence and substitute: "The ratchet mechanism shall be of tough, wear-resistant metal of sufficient strength to withstand a torsional moment load of 90 inch-pounds for handles with a 1/4-inch socket or 125 inch-pounds for handles with a 5/16-inch socket without affecting its operation."

Paragraph 3.7, tenth line: Delete "(see 4.4.1)."

Paragraph 3.7.1: Add after end of first sentence; "for the width of tip specified (see 6.2)."

Table I, fourth column: Change "60" inch-pounds for 1/4-inch size tip width to "40" inch-pounds.

PAGE 6

Paragraph 3.7.2: Delete "when tested as specified in 4.4.2.2." at end of last sentence.

Paragraph 3.7.3, Figure 4, and Table III: Delete and substitute:

"3.7.3 Type II, class 3, crosspoint (Reed and Prince). Class 3 bits shall have hexagonal bodies conforming to the requirements in 3.7 and bit ends similar to figure 4. Dimensions and torsional requirements shall be as specified in table III for the size specified (see 6.2).

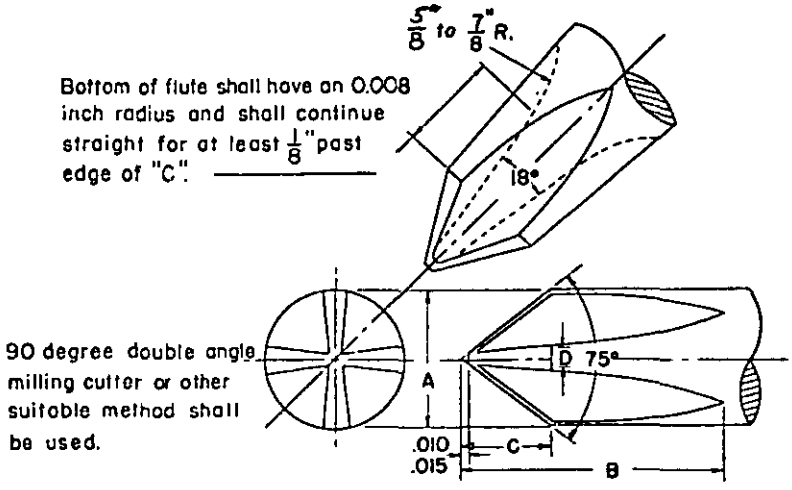


FIGURE 4. Type II, class 3, screwdriver bit, crosspoint (Reed and Prince)

TABLE III. Class 4, crosspoint bits (Reed and Prince)

TIP SIZE (Inch)	HEXAGON BODY SIZE (Inch)	B (Inch)	C (Inch)	D (Inch)
1/4	1/4	9/16	0.163	0.050
5/16	1/4	5/8	0.204	0.060

PAGE 8

Paragraph 3.7.4, third and fourth lines: Delete "and shall be hardened to Rockwell C-48 to C-55. The reading shall be taken within 1/4 inch from the tip end (see 4.4.1)." Add to end of last sentence: "for the size specified (see 6.2)."

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

PAGE 9

Paragraph 3.7.5: Delete and substitute:

"3.7.5 Type II, class 5, adapter, socket wrench. Class 5 adapters shall conform to 3.7 except one end shall have a 1/4-inch square male drive tang in accordance with ANSI B107.4 square drive specifications for hand wrenches. The adapter shall be capable of withstanding a torsional moment of 125 inch-pounds, and shall be similar to figure 6."

PAGE 10

Paragraphs 3.8 and 3.8.1: Delete and substitute:

"3.8 Type III screwdriver, offset, ratcheting with integral bits (reversible). Type III, offset ratcheting screwdrivers shall consist of a steel handle with reversible ratcheting mechanism and a double-end nonremovable bit. The design shall be such that the screwdriver bit is held securely in place and yet allowed to rotate without binding. Handles shall be capable of withstanding the torsional moment loads specified in table V, VI, or paragraph 3.8.3, as applicable. Bits shall be hardened to Rockwell C48 to 55.

3.8.1 Class 1, flat tip. Type III, class 1 offset ratcheting screwdrivers shall be similar to figure 7 and comply with table V for the size specified (see 6.2). Overall length of bits shall not exceed 1 inch."

PAGE 11

Table V, sixth column: Delete "3-1/2" and "4-3/8" and substitute "3-3/4" and "4-3/4", respectively, and change tolerance from "± 1/8" to "± 1/4"; and in seventh column, change "60" inch-pounds load for size number 1 small end to "40" inch-pounds.

PAGE 12

Table VI, fourth column: Delete "3-13/16" for sizes 1 and 2 and substitute "3-3/4", and change "Overall length maximum" to "Overall length, ± 1/4".

PAGE 13

Paragraph 3.9 and figure 10: Delete. (No replacement paragraph).

PAGE 14

Paragraph 3.10: Delete and substitute:

"3.10 Type V screwdriver sets. Type V screwdriver sets shall consist of a type I handle and an assortment of screwdriver bits. All items contained in the sets shall conform to the requirements for the respective items covered in this specification, and be furnished in a metal or plastic box, or plastic envelope or roll. When a box is provided, it shall have compartments for each component and a cover with a positive or friction type catch. If an envelope or roll is provided, it shall have a flap with snap fastener or attached tie for keeping the components contained. Sets shall be furnished in size 1 or size 2, or as otherwise specified (see 6.2)."

PAGES 15, 16 and 17

Delete entire pages, and substitute:

"4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with FED-STD-358, except as specified in 4.4.

4.3 Testing. Each sample unit shall be tested in accordance with 4.3.1 and 4.3.2, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

PAGES 15, 16 and 17 (con.)

"4.3.1 Hardness test. Test surfaces shall be suitably ground to remove plating and decarburization. Rockwell hardness test shall be conducted in accordance with ASTM E18 to determine conformance to the specified hardness, as applicable.

4.3.2 Torque test. Screwdrivers and bits shall be subjected to a torsional moment for at least 10 seconds to determine resistance of bits to twist, and handles and ratchet mechanisms to resist distortion, permanent set, or other weakness that would adversely affect serviceability. Test loads, as specified in the applicable table, shall be applied either with suitable torque-producing machines, suitable lever with dead weights, or other means which maintain accuracy in applying and measuring test loads.

4.3.2.1 Handles. Handles without bits, shall be tested by applying a rotary-direction load as near the end of the handle as practical while the bit end is mounted on a stationary mandrel or screwdriver bit. Handles which become distorted or separated during the test, or have unserviceable ratchet mechanisms after completion of the test shall be considered defective.

4.3.2.2 Screwdriver bits. Screwdriver bits shall be tested by applying a rotary-direction load on the shank of the bit while the working end of the bit is held secure in a recess of the proper design for the style bit being tested. During and after completion of the test, bits shall not indicate any distortion or cracks which would render the bits unfit for use.

4.3.2.3 Screwdrivers with integral bits. Screwdrivers with integral bits shall be tested as a single unit with the working end of the bit secured in a suitable recess, and the applicable load applied near the opposite end of the handle. Failure of either the bit or the handle as outlined above shall be considered a defect.

4.4 Examination of preparation for delivery. Examination of preparation for delivery shall be in accordance with PPP-P-40.

PAGE 18

Paragraph 5.1: Add "and marking shall be as specified (see 6.2)." to end of paragraph.

Paragraph 6.2: Delete and substitute:

"6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and sizes required (see 1.2).
(c) Handle style option, when required (see 3.6).
(d) Hexagonal opening size for handle socket (see 3.6.2).
(e) Hexagonal body size for bit (see 3.7).
(f) Width of tip for type II, class 1 bits (see 3.7.1).
(g) Point number for type II, class 2 bits (see 3.7.2).
(h) Tip size for type II, class 3 bits (see 3.7.3).
(i) Size (distance across flats) of type II, class 4 bits (see 3.7.4).
(j) Size number of type III, class 1 screwdriver (see 3.8.1).
(k) Size number of type III, class 2 screwdriver (see 3.8.2).
(l) Size number of set or list of components to be furnished, as applicable for type V sets (see 3.10).
(m) Applicable levels of preservation, packaging, and packing (see 5.1).
(n) Marking required (see 5.1)."

PAGE 19

Add new paragraph 6.4 as follows:

"6.4 Type IV screwdrivers are nonstandard, replaced by type III, class 1, size 2 screwdrivers."

GSA DC 76-9846

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.