MIL-B-3628 / 10B
31 October 1969

SUPERSEDING
MIL-B-3628/10A
30 June 1967

MILITARY SPECIFICATION SHEET


Badge, Qualification, NATIONAL PISTOL SHOT, NAVY; Pendant and Suspension Bar

This specification is mandatory for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.



DASH NO.

-1: GOLD
-2: SILVER
-3: BRONZE

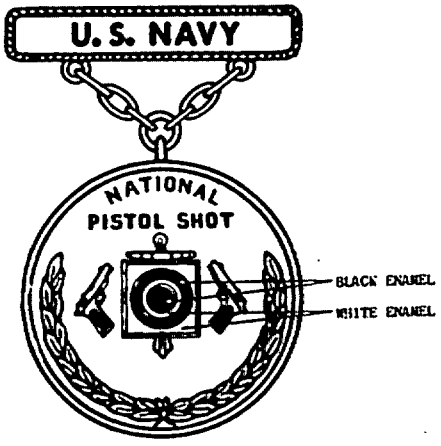

MATERIAL:
-1: PENDANT, SUSPENSION BAR AND LINKS: 14 KARAT GOLD
-2: PENDANT: .990 FINE SILVER
SUSPENSION BAR AND LINKS: STERLING SILVER
-3: PENDANT, SUSPENSION BAR AND LINKS: GILDING METAL

DIMENSIONS (INCHES):
PENDANT:
DIAMETER: 1.321 (REF)
THICKNESS (AT EDGE):
-1, -2: .085 (REF)
-3: .085 (+.010, -.000)
SUSPENSION BAR:
HEIGHT (INCLUDING LUGS): 3/8 (REF)
WIDTH (OVERALL): 1-7/16 (REF)
THICKNESS (AT EDGE): .080 (+.010, -.000)

WEIGHT (ASSEMBLED):
-1: 529 GRAINS (MIN)
-2: 361 GRAINS (MIN)
-3: N/A

FINISH:
PENDANT:
OBVERSE: TARGET ENAMELED, HIGHLIGHTS AND RIM POLISHED
REVERSE: MIRROR-LIKE POLISHED
SUSPENSION BAR:
OBVERSE: HIGHLIGHTS AND RIM POLISHED
REVERSE: MIRROR-LIKE POLISHED

NOTES:
1. PENDANT THICKNESS FOR DASH NOS. 1 AND 2 IS GIVEN FOR INFORMATION PURPOSES ONLY. ASSEMBLED WEIGHT GOVERNS.

2. THE PENDANT LUGS SHALL BE FABRICATED FROM .044 INCH NOMINAL DIAMETER WIRE OF THE SAME BASE MATERIAL AS THE PENDANT. THE LUG SHALL HAVE A MINIMUM OUTSIDE DIAMETER OF 5/32 INCH AND SHALL BE SOLDERED TO THE PENDANT.

3. SUSPENSION LINKS SHALL BE 5/32 INCH IN WIDTH BY 3/16 INCH IN LENGTH AND FABRICATED FROM .044 INCH NOMINAL DIAMETER WIRE.

4. JUMP RINGS SHALL BE FABRICATED FROM .044 INCH NOMINAL DIAMETER WIRE OF THE SAME MATERIAL AS THE SUSPENSION BAR. THE RINGS SHALL HAVE AN OUTSIDE DIAMETER OF 3/16 PLUS OR MINUS 1/32 INCH.

5. ATTACHING DEVICE SHALL BE PIN AND CATCH TYPE. THE HINGE AND ROTORY CATCH SHALL BE CENTERED ON THE SUSPENSION BAR. THE PIN STEM SHALL BE 1-11/32 INCHES IN LENGTH. THE ATTACHING DEVICE SHALL BE FABRICATED FROM NICKEL SILVER.

6. ENAMEL SHALL BE BLACK AND WHITE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS OF THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIPS LISTED BELOW:

COLOR	CHIP NO.
WHITE	28
BLACK	26

7. THE SUSPENSION BAR SHALL HAVE TWO INTEGRAL LUGS. THE LUGS SHALL BE EQUIDISTANT FROM THE ENDS AND 13/16 INCH ON CENTERS.

CUSTODIAN:
NAVY - PE
REVIEW ACTIVITY:
NAVY - PE
OTHER - DP

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY,
UNITED STATES ARMY

Project No. 8455-0131

Source: https://assist.dla.mil -- Downloaded: 2026-10-31T17:48:48Z
Check the source to verify that this is the current version before use.