NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/10K
23 September 2024
SUPERSEDING
MIL-DTL-3628/10J
22 November 2019

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, NATIONAL PISTOL SHOT, NAVY, PENDANT AND SUSPENSION BAR

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

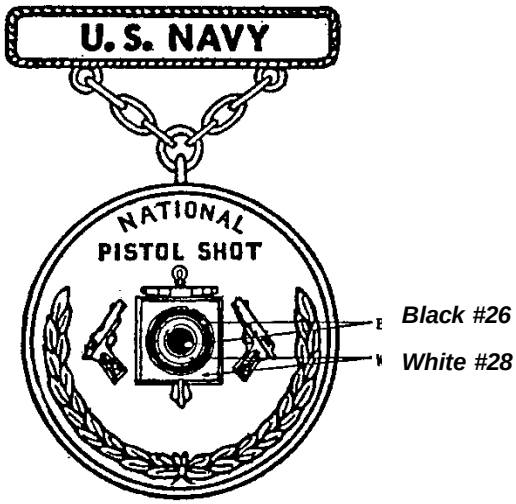

DASH NO.
-1: Gold
-2: Silver
-3: Bronze

MATERIAL:
PENDANT: Gilding Metal 95/5/(UNS Alloy No. C-210)
SUSPENSION BAR:
-1, -2: Red Brass 85/15 (UNS Alloy No. C-230)
-3: Gilding Metal 95/5/(UNS Alloy No. C-210)

FINISH:
PENDANT:
OBVERSE:
-1: Epoxy resin, 24K Gold Plated, Matte Finish, Highlights and Rim Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:48Z
Check the source to verify that this is the current version before use.

-2: Epoxy resin, Nickel Plated, Silver Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 13.

-3: Highlights and Rim Polished.

REVERSE:

-1: 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

-2: Nickel Plated, Silver Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

-3: Mirror-like Polished.

SUSPENSION BAR:

OBVERSE:

-1: 24K Gold Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 8.

-2: Nickel Plated, Silver Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 13.

-3: Highlights and Rim Polished.

REVERSE:

-1: 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

-2: Nickel Plated, Silver Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

-3: Mirror-like Polished.

DIMENSIONS:

PENDANT:

DIAMETER: 1-5/16 inches (REF)

THICKNESS (At edge): 0.085 inch + .010 inch

SUSPENSION BAR:

HEIGHT (Including lugs): 3/8 inch (REF)

WIDTH (Overall): 1-7/16 inches (REF)

THICKNESS (At edge): 0.080 inch $\pm$ .010 inch

ATTACHING DEVICE:

1. The attaching device shall be prong and flat ball clutch type.

2. Nickel plated flat ball clutches shall be used for -2 and brass flat ball clutches shall be used for -1 and -3. The prongs shall be located on the horizontal center line of the suspension bar, equidistant from each end and 1-11/32 inches $\pm$ 1/32 inch apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:48Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26
White	#28

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

4. The lug (suspension ring) for the pendant shall have a minimum outside diameter of 5/32 inch ± 1/64 inch and wire thickness shall have a nominal thickness of 0.050 inch. The lug shall be soldered at the top of the pendant vertical center line.

5. Suspension links shall be 5/32 inch ± 1/64 inch in width by 3/16 inch ± 1/64 inch in length and fabricated from 0.050 inch nominal diameter wire with the same material and finish as the pendant and suspension bar.

6. Jump rings shall be fabricated from 0.050 inch nominal diameter wire with the same material and finish as the suspension bar. The rings shall have an outside diameter of 3/16 ± 1/32 inch.

8. The suspension bar shall have two integral lugs. The lugs shall be equidistant from each end and 13/16 inch ± 1/64 inch on centers.

9. The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-317)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:48Z
Check the source to verify that this is the current version before use.