NOT MEASUREMENT SENSITIVE


MIL-B-3628/12D
9 August 1991
SUPERSEDING
MIL-B-3628/12C
10 February 1988

MILITARY SPECIFICATION SHEET

Badge, Qualification, Pistol Shot, Navy; and Pendant Suspension Bar

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

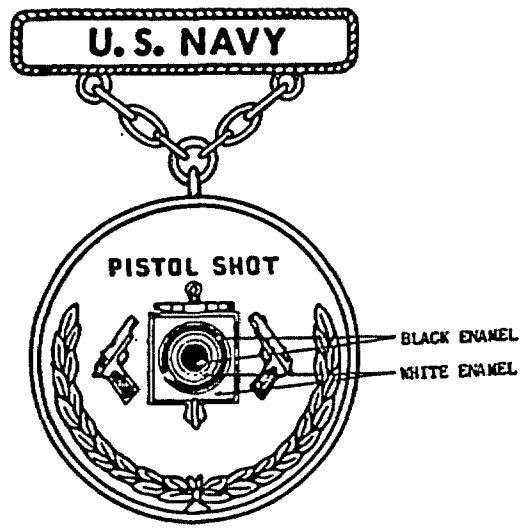

MATERIAL: Pendant, Suspension Bar:
-1: 1/10 10 karat gold filled (1/20 obverse, 1/20 Reverse over comm'l brass alloy)
-2: 1/10 Silver filled (1/20 obverse, 1/20 reverse over comm'l brass alloy)
-3: Gilding Metal

DASH NO.
-1: Gold
-2: Silver
-3: Bronze

DIMENSIONS:
PENDANT:
DIAMETER: 1-5/26 inch (3.33 cm) (REF)
THICKNESS (At edge): .085 inch + .010 inch -0 (0.215 cm + 0.025 cm -0)

SUSPENSION BAR:
HEIGHT (Including lugs): 3/8 inch (0.95 cm) (REF)
WIDTH (Overall): 1-7/16 inch (3.65 cm) (REF)
THICKNESS (At edge): .080 inch + .010 inch -0 (0.215 cm + 0.025 cm -0)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:49Z
Check the source to verify that this is the current version before use.

FINISH:
PENDANT:
OBVERSE:
-1: Hard enamel, gold plated, matte finish, highlights and rim polished
-2: Hard enamel, silver plated, matte finish, highlights and rim polish
-3: Highlights and rim polished
REVERSE:
-1,-2,-3: Mirror-like polish

SUSPENSION BAR:
OBVERSE:
-1: Gold plated, matte finish highlights and rim polished
-2: Silver plated, matte finish, highlights and rim polish
-3: Highlights and rim polished
REVERSE:
-1,-2,-3: Mirror-like polish

NOTES:
1. The lug shall have a minimum outside diameter of 5/32 inch (0.40 cm) and wire thickness shall be .044 inch (0.111 cm).

2. Suspension links shall be 5/32 inch (0.40 cm) in width by 3/16 inch (0.48 cm) in length and fabricated from .044 inch (0.111 cm) nominal diameter wire with same material and finish as the pendant bar.

3. Jump rings shall be fabricated from .044 inch (0.111 cm) nominal diameter wire of the same material as the suspension bar. The rings shall have an outside diameter of 3/16 inch $\pm$ 1/32 inch (0.48 cm $\pm$ 0.08 cm).

4. The attaching device shall be a prong and flat ball clutch type fabricated from red brass. White metal flat ball clutches shall be used for Dash No. 2 and brass flat ball clutches shall be used for Dash No. 1 and 3. The prongs shall be located on the horizontal centerline of the suspension bar, equidistant from each end and 1-11/32 inches $\pm$ 1/32 inch (3.41 cm $\pm$ 0.08 cm) apart.

5. Enameled areas shall be as indicated. The color shall conform to the TIOH color chips listed below or the standard sample.

Color	Chip No.
White	28
Black	26

6. The suspension bar shall have two integral lugs. The lugs shall be equidistant from the ends and 13/16 inch (2.06 cm) on centers.

7. The use of any type of plastic packaging material is prohibited.

Custodian:
Army - IH
Navy - NU

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Projected No. 8455-N613)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:49Z
Check the source to verify that this is the current version before use.