

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, EXCELLENCE, SMALL ARMS COMPETITION, RIFLE AND PISTOL, ARMY; PENDANT, SUSPENSION BAR AND SUSPENSION DEVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

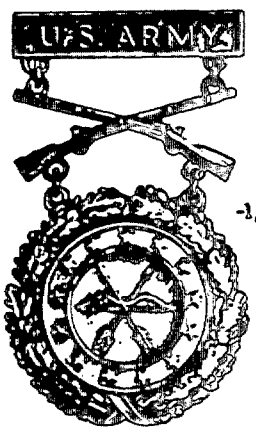


-1, -2

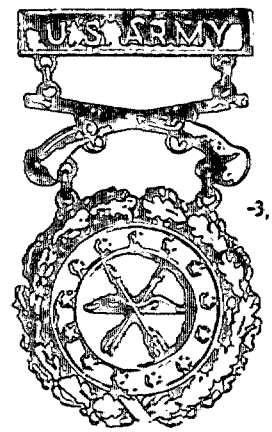


-3, -4




-7, -8






-9, -10



-11, -12



-5, -6

DASH NO.

-1:	RIFLE, NATIONAL AND ALL ARMY MATCHES, SILVER
-2:	RIFLE, ARMY AREA MATCHES, BRONZE
-3:	PISTOL, NATIONAL AND ALL ARMY MATCHES, SILVER
-4:	PISTOL, ARMY AREA MATCHES, BRONZE
-5:	PENDANT, NATIONAL AND ALL ARMY MATCHES, SILVER
-6:	PENDANT, ARMY AREA MATCHES, BRONZE
-7:	SUSPENSION BAR, NATIONAL AND ALL ARMY MATCHES, SILVER
-8:	SUSPENSION BAR, ARMY AREA MATCHES, BRONZE
-9:	BADGE CLASP, RIFLE, NATIONAL AND ALL ARMY MATCHES, SILVER
-10:	BADGE CLASP, RIFLE, ARMY AREA MATCHES, BRONZE
-11:	BADGE CLASP, PISTOL, NATIONAL AND ALL ARMY MATCHES, SILVER
-12:	BADGE CLASP, PISTOL, ARMY AREA MATCHES, BRONZE

MATERIAL:

-1,-3,-5,-7,-9,-11:	1/10 SILVER FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)
-2,-4,-6,-8,-10,-12:	RED BRASS

DIMENSIONS (INCHES):

HEIGHT (OVERALL):

-1,-2,-3,-4:	2-1/4 (REF)
-5,-6:	1-1/4 (REF)
-7,-8:	11/32 (REF)
-9,-10,-11,-12:	19/32 (REF)

WIDTH (OVERALL): 1-1/4 (REF)

THICKNESS (AT THICKEST POINT):

-5:	.105 (REF)	-6:	.105, +.010, -.000
-7:	.075 (REF)	-8:	.075, +.010, -.000
-9,-11:	.080 (REF)	-10,-12:	.080, +.010, -.000

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

FINISH:
OBVERSE:
-1,-3,-5,-7,-9,-11: SILVER PLATED, OXIDIZED, RELIEVED, SATIN FINISH
-2,-4,-6,-8,-10,-12: OXIDIZED, RELIEVED, SATIN FINISH
REVERSE: SATIN FINISH

NOTES:

1. THE LUGS ON THE BAR AND THE TOP LUGS ON THE RIFLE AND PISTOL SHALL BE .095 ± .005 INCH ON CENTERS.
2. THE BOTTOM LUGS OF THE RIFLE AND PISTOL CLASPS AND THE LUGS ON THE PENDANT SHALL BE .075 ± .005 INCH ON CENTERS.
3. LUGS SHALL BE .030, +.010, -.000 INCH IN THICKNESS.
4. DIMENSIONS SHOWN FOR LUGS ON DASH NOS. 7 AND 8 ARE TYPICAL FOR LUGS OF ALL COMPONENTS.
5. THE ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. THE PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE OF THE BAR EQUIDISTANT FROM THE ENDS. THE PRONGS SHALL BE 1, +0, -1/32 INCH IN LENGTH.
6. DASH NOS. 5, 6, 7 AND 8 SHALL BE FURNISHED WITH TWO JUMP RINGS ATTACHED.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.