NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/13E
15 November 1996
SUPERSEDING
MIL-B-3628/13D
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXCELLENCE, SMALL ARMS COMPETITION, RIFLE AND PISTOL, ARMY; PENDANT, SUSPENSION BAR AND SUSPENSION DEVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

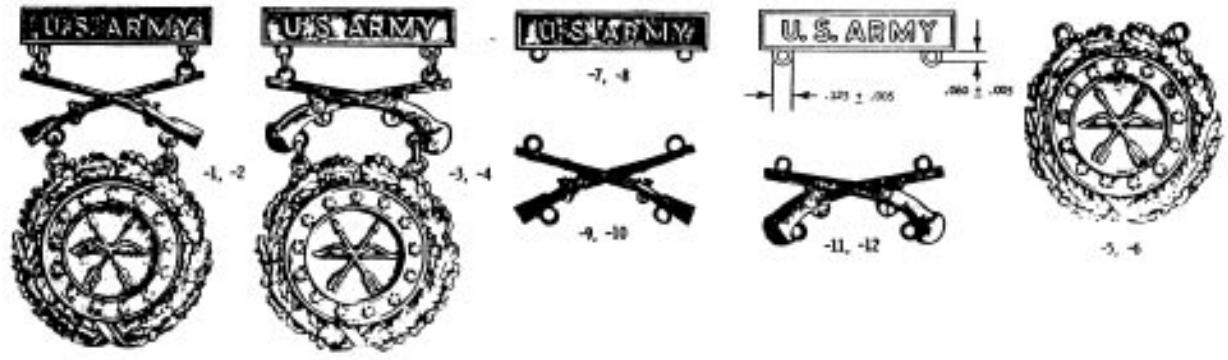

DASH NO.

-1: RIFLE, SILVER, NATIONAL AND ALL ARMY MATCHES
-2: RIFLE, BRONZE, ARMY AREA MATCHES
-3: PISTOL, SILVER, NATIONAL AND ALL ARMY MATCHES
-4: PISTOL, BRONZE, ARMY AREA MATCHES
-5: PENDANT, SILVER, NATIONAL AND ALL ARMY MATCHES
-6: PENDANT, BRONZE, ARMY AREA MATCHES
-7: SUSPENSION BAR, SILVER, NATIONAL AND ALL ARMY MATCHES
-8: SUSPENSION BAR, BRONZE, ARMY AREA MATCHES
-9: BADGE CLASP, RIFLE, SILVER, NATIONAL AND ALL ARMY MATCHES
-10: BADGE CLASP, RIFLE, BRONZE, ARMY AREA MATCHES
-11: BADGE CLASP, PISTOL, SILVER, NATIONAL AND ALL ARMY MATCHES
-12: BADGE CLASP, PISTOL, BRONZE, ARMY AREA MATCHES

MATERIAL: Red Brass

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

FINISH:
OBVERSE:
-1, -3, -5, -7, -9, -11: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
-2, -4, -6, -8, -10, -12: Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 4.
REVERSE:
-1, -3, -5, -7, -9, -11: Nickel Plated, Silver Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 12.
-2, -4, -6, -8, -10, -12: Matte Finish and shall match TIOH Metal Finish Chip Number 2.

DIMENSIONS:
HEIGHT (Overall):
-1, -2, -3, -4: 2-1/4 inches (5.72 cm) (REF)
-5, -6: 1-1/4 inches (3.18 cm) (REF)
-7, -8: 11/32 inch (0.87 cm) (REF)
-9, -10, -11, -12: 19/32 inch (1.51 cm) (REF)

WIDTH (Overall): 1-1/4 inches (3.18 cm) (REF)

THICKNESS (At Thickest Point):
-1 thru -6: 0.105 inch + 0.010 inch - 0 (0.267 cm + 0.025 cm - 0)
-7, -8: 0.075 inch + 0.010 inch - 0 (0.191 cm + 0.025 cm - 0)
-9, -11: 0.080 inch + 0.010 inch - 0 (0.203 cm + 0.025 cm - 0)
-10, -12: 0.080 inch + 0.010 inch - 0 (0.203 cm + 0.025 cm - 0)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. All lugs are integral.

3. Lugs shall be 0.030 inch + 0.010 inch - 0 (0.076 cm + 0.025 cm - 0) in thickness and shall be made with the same material and finish as the pendant and suspension bar.

4. Dash No. -5, -6, -7 and -8 shall be furnished with two jump ring links attached. Links shall be 13/64 inch ± 1/64 inch (0.52 cm ± 0.04 cm) in width and 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) in length and shall be fabricated from 0.044 inch ± 0.005 inch (0.114 cm ± 0.012 cm) diameter wire. The links shall be made with the same material and finish as the pendant and suspension bar.

5. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line of the bar equidistant from each end and 3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm) apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.