INCH-POUND


MIL-DTL-3628/13G
2 June 2016
SUPERSEDING
MIL-DTL-3628/13F
30 November 2015

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, EXCELLENCE IN COMPETITION, RIFLE AND PISTOL
U.S. ARMY, PENDANT, SUSPENSION BAR AND SUSPENSION DEVICE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

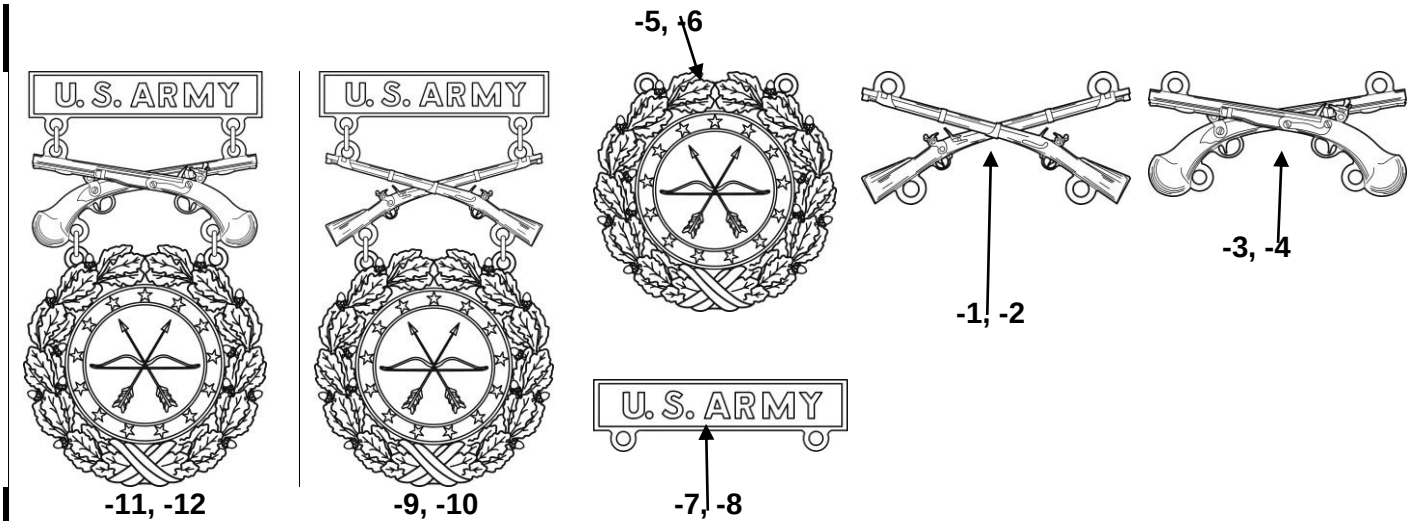

DASH NO:

-1: Rifle, Silver, National and All Army Matches
-2: Rifle, Bronze, Army Area Matches
-3: Pistol Silver, National and All Army Matches
-4: Pistol, Bronze, Army Area Matches
-5: Pendant, Silver, National and All Army Matches
-6: Pendant, Bronze, Army Area Matches
-7: Suspension, Bar, Silver, National and All Army Matches
-8: Suspension, Bar, Bronze, Army, Area, Matches
-9: Badge, Clasp, Rifle, Silver, National and All Army Matches
-10: Badge, Clasp, Rifle, Bronze, Army Area Matches
-11: Badge, Clasp, Pistol, Silver, National and All Army Matches

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:49Z
Check the source to verify that this is the current version before use.

-12: Badge, Clasp, Pistol Bronze, Army Area Matches
MATERIALS: Red Brass 85/15 (UNS Alloy No.C-230)

FINISH:
OBVERSE:
-1, -3, -5, -7, -9, and -11: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-2, -4, -6, -8, -10, and -12: Brass, Oxidized, Buffed Relieved and shall match TIOH Metal Finish Chip Number 4.

REVERSE:
-1, -3, -5, -7, -9, and -11: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

-2, -4, -6, -8, -10, and -12: Brass, Matte Finish and shall match TIOH Metal Finish Chip Number 2

DIMENSIONS:
HEIGHT (Overall):
-1, -2, -3, and -4: 2-1/4 inches (REF)
-5, -6: 1-1/4 inches (REF)
-7, -8: 11/32 inch (REF)
-9, -10, -11, -12: 19/32 inch (REF)
WITDTH (Overall): 1-1/4 inches (REF)
THICKNESS (At rim): 0.060 inch $\pm$ 0.010 inch
-1 thru -6: 0.105 inch $\pm$ 0.010 inch
-7, -8: 0.075 inch $\pm$ 0.010 inch
-9, -11: 0.080 inch $\pm$ 0.010 inch
-10,-12: 0.080 inch $\pm$ 0.010 inch

ATTACHING DEVICE AND LUGS:
1. All lugs are integral.

2. Lugs shall be 0.030 inch + 0.010 inch - 0 in thickness and shall be made with the same material and finish as the pendant and suspension bar.

3. -5, -6, -7 and -8 shall be furnished with two jump ring links attached. Links shall be 13/64 inch $\pm$ 1/64 inch in width and 1/4 inch $\pm$ 1/64 inch in length and shall be fabricated from 0.044 inch $\pm$ 0.005 inch diameter wire. The links shall be made with the same material and finish as the pendant and suspension bar.

4. The attaching device shall be prong and wing type clutch. The prongs shall be located on the horizontal center line of the bar equidistant from each end and 3/4 inch $\pm$ 1/64 apart.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. -1, -3, -5, -7, -9, and -11: Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:49Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-485)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:49Z
Check the source to verify that this is the current version before use.