NOT MEASUREMENT SENSITIVE


MIL-B-3628/14E
28 February 1990
SUPERSEDING
MIL-B-3629/14D
31 October 1969

MILITARY SPECIFICATION SHEET


BADGE, QUALIFICATION, BASIC, EXPERT, SHARPSHOOTER AND MARKSMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

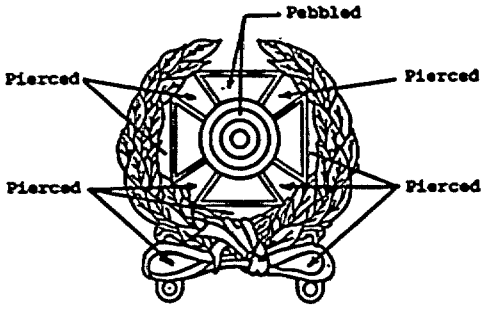

EXPERT



SHARPSHOOTER



MARKSMAN

MATERIAL: Red brass, nickel silver or zinc aluminum

DIMENSIONS:

HEIGHT (Overall):
- -1: 1-11/32 inch (3.41 cm) (REF)
- -2: 1 inch (2.54 cm) (REF)
- -3: 1 inch (2.54 cm) (REF)

WIDTH (Overall):
- -1: 1-5/32 inch (2.94 cm) (REF)
- -2: 1 inch (2.54 cm) (REF)
- -3: 1 inch (2.54 cm) (REF)

THICKNESS (At rim of cross): .070 inch ± .005 inch (0.177 cm) ± (0.012 cm)

Dash no:
- -1: Expert
- -2: Sharpshooter
- -3: Marksman

FINISH:

Red brass: Nickel plated, silver plated, oxidized, matte finish, highlights polished. Reverse and edges clean.

Nickel Silver: Silver plated, oxidized, matte finish, highlights polished. Reverse and edges clean.

Zinc Aluminum: Copper plated, nickel plated, silver plated, oxidized, matte finish, highlights polished. Revese and edges clean.

AMSC/NA FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. All lugs are integral.
2. The badges may be made from sterling silver for commercial sale and if so the thickness dimensions given shall be used for reference only. The weight specified below shall govern. The finish for sterling silver items shall be as specified except the requirements for nickel silver, grand copper plating shall not apply:

WEIGHT (Minimum)	
-1:	135 grains
-2:	129 grains
-3:	127 grains

3. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal centerline, equidistant from each side and 1 inch ± 1/32 inch (2.54 cm) ± (0.08 cm) apart for dash no. 1 and 3/4 inch ± 1/32 inch (1.91 cm) ± (0.08 cm) apart for dash nos. 2 and 3.
4. Lugs shall be equidistant from each side and shall be .675 inch + .015 inch -.000 (1.71 cm) + (0.038 cm) -.000 on center.
5. Qualification badges covered by this sheet shall be used in conjunction with badge clasps covered on specification sheet MIL-B-3628/15.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project No. 8455-0452

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.