NOT MEASUREMENT SENSITIVE


MIL-B-3628/14G
26 April 1991
SUPERSEDING
MIL-B-3628/14F
19 October 1990

MILITARY SPECIFICATION SHEET

Badge, Qualification, Basic, Expert, Sharpshooter and Marksman, Army

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

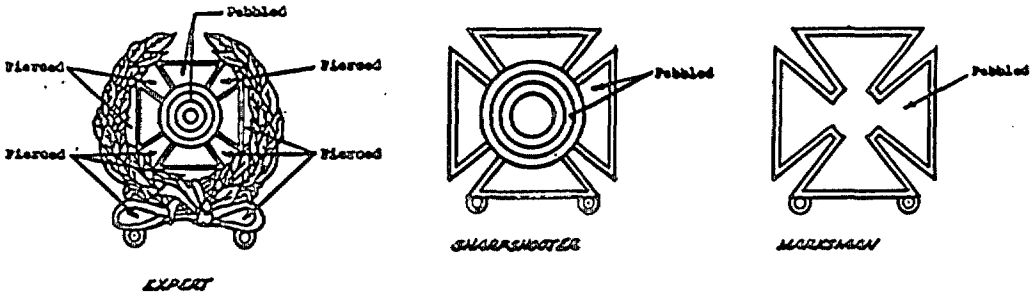

MATERIAL: Red brass, nickel silver, or zinc aluminum

DASH NO:
-1: Expert
-2: Sharpshooter
-3: Marksman

DIMENSIONS:
HEIGHT (Overall):
-1: 1-11/32 inches (3.41 cm) (REF)
-2: 1 inch (2.54 cm) (REF)
-3: 1 inch (2.54 cm) (REF)

WIDTH (Overall):
-1: 1-5/32 inches (2.94 cm) (REF)
-2: 1 inch (2.54 cm) (REF)
-3: 1 inch (2.54 cm) (REF)

THICKNESS (At rim of cross): .070 inch ± .005 inch (0.177 cm ± 0.012)

FINISH:
Red brass or nickel silver: Nickel plated (red brass only), silver plated, oxidized, matte finish, highlights polished.
Zinc Aluminum: Copper plated, nickel plated, silver plated, oxidized, matte finish highlights polished.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

NOTES:

1. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal centerline, equidistant from each side and 1 inch ± 1/32 inch (2.54 ± 0.08 cm) apart for Dash No 1 and 3/4 inch ± 1/32 inch (1.91 cm ± 0.08 cm) apart for Dash No 2 and 3.

2. All lugs are integral. Lugs shall be equidistance from each side and shall be .675 inch ± .015 inch - .000 (1.71 cm ± 0.038 cm - .000) on center.

3. Badges covered by this specification sheet shall be used in conjunction with badge clasps covered in specification sheet MIL-B-3628/15.

4. Badge may be nickel or rhodium plated with a mirror-like polished finish for commercial sale except the silver plating requirement shall not apply.

Custodian:
Army - IH

Review Activity:
DLA - CT

Preparing Activity:
Army - IH

(Projected No. 8455-0586)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.