NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/14M
1 June 1998
SUPERSEDING
MIL-DTL-3628/14L
23 September 1997

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARKSMANSHIP - EXPERT, SHARPSHOOTER AND MARKSMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

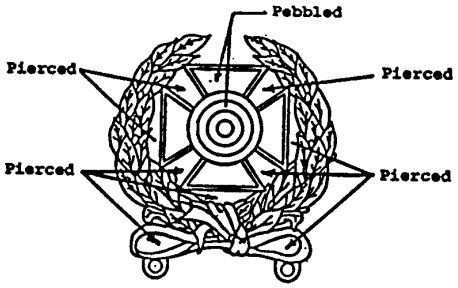

EXPERT



SHARPSHOOTER



MARKSMAN

MATERIAL: Red Brass, Nickel Silver or Zinc Aluminum

DASH NO.
-1: Expert
-2: Sharpshooter
-3: Marksman

FINISH:

RED BRASS OR NICKEL SILVER: Nickel Plated (Red Brass only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

ZINC ALUMINUM: Copper Plated, Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (Overall):
-1: 1-11/32 inches (3.41 cm) (REF)
-2: 1 inch (2.54 cm) (REF)
-3: 1 inch (2.54 cm) (REF)

WIDTH (Overall):
-1: 1-5/32 inches (2.94 cm) (REF)
-2: 1 inch (2.54 cm) (REF)
-3: 1 inch (2.54 cm) (REF)

THICKNESS (At Rim Of Cross): 0.070 inch ± 0.005 inch (0.177 cm ± 0.012 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal centerline, equidistant from each side and 1 inch ± 1/32 inch (2.54 ± 0.08 cm) apart for Dash No -1 and 3/4 inch ± 1/32 inch (1.91 cm ± 0.08 cm) apart for Dash No -2 and -3.

4. The lug shall have an outside diameter of 0.125 inch ± 0.005 inch (3.17 cm ± 0.012 cm). The thickness of the lug shall be approximately 0.060 inch (0.152 cm). Each lug shall have a 0.055 inch ± 0.005 inch (0.139 cm ± 0.012 cm) diameter hole centered in the lug. All lugs shall be an integral part of the item. At the option of the manufacturer, the lug may be cut into the working die or may be formed from salvage during the trimming operation.

5. Badges covered by this specification sheet shall be used in conjunction with badge clasps covered in specification sheet MIL-DTL-3628/15.

6. Badge may be nickel or rhodium plated with a mirror-like polished finish which shall match the TIOH Metal Finish Chip Number 16 for commercial sale only. For nickel plated or rhodium plated items, the silver plating requirement shall not apply.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0939)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.