INCH-POUND


MIL-DTL-3628/14N
05 November 2012
SUPERSEDING
MIL-DTL-3628/14M
1 June 1998

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARKSMANSHIP - EXPERT, SHARPSHOOTER AND MARKSMAN, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

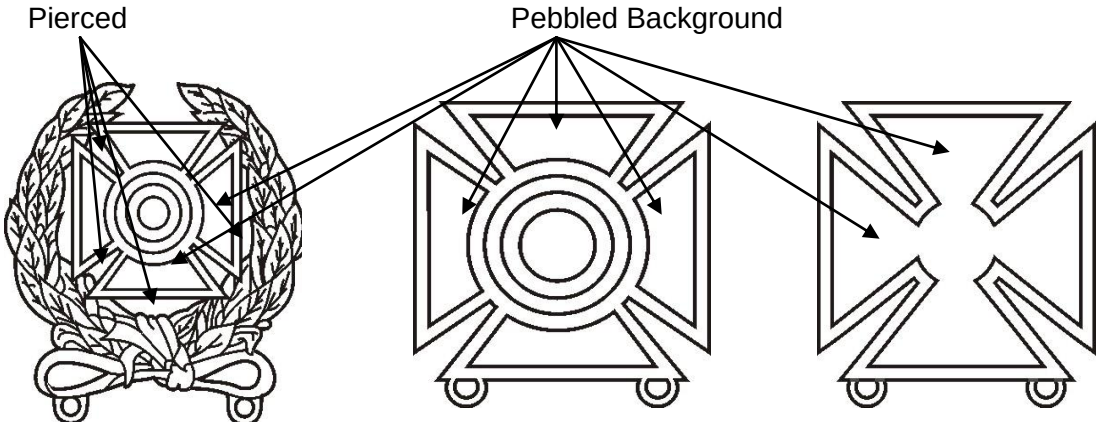

EXPERT
-1

SHARPSHOOTER
-2

MARKSMAN
-3

DASH NO.
-1: Expert
-2: Sharpshooter
-3: Marksman

MATERIAL (-1 through -3): Red Brass 85/15 (UNS Alloy No. C-230) Nickel Silver 65/18 (UNS Alloy No.C-752) Zinc Aluminum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

FINISH: 1.Red Brass 85/15(UNS Alloy No. C-230): or Nickel Silver Nickel Plated 65/18 (UNS Alloy No. C-752) (C-230 only), Silver Plated, Oxidized, Relieved, Matte Finish and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.

2. Zinc Aluminum Copper Plated, Nickel Plated, Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.

DIMENSIONS:

HEIGHT (overall):

-1: 1-11/32 inches (REF)
-2: 1 inch (REF)
-3: 1inch (REF)

WIDTH (overall):

-1: 1-5/32 inches (REF)
-2: 1inch (REF)
-3: 1inch (REF)

THICKNESS: (at rim of cross)

0.070 inch $\pm$ 0.010 inch

PIERCING , LUG AND ATTACHING DEVICE:

1. The attaching device shall be prong and clutch type.

2. The prongs shall be located on the horizontal centerline, equidistant from each side and 1 inch $\pm$ 1/32 inch. apart for -1 and 3/4 inch $\pm$ 1/32 inch apart for -2 and -3.

3. The lug shall have an outside diameter of 0.125 inch $\pm$ 0.005 inch.

4. The thickness of the lug shall be approximately 0.060 inch.

5. Each lug shall have a 0.055 inch $\pm$ 0.005 inch diameter hole centered in the lug.

6. All lugs shall be an integral part of the item.

7. Piercing shall be indicated.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. At the option of the manufacturer, the lug may be cut into the working die or may be formed from salvage during the trimming operation.

3. Badges covered by this specification slash sheet shall be used in conjunction with badge clasps covered in specification slash sheet MIL-DTL-3628/15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

4. Badge may be nickel or rhodium plated with a Mirror-Like Polished Finish which shall match the TIOH Metal Finish Chip Number 16 for commercial sale only. For nickel plated or rhodium plated items, the silver plating requirement shall not apply.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2012-157)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.