NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/14R
5 October 2020
SUPERSEDING
MIL-DTL-3628/14P
30 November 2015

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARKSMANSHIP - EXPERT, SHARPSHOOTER AND MARKSMAN, U. S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

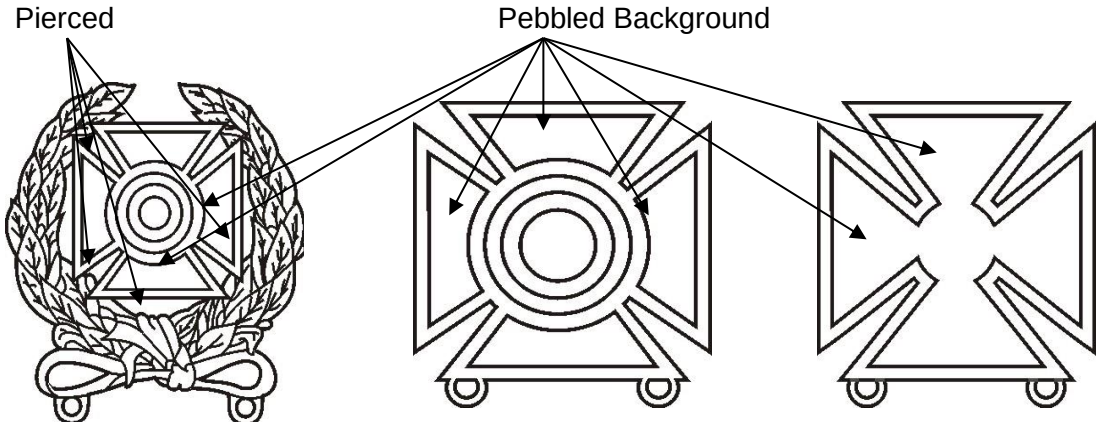

EXPERT
-1

SHARPSHOOTER
-2

MARKSMAN
-3

DASH NO.
-1: Expert
-2: Sharpshooter
-3: Marksman

MATERIAL (-1 through -3): Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No.C-752) Zinc Aluminum.

FINISH: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (overall):
-1: 1-11/32 inches (REF)
-2: 1 inch (REF)
-3: 1inch (REF)
WIDTH (overall):
-1: 1-5/32 inches (REF)
-2: 1inch (REF)
-3: 1inch (REF)
THICKNESS: (at rim of cross)
0.070 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device shall be prong and wing type clutch

2. The prongs shall be located on the horizontal centerline, equidistant from each side and 1 inch ± 1/32 inch. Apart for -1 and 3/4 inch ± 1/32 inch apart for -2 and -3.

3. The lug shall have an outside diameter of 0.125 inch ± 0.005 inch.

4. The thickness of the lug shall be approximately 0.060 inch.

5. Each lug shall have a 0.055 inch ± 0.005 inch diameter hole centered in the lug.

6. All lugs shall be an integral part of the item.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. At the option of the manufacturer, the lug may be cut into the working die or may be formed from salvage during the trimming operation.

3. Badges covered by this specification slash sheet shall be used in conjunction with badge clasps covered in specification slash sheet MIL-DTL-3628/15.

4. Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14, May be used for commercial sale.

5. Piercing shall be indicated.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-582)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:50Z
Check the source to verify that this is the current version before use.