INCH-POUND


MIL-DTL-3628/15M
14 February 2013
SUPERSEDING
MIL-DTL-3628/15L
22 January 1999

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARKSMANSHIP CLASPS – EXPERT, SHARPSHOOTER AND MARKSMAN, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

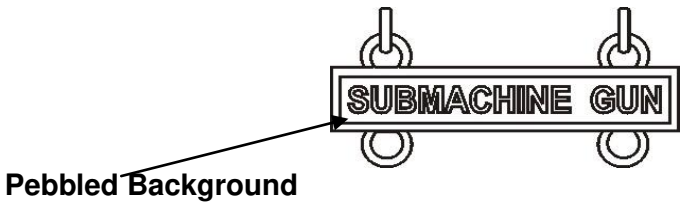

DASH NO: BADGE CLASP TITLES

-1: Rifle	-11: Machine Gun
-2: Recoilless Rifle	-12: Rocket Launcher
-3: Auto-Rifle	-13: Submachine Gun
-4: Small Bore Rifle	-14: Grenade
-5: Bayonet	-15: Field Artillery
-6: Pistol	-16: A.A. Artillery
-7: Flame Thrower	-17: Mortar
-8: Small Bore Pistol	-18: Missile
-9: Tank Weapons	-19: Aeroweapons
-10: Carbine	

MATERIALS:
BADGE CLASP: Red Brass 85/15 (UNS Alloy No.C-230) or Nickel Silver 65/35 (UNS Alloy C-752)
JUMP RINGS: Nickel Silver 65/35 (UNS Alloy C-752)

FINISH: Nickel Plated, (C-230 only) Silver Plated, Oxidized, Buffed Relieved, Matte Finish with reverse and edges clean and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Including lugs): 0.410 inch (REF)
HEIGHT (Excluding lugs): 0.200 inch (REF)
WIDTH (Overall): 1 inch (REF)
THICKNESS (At rim): 0.060 inch ± 0.010 inch.

LUGS, CLASP AND JUMP LINKS:
1. Lugs shall be located equidistant from each end and 0.0675 inch ± 0.015 inch.

2. All badge clasps are of identical design except for lettering.

3. Two jump ring links shall be positioned on top lugs and shall use the same finish as the badge clasp. Links shall be 13/64 inch ± 1/64 inch in width and 1/4 inch ± 1/64 inch in length and shall be fabricated from 0.044 inch ± 0.005 inch diameter wire.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Badge clasps covered by this specification sheet shall be used in conjunction with the basic qualification badges on specification sheet MIL-DTL-3628/14.

3. Badge may be nickel or rhodium plated with a mirror-like polished finish which shall match the TIOH metal Finish Chip Number 16 for commercial sale only. For nickel plated or rhodium plated items, the silver plating requirement shall not apply.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2013-106)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.