INCH-POUND

MIL-DTL-3628/15P
14 September 2016
SUPERSEDING
MIL-DTL-3628/15N
30 November 2015

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARKSMANSHIP CLASPS - EXPERT, SHARPSHOOTER AND MARKSMAN, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

Pebbled Background

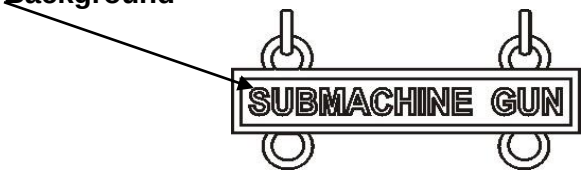

DASH NO.; BADGE CLASP TITLES

-1: Rifle
-2: Recoilless Rifle
-3: Auto. Rifle
-4: Small Bore Rifle
-5: Bayonet
-6: Pistol
-7: Flame Thrower
-8: Small Bore Pistol
-9: Tank Weapons
-10: Carbine
-11: Machine Gun
-12: Rocket Launcher
-13: Submachine Gun
-14: Grenade
-15: Field Artillery
-16: A.A. Artillery
-17: Mortar
-18: Missile
-19: Aeroweapons

MATERIAL:
BADGE CLASP AND JUMP RINGS: Red Brass 85/15 (UNS Alloy No. C-230) or Nickel Silver 65/35 (UNS Alloy No. C-752)

FINISH: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Including lugs): 0.410 inch (REF)
HEIGHT (Excluding lugs): 0.200 inch (REF)
WIDTH (Overall): 1 inch (REF)
THICKNESS (at rim): 0.060 inch ± .005 inch

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Lugs shall be located equidistant from each end and 0.0675 inch ± 0.015 inch.

3. Two jump ring links shall be positioned on top lugs and shall use the same finish as the badge clasp. Links shall be 13/64 inch ± 1/64 inch in width and 1/4 inch ± 1/64 inch in length and shall be fabricated from 0.044 inch ± 0.005 inch diameter wire.

4. All badge clasps are of identical design except for lettering.

5. Badge clasps covered by this specification sheet shall be used in conjunction with the basic qualification badges on specification sheet MIL-DTL-3628/14.

6. Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14. May be used for commercial sale.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity;
DLA - CT

(Project No. 8455-2016-765)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.