NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/16J
15 November 1996
SUPERSEDING
MIL-B-3628/16H
24 September 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, RIFLE, MARINE CORPS; PENDANT AND SUSPENSION BAR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

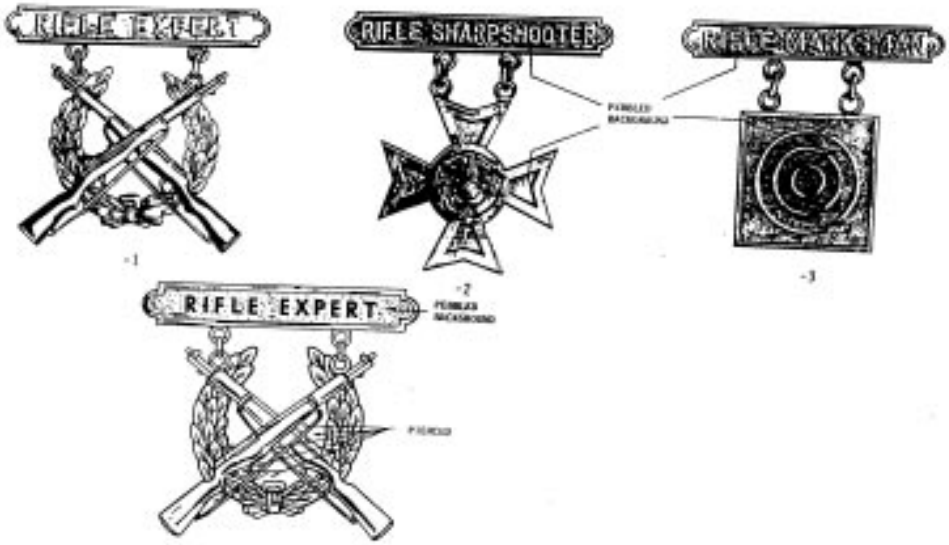

DASH NO.
-1: Expert
-2: Sharpshooter
-3: Marksman

MATERIAL: Red Brass, Nickel Silver or Zinc Aluminum

FINISH:
RED BRASS OR NICKEL SILVER: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16 except Textured Background Areas which shall be lightly Polished.
ZINC ALUMINUM: Copper Plated, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16 except Textured Background Areas which shall be lightly Polished.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
PENDANT:
HEIGHT (Overall):
-1: 1-5/16 inches (3.33 cm) (REF)
-2: 1-7/16 inches (3.65 cm) (REF)
-3: 1-5/32 inches (2.94 cm) (REF)
THICKNESS:
-1: 0.100 inch ± 0.005 inch (0.254 cm ± 0.012 cm) (At Thickest Point)
-2: 0.070 inch ± 0.005 inch (0.177 cm ± 0.012 cm) (At Rim)
-2: 0.190 inch ± 0.005 inch (0.482 cm ± 0.012 cm) (Total at Center)
-3: 0.070 inch ± 0.005 inch (0.177 cm ± 0.012 cm) (At Center)

SUSPENSION BAR:
HEIGHT (Excluding Lug): 13/32 inch (1.03 cm) (REF)
WIDTH (Overall): 1-29/32 inches (4.84 cm) (REF)
THICKNESS (At Edge): 0.060 inch ± .005 inch (0.152 cm ± 0.012 cm)

ASSEMBLED HEIGHT (Overall):
-1: 1-3/4 inches ± 1/64 inch (3.33 cm ± 0.04 cm)
-2: 1-3/4 inches ± 1/64 inch (3.33 cm ± 0.04 cm)
-3: 1-5/8 inches ± 1/64 inch (2.94 cm ± 0.04 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated for Dash No. -1 only.

3. Qualification clasps used with Dash No. -1 shall conform to MIL-DTL-3628/18.

4. The attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line on the back of the suspension bar, equidistant from each end and 1-1/2 inches ± 1/16 inch (3.81 cm ± 0.16 cm) apart.

5. The Marine Corps emblem shall be circumscribed in a 1/2 inch (1.27 cm) diameter circle and shall be soft soldered to the target area of the cross for Dash No. -2 after trimming and piercing.

6. Lugs for bar and pendant shall be located equidistant from each end of the bar and pendant. The distance, center to center of the lugs, shall be as follows:

-1: 7/8 inch ± 1/64 inch (2.22 cm ± 0.012 cm)
-2: 1/2 inch ± 1/64 inch (1.27 cm ± 0.012 cm)
-3: 5/8 inch ± 1/64 inch (1.59 cm ± 0.012 cm)

7. Links shall be 13/64 inch ± 1/64 inch (0.52 cm ± 0.04 cm) in width and 1/4 inch ± 1/64 inch (0.64 cm ±0.04 cm) in length and shall be fabricated from 0.044 inch ± 0.005 inch (0.114 cm ± 0.012 cm) diameter wire.

8. Badge may be rhodium plated with a mirror-like polished finish which shall match TIOH Metal Finish Chip Number 16 at the option of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.