NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/16P
17 February 2026
SUPERSEDING
MIL-DTL-3628/16N
2 May 2024

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, RIFLE, U.S. MARINE CORPS, PENDANT AND SUSPENSION BAR

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

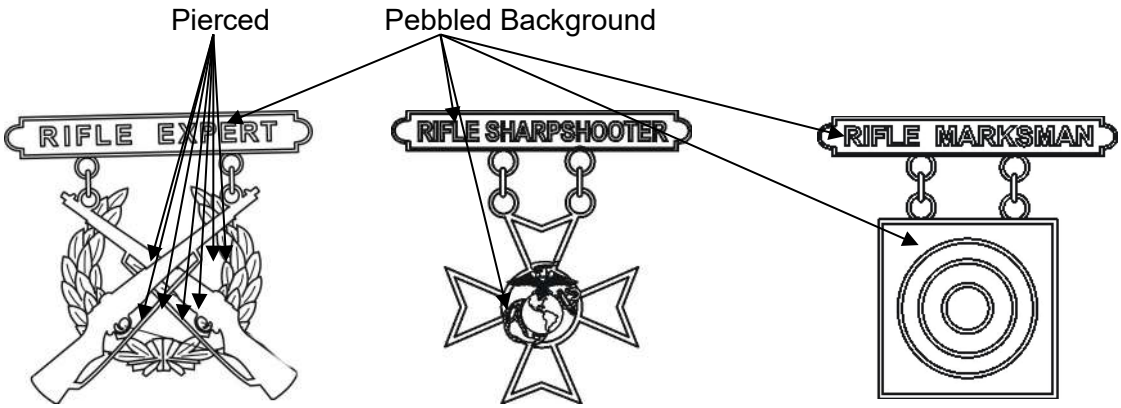

EXPERT	SHARPSHOOTER	MARKSMAN
-1	-2	-3

DASH NO.
-1: Expert
-2: Sharpshooter
-3: Marksman

MATERIAL (-1 through -3): Red Brass 85/15 (UNS Alloy No.C-230), Nickel Silver or Zinc Aluminum.

FINISH:
1. Red Brass 85/15(UNS Alloy No. C-230): or Nickel Silver: Nickel Plated ,Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16 except Textured Background Areas which shall be lightly Polished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.

2. Zinc Aluminum: Copper Plated, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16 except Textured Background Areas which shall be lightly Polished.

DIMENSIONS:
PENDANT:
HEIGHT:
-1: 1-5/16 inches (REF)
-2 (Including lug): 1-7/16 inches (REF)
-3 (Including lug): 1-5/32 inches (REF)
WIDTH:
-1: 1-1/32 inches (REF)
-2: 1-1/4 inches (REF)
-3: 1 inch (REF)
THICKNESS:
-1: 0.100 inch ± 0.010 inch (At thickest point)
-2: 0.070 inch ± 0.005 inch (At rim)
-2: 0.190 inch ± 0.010 inch (Total at center)
-3: 0.070 inch ± 0.005 inch (At center)
SUSPENSION BAR:
HEIGHT: 13/32 inch (REF)
WIDTH: 1-29/32 inches (REF)
THICKNESS (At edge): 0.060 inch ± 0.005 inch
ASSEMBLED HEIGHT (Overall):
-1: 1-3/4 inches ± 1/64 inch
-2: 1-3/4 inches ± 1/64 inch
-3: 1-5/8 inches ± 1/64 inch

ATTACHING DEVICE & PIERCING:
1. The attaching device shall be prong and wing clutch type.

2. The prongs shall be located on the horizontal center line on the back of the suspension bar equidistant from each end and 1-1/2 inches ± 1/16 inch apart.

3. The Marine Corps emblem shall be circumscribed in a 1/2 inch diameter circle and shall be soft soldered to the target area of the cross for -2 after trimming and piercing.

4. Piercing shall be as indicated for -1 only.

5. Links shall be 13/64 inch ± 1/64 inch in width and 1/4 inch ± 1/64 in length and shall be fabricated from 0.044 inch ± 0.005 inch diameter wire.

6. Lugs for bar and pendant shall be located equidistant from each end of the bar and pendant. The distance, center to center of the lugs, shall be as follows:

-1: 7/8 inch ± 1/64 inch
-2: 1/2 inch ± 1/64 inch
-3: 5/8 inch ± 1/64 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The specification slash sheet for the Qualification clasps used with -1 is MIL-DTL-3628/18.

3. Badge may be rhodium plated with a Nickel Plated, Mirror-like Polished will match the TIOH Metal Finish Chip Number 16 at the option of the manufacturer.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Navy - MC

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-060)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:51Z
Check the source to verify that this is the current version before use.