DDD-P-56C
January 27, 1970
SUPERSEDING
Fed. Spec. DDD-P-56B
February 28, 1966

FEDERAL SPECIFICATION

PAD, MATTRESS, COTTON, QUILTED, WHITE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a quilted cotton mattress pad.

1.2 Classification.

1.2.1 Type and sizes. Mattress pads covered by this specification shall be of one type and two sizes, as specified (see 6.2).

Size 1 - 36 x 76 inches.

Size 2 - 52 x 75 inches.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276 - Thread, Cotton.
V-T-285 - Thread, Polyester.
CCC-C-430 - Cloth, Sheeting, Cotton, and Polyester and Cotton.
DDD-L-20 - Label; For Clothing, Equipage, and Tentage, (General Use).
PPP-B-636 - Box, Fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.
Fed. Test Method Std. No. 191 - Textile Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies).

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallet, Skids, Runners, or Pallet-type Base.
MS-16686 - Medical Services Symbol.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

Laws and Regulations:

Rules and Regulations Under the Textile Fiber Products Identification Act.

(Copies may be obtained, without charge, from the Federal Trade Commission, Washington, D. C. 20580).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

U. S. Department of Agriculture Publication:

C&MS-SRA-180 - Cotton and Cotton Linters Standards.

(Application for copies should be addressed to the Department of Agriculture, Washington, D. C. 20250).

National Classification Board:

National Motor Freight Classification.

(Application for copies shall be addressed to the American Trucking Association, Inc., Attention: Tariff Order Section, 1616 P Street N. W., Washington, D. C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples when furnished are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 Material.

3.2.1 Linters. The cotton linters shall be new (not previously used) conforming to grade 3, staple 3 of USDA Publication No. C&MS-SRA-180.

3.2.2 Cotton. The cotton shall be new (not previously used) having a minimum staple length of 7/8 inch and not lower in grade than the lowest grade in the Official Cotton Standards as indicated In USDA Publication C&MS-SRA-180. The use of reginned cotton will be permitted provided the reginned cotton is equivalent in grade to the standards listed above.

3.2.3 Felt. The felt for the pads shall be made from a blend consisting of 85 percent cotton linters conforming to 3.2.1 and 15 percent staple cotton conforming to 3.2.2. The felt shall be cleaned and garnetted so as to produce unbroken laminated sheets of interlaced garnetted felt and shall be trimmed on all four sides to produce an even thickness throughout the batting. To facilitate handling, a single ply of cellulosic wadding may be applied to the sheets of felt.

3.2.4 Cloth. The basic cloth for the cover of the mattress pads shall be seamless, bleached white, cotton sheeting conforming to type II, class 2, style B of CCC-C-430. The bias cut binding shall be made from the same cloth except that the starch and protein content shall not exceed 8.0 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

3.2.5 Thread. The thread used for quilting and stitching the binding of the pad shall be either cotton or polyester thread.

3.2.5.1 Thread, cotton. The cotton thread shall conform to type IA2 of V-T-276. The thread for quilting shall be ticket No. 50, 3 ply. The thread for binding shall be ticket No. 30, 3 ply.

3.2.5.2 Thread, polyester. The polyester thread shall conform to type I or II, size A, class 1, sub-class A of V-T-285.

3.3 Size. The mattress pads shall measure not less than 36 inches in width and 76 inches in length for size 1, and 52 inches in width and 75 inches in length for size 2 when examined for dimensions as specified in 4.2.2.2.

3.4 Weight. The weight of the mattress pad shall be not less than 20 ounces per square yard based on the finished size when tested as specified in 4.2.4.

3.5 Construction.

3.5.1 Stitches, seams, and stitching. Stitches, seams and stitching types, as specified in table I, shall conform to FED-STD-751.

3.5.2 Thread breaks and ends of seams. Thread breaks and ends of all seams and stitching (except on quilting) shall be back stitched or back tacked not less than 3/8 inch.

3.5.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.6 Manufacturing operations requirements. The mattress pads shall be manufactured in accordance with all operations specified in table I. The supplier is not required to follow the exact sequence of operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE I	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
1.	Cutting.					
	a. The cover shall be cut with no piecing seams on either face.					
	b. The binding shall be cut on the bias, not less than 1-9/16 inches wide.					
	c. The felt shall be trimmed on all four sides.					
2.	Quilting.					
	a. Position felt padding between two cover pieces.					
	b. Quilting shall be accomplished with either zig-zag or criss-cross (diamond) stitching as specified below.	301	-	5-9	50-3 or A	50-3 or A
	(1) Zig-zag. The horizontal distance between the parallel rows of stitches shall be 1 ± 1/16 inch. The length of the row of stitches in each direction before changing direction shall be 1-7/8 ± 1/8 inches (see figure 1 (A)).					
	(2) Criss-cross (diamond). The distance between the horizontal points shall be 2 ± 1/8 inches and the distance between the vertical points shall be 3-1/8 ± 1/8 inches, i.e.: the diamond shaped by criss-cross stitching shall measure 2 ± 1/8 inches parallel to the filling direction of the cloth and 3-1/8 ± 1/8 inches in the warp direction of the cloth. The stitching forming the sides of the diamond shall be 1-7/8 ± 1/8 inches (see figure 1 (B)).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS TABLE I	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN or LOOPER
3.	Binding.					
	a. Bind the edges of the mattress pad with a continuous binding with the raw edges of the binding turned under and stitched 1/8 ± 1/16 inch from turned edge catching all raw edges in the stitching. The binding shall begin on the short side at a corner and continue around pad finishing not less than 6 inches beyond the starting end on the short side of pad.	301	BSc-1	6-10	30-3 or A	30-3 or A
	b. The labels shall be centered positioned adjacent to each other on one end of the pad with the top or bottom edges caught in the binding seam.	301	BSc-1	6-10	30-3 or A	30-3 or A
4.	Remove all spots and stains.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

3.6.1 Figure 1. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.7 Labels. Each mattress pad shall have an identification label and a state label attached to one end of the pad.

3.7.1 Identification label. The identification label shall conform to type I, class 5 of DDD-L-20 except that the legend and size of characters shall be as specified below:

Legend	Size of character (minimum, inch)
Nomenclature	1/8
Contract number	3/32
Stock number	3/32
Textile Fiber Products Identification Act information	3/32

3.7.2 State label. The state label shall conform to the legal requirements of the state in which the mattress pads are manufactured.

3.7.3 Medical label. When specified (see 6.2), mattress pads procured for medical activities shall have added to the label specified in 3.7.1, a caduceus approximately one inch in height centered between the letters "U" and "S" of appropriate size conforming to type I of MS-16686.

3.8 Workmanship. The mattress pads shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQLs).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.2.1.1 Testing of components. Testing shall be performed on the components listed in table III. The sample unit for the linters and the cotton shall be 1/2 pound of material. The sample unit for the garnetted felt shall be 12 by 12 inches. The sample size shall be as specified in table II and the lot shall be unacceptable if one or more units fail to meet any requirement specified.

TABLE II.

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE III. Component tests

Component lot expressed in terms of	Characteristic	Requirement paragraph	Test method
Linters (1 bale)	Grade	3.2.1	Visual 1/
	Staple	3.2.1	
Cotton (1 bale)	Grade	3.2.2	Visual 1/
	Staple	3.2.2	
Garnetted felt (100 pounds)	Quality	3.2.3	Visual 1/

1/ One determination per sample unit and the results reported as pass or fail.

NOTE: Samples of cotton linters shall not be sent to the Government laboratory for grading if the linters have been officially graded by the United States Department of Agriculture. The inspector shall obtain from the supplier a certificate or an attested or photostatic copy of the certificate showing the number of bales, the number of identifying mark on each bale graded, and the identity of the grades when United States Department of Agriculture graded supplier furnished material is used. Whenever supplier furnished

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

cotton linters have not been graded by a properly qualified employee of the Government or a Government licensed classifier, the sample of linters shall be sent to the Government laboratory for grading. Grading by any other than Government employed graders or Government licensed classifiers shall not be acceptable.

4.2.1.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.2.2 Examination of the end item. Defects found during this examination shall be classified in accordance with the lists shown in 4.2.2.1 and 4.2.2.2. The sample unit for these examinations shall be one finished mattress pad. The lot size shall be expressed in units of one finished mattress pad. The inspection levels and AQLs for these examinations shall be in accordance with 4.2.2.3.

4.2.2.1 Visual examination. The finished mattress pad shall be examined for defects listed in table IV.

TABLE IV. Classification of defects

Examine	Defects	Classification Major	Minor
Cloth defects (sheeting)	Any hole, cut, tear, or weak place.	X	
	Objectionable or rancid odor.	X	
	Cloth not as specified.	X	
	Three or more contiguous broken or missing warp or filling threads.	X	
	Two continguous broken or missing warp or filling threads.		X
	Loose or weakening slub.		X
Cleanness	Any spot or stain, attributable to the sheeting cloth only, more than 1/4 inch square in area, clearly noticeable at at a distance of 6 feet.		X
	More than three spots or stains attributable to the sheeting cloth only, up to 1/4 inch square in area, clearly noticeable at a distance of 6 feet.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects (cont'd)

Examine	Defects	Classification Major	Minor
Cleanness (cont'd)	Any oil or grease spot or stain attributable to the padding.	X	
	Any colored or dyed yarns attributable to the padding.	X	
Workmanship	Any thin place devoid of padding 2 inches square or more in area.	X	
	Any thin place devoid of padding, more than 1 inch square in area, but less than 2 inches square in area.		X
	Three or more thin places devoid of padding regardless of area.	X	
	Furrow, lump or bulge resulting from uneven or improper distribution of the padding (lapped padding is not considered improper distribution).	X	
	More than four untrimmed thread ends or loose threads, one inch or more in length.		X
	Edges badly twisted, pleated, wavy or puckered.		X
	Three or more pleats less than 8 inches in length and 1/4 inch or more in depth at widest point regardless of area per pad.		X
	Any pleat regardless of area, 8 inches or more in length and 1/4 inch or more in depth at widest point, or any pleat not within 5 inches from any edge extending more than 2 inches in length.	X	
	Any splice in sheeting cloth.	X	
	Needle chews expected to develop into a hole.	X	
Binding	Not cut in bias direction.	X	
	Torn or chewed.	X	
	Not one continuous length per pad.		X
	Closing end extends less than 12 inches beyond the starting end.		X
	Binding not securely caught in binding seam.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects (cont'd)

Examine	Defects	Classification Major	Minor
Seams and stitching	Binding not seamed with seam type BSc-1.		X
	Not stitch type 301 throughout.		X
	Stitching margin of binding less than 1/16 inch or more than 3/16 inch.		X
	Binding seam does not begin at corner on short side of pad.		X
	Binding sewn with less than 6 stitches per inch.		X
	Binding sewn with more than 10 stitches per inch.		X
	Any open seam or run-off more than 1 inch in length.	X	
	Any open seam or run-off 1 inch or less in length.		X
	Edge of pad not securely caught in binding.		X
	Any raw edge of binding more than 1/2 inch in length.		X
	Three or more raw edges of binding per pad up to and including 1/2 inch in length.		X
	Raw edge of pad covering, over 2 inches in length.		X
	Two or more raw edges of pad covering, up to and including 2 inches in length.		X
	Any raw edge of the pad covering regardless of length, not caught in binding stitching.	X	
NOTE:	This examination will be made by turning back the edge of the binding at the raw edge locale and determining visually whether the pad covering is caught in the binding stitches.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects (cont'd)

Examine	Defects	Classification Major	Classification Minor
Seams and stitching (cont'd)	Stitch tension loose, resulting in a loosely secured seam or looped stitches.		X
	Stitch tension tight, stitches break when normal strain is applied to the seam or stitching.		X
	NOTE: Puckering is evidence of tight tension.		
	Thread breaks or ends of any seam (except on quilting) not backstitched as specified, except when end of seam is caught in another seam or stitching.		X
	One or more broken stitches at four or more places in quilting.		X
	Continuous skipped stitches for a distance of 1 inch or more at two or more places in quilting.		X
	Quilting dimensions not in accordance with table I.		X
	Less than 5 stitches per inch in quilting.		X
	More than 9 stitches per inch in quilting.		X
Labels	Missing or misplaced or test incomplete, incorrect, or illegible.		X

4.2.2.2 Examination for dimensions. Each mattress pad examined for dimensions, shall be laid in a flat position without tension. The length and width shall be the average of three measurements taken in each direction. Any average less than the length or width specified, for the size required, shall be classified as a defect.

4.2.2.3 Inspection level and AQL. The inspection level and AQL expressed in defects per 100 units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

Examination	Inspection level	AQL Major	AQL Total (major & minor)
4.2.2.1	II	4.0	10.0
4.2.2.2	S-3	-- (1 class)	4.0

4.2.3 Examination of preparation for delivery requirements.

4.2.3.1 Examination for packaging, packing and marking. An examination shall be made to determine that packaging, packing and marking complies with section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it shall not be palletized and need not be sealed. Shipping containers fully prepared for delivery that have not been palletized shall be examined for defects of closure. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling. Bulged or distorted container. Polyethylene bags heat sealed seams open, noncontinuous or crooked; vent hole missing or greater than 1/4 inch diameter.
Content	Number per container is more or less than required.

4.2.3.2 Examination for palletization. An examination shall be made to determine that palletization complies with section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

4.2.4 Testing of the end item. The weight of the mattress pad shall be determined on pads in equilibrium under standard conditions as defined in Fed. Test Method Std. No. 191. The lot size shall be expressed in units of one pad each. The sample size shall be as specified in table II. The weight per square yard of the pad shall be determined by weighing one complete pad to the nearest ounce and calculating by the following formula:

$$\text{Ounces per square yard} = \frac{\text{Weight of pad in ounces} \times 36 \times 36}{\text{Length in inches} \times \text{width in inches}}$$

The lot shall be unacceptable if any pad fails to meet the requirement specified in 3.4.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pad shall be neatly folded to measure approximately 18 by 25 inches. The folded pad shall then be packaged in a close-fitting flat or square style clear polyethylene film bag of 0.00125 inch thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. A 1/4 inch maximum diameter hole shall be made at one corner of each polyethylene bag to allow the excess air to escape. The bag shall be closed by means of a heat seal or pressure-sensitive tape. Closure shall be made as close as possible to the open end. Prior to or during the closure operation, excess air within the bag shall be expelled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Each pad shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Eighteen size 1 or twelve size 2 pads, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style OSC-L (minimum 3-inch overlap), grade V2s of PPP-B-636. The inside of each fiberboard container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat, eighteen size 1 or twelve size 2 in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25-1/2 inches in length, 18-1/2 inches in width, and 25-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, waterproofed, and reinforced in accordance with the appendix of the container specification.

5.2.2 Level B. Eighteen size 1 or twelve size 2 pads, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style OSC-L (minimum 3-inch overlap), type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat, eighteen size 1 or twelve size 2 in depth within a shipping container. Inside dimensions of each shipping container shall approximate 25-1/2 inches in length, 18-1/2 inches in width, and 18-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

5.2.3 Level C. Pads, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization (military requirements only). Unless otherwise specified (see 6.2), pads, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with FED-STD-123.

5.4.2 Military requirements. In addition to any special marking required by the contract or order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.4.2.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

STOCK NUMBER
ITEM DESCRIPTION
QUANTITY
SIZE

6. NOTES

6.1 Intended use. The mattress pads are intended for use on beds for the protection of mattresses by military and nonmilitary agencies.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2.1).
(c) Whether medical label is required (see 3.7.3).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(f) When palletization is not required (see 5.3).

6.3 Guide sample. For access to guide samples, address the procuring office issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

6.4 When level B packaging requirements are specified for civil agency procurements, the requirements in 5.1.1 shall apply.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 82

Review activities:

Army - MD
Navy - SA
Air Force - 82

User activities:

Navy - MS, MC

Preparing activity:

Army - GL


CIVIL AGENCY INTEREST:

AGR	INT
COM-NBS	JUS-FPI
DC	PO
GSA-FSS	VA-DMS
HEW	

Project No. 7210-0093

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

(A) Zig-zag pattern

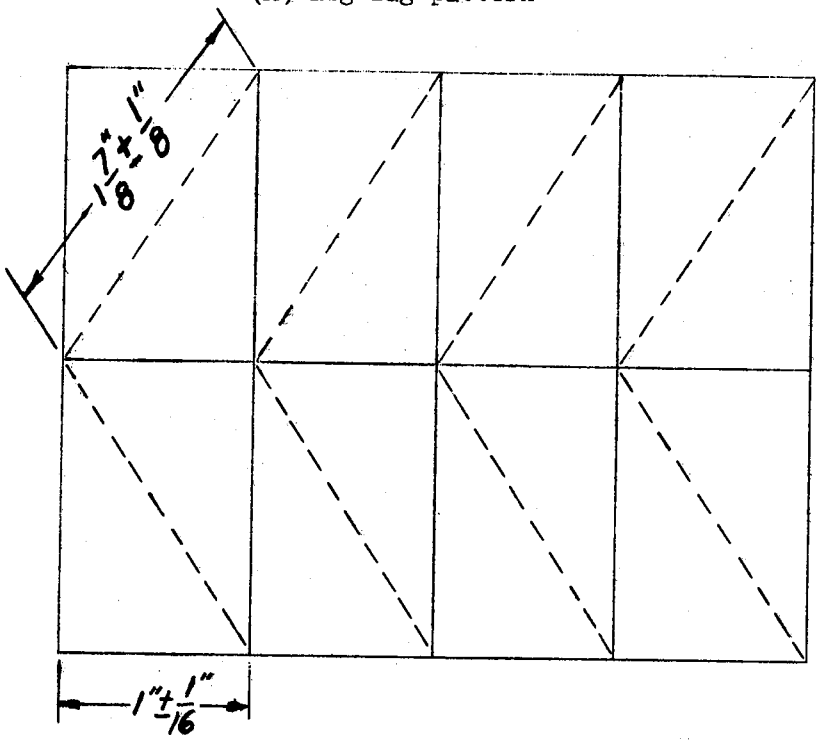

(B) Criss-cross or diamond pattern

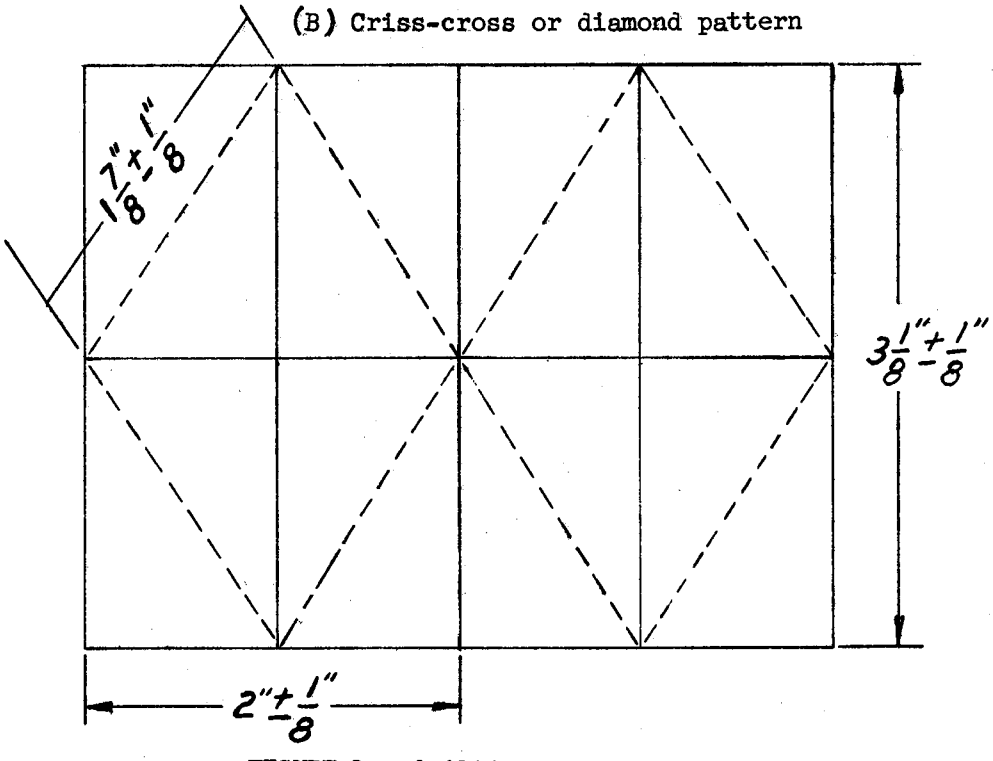


FIGURE 1 - Quilting designs.

Orders for this publication are to be placed with stration, acting as an agent for the Superintendent of Documents. See section of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Pad, Mattress, Cotton, Quilted, White DDD-P-56C

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:32Z
Check the source to verify that this is the current version before use.