DDD-P-56E
September 29, 1986
SUPERSEDING
DDD-P-56D
October 4, 1974

FEDERAL SPECIFICATION

PAD, MATTRESS, POLYESTER BATTING, QUILTED, WHITE

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a quilted polyester batting mattress pad.

1.2 Classification.

1.2.1 Type and sizes. Mattress pads shall be of one type and two sizes, as specified (see 6.2).

Size 1 - 36 by 75 inches
Size 2 - 52 by 75 inches

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

Federal Specifications

V-T-285	- Thread, Polyester
V-T-295	- Thread, Nylon
CCC-C-430	- Cloth, Sheeting, Cotton, and Polyester and Cotton
DDD-L-20	- Label; For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

Federal Standards

FED-STD-123	- Marking for Shipment (Civil Agencies)
FED-STD-751	- Stitches, Seams, and Stitchings

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards, and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification and other Federal specifications, standards, and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards, and Commercial Item Descriptions from established distribution points in their agencies.)

Military Specifications

MIL-B-41826	- Batting, Synthetic Fibers: Polyester, (Unquilted and Quilted)
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items, Clothing, Personal Equipment, and Equipage; General Specification For

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

Military Standards

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Copies of military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting activity.)

Federal Regulations

Federal Trade Commission

Rules and Regulations Under the Textile Fiber Products Identification Act

(Application for copies should be addressed to the Federal Trade Commission, Washington, DC 20580.)

Consumer Product Safety Commission

FF-4-72 - Standard for the Flammability of Mattresses and Mattress Pads (16 CFR Part 1632)

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for the issuance thereof.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Guide samples of the end item, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.3).

3.3 Flammability. All mattress pads shall meet the provisions of the Consumer Product Safety Commission Standard for the Flammability of Mattresses and Mattress Pads when tested as specified in 4.4.5.

3.4 Material. (See 6.7).

3.4.1 Cloth. The cloth for the cover of the mattress pad shall be seamless, bleached white, polyester/cotton sheeting conforming to type II, class 2, style F or type II, class 2, style G or, as an alternative, seamless bleached white cotton sheeting conforming to type II, class 2, style B of CCC-C-430. The bias cut binding shall be made from the same cloth.

3.4.2 Polyester batting. Polyester batting conforming to type VII, class 8 batting of MIL-B-41826 may be used as the filler material, except that the thickness shall be not greater than 0.52 inch and the requirements for thickness after laundering, compressional recovery after laundering, and launderability shall not apply. The bonded polyester batting shall be furnished without any cloth outer covering. The use of commercial bonded polyester batting is acceptable, provided that the batting possesses a minimum weight of 3.6 ounces per square yard, a maximum thickness of 0.52 inch, and the batting is bonded with a uniformly applied approved durable bonding agent (see 6.6). Testing for thickness and weight shall be as specified in MIL-B-41826. The maximum concentration of the applied bonding agent shall not exceed 18.0 percent of the weight of the finished bonded batting. The bonding agent shall be applied to both sides of the batting filler.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

3.4.3 Thread, polyester. The polyester thread shall conform to type I or II, size A, class 1, subclass A of V-T-285, or as an alternate, nylon thread conforming to type I or II, size A, class A, of V-T-295.

3.5 Size. The mattress pads shall measure 36 inches ± 1 inch in width and 75 inches ± 1 inch in length for size 1, and 52 inches ± 1 inch in width and 75 inches ± 1 inch in length for size 2, when examined for dimensions as specified in 4.4.4.

3.6 Construction.

3.6.1 Stitches, seams, and stitching. Stitches, seams, and stitching types, as specified in table I, shall conform to FED-STD-751.

3.6.2 Type 301 stitching. On all stitching, thread breaks, and two or more consecutive skipped or run-off stitches shall be overstitched not less than 1 inch back of the break. Ends of stitching shall be backstitched or backtacked not less than 1/2 inch, except where ends are caught in other seams and stitching. Thread tensions shall be balanced and maintained so that there will be no loose or excessively tight stitching resulting in puckering of the sewn materials. The stitch construction shall be interlocked between the sewn materials.

3.6.2.1 Repairs of type 301 stitching. When making repairs of type 301 stitching, the ends of stitching are not required to be backstitched. Repairs shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of stitching.

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the material, and restitching in the required manner.

3.6.2.2 Thread ends. All thread ends shall be trimmed to a length of not more than 1/4 inch.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

3.6.4 Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in 4.4.3 shall be removed from production and replaced with nondefective material.

3.7 Manufacturing operations requirements. The mattress pads shall be manufactured in accordance with all operations specified in table I. The contractor is not required to follow the exact sequence of operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing operations requirements

No.	Requirements	Stitch type	Seams and stitching type	Stitches per inch	Thread: Needle	Thread: Bobbin or looper
1.	Cutting.					
	a. The cover shall be cut with no piecing seams on either face.					
	b. The binding shall be cut on the bias, not less than 1 9/16 inches wide.					
	c. The polyester batting shall be trimmed on all four sides.					
2.	Quilting.					
	a. Position polyester batting padding between two cover pieces.					
	b. Quilting shall be accomplished with either zig-zag or criss-cross (diamond) stitching as specified below.	301	-	5-9	A	A
	(1) Zig-zag. The horizontal distance between the parallel rows of stitches shall be 1 ± 1/16 inch. The length of the row of stitches in each direction before changing direction shall be 1 7/8 inches ± 1/8 inch (see figure 1 (A)).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seams and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
2.	Quilting - Continued					
	(2) Criss-cross (diamond). The distance between the horizontal points shall be 2 inches ± 1/8 inch and the distance between the vertical points shall be 3 1/8 inches ± 1/8 inch; (i.e., the diamond shaped by criss-cross stitching shall measure 2 inches ± 1/8 inch parallel to the filling direction of the cloth). The stitching forming the sides of the diamond shall be 1 7/8 inches ± 1/8 inch (see figure 1 (B)).					
3.	Binding.					
	a. Bind the edges of the mattress pad with a continuous binding with the raw edges of the binding turned under and stitched 1/8 ± 1/16 inch from turned edge catching all raw edges in the stitching. The binding shall begin on the short side at a corner and continue around the pad, finishing not less than 6 inches beyond the starting end on the short side of pad.	301	BSc-1	6-10	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing operations requirements - Continued

No.	Requirements	Stitch type	Seams and stitching type	Stitches per inch	Thread	
					Needle	Bobbin or looper
3.	Binding - Continued					
	b. The labels shall be centered, positioned adjacent to each other on one end of the pad with the top or bottom edges caught in the binding seam.	301	BSc-1	6-10	A	A
4.	Cleanness.					
	a. Remove all spots and stains.					
	b. Trim all loose thread ends.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

3.7.1 Figure 1. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between this specification and the figure, this specification shall govern.

3.8 Labels. Each mattress pad shall have an identification label and a state label attached to one end of the pad.

3.8.1 Identification label. The identification label shall conform to type VI, class 5 of DDD-L-20 except that the legend and size of characters shall be as specified below:

Legend	Size of character (inches), minimum
Nomenclature	1/8
Contract number	3/32
NSN	3/32
Textile Fiber Products Identification Act information	3/32
Manufacturer's name	3/32

3.8.2 State label. The state label shall conform to the legal requirements of the state in which the mattress pads are manufactured.

3.9 Workmanship. The mattress pads shall conform to the quality of product established by this specification, and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, when commercial polyester batting is used as filler materials for the pads, a contractor's certificate of compliance shall be submitted and will be acceptable for the stated requirements listed below:

Component (commercial bonded polyester batting)	Requirement paragraph
Weight	3.4.2
Thickness	3.4.2
Approved bonding agent	3.4.2
Concentration of bonding agent	3.4.2

Upon request, the certificate of compliance shall be accompanied by actual test, inspection, or other verifiable data.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

4.4.2 In-process inspection. Inspection of sub-assemblies shall be made to ascertain that construction details that cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance.

4.4.3 End item visual examination. The end item shall be examined for the defects listed in table II. The lot size shall be expressed in units of mattress pads. The sample unit shall be one mattress pad. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0 for major defects and 10.0 for total (major and minor combined) defects.

TABLE II. End item visual defects

Examine	Defect	Classification	
		Major	Minor
Cloth (sheeting)	Any hole, cut, tear, mend, burn, or weak place	X	
	Objectionable or rancid odor	X	
	Cloth not as specified	X	
	Three or more contiguous broken or missing warp or filling threads	X	
	Two contiguous broken or missing warp or filling threads		X
	Loose or weakening slub		X
Cleanness	Any spot or stain, more than 1/4 inch square in area, clearly noticeable at a distance of 6 feet		X
Cover	Contains piecing seams on either face	X	
Quilting	Any thin place devoid of batting 2 inches square or more in area	X	
	Any thin place devoid of batting, more than 1 inch square in area, but less than 2 inches square in area		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Quilting - continued	Three or more thin places devoid of batting regardless of area	X	
	Any furrow, lump, or bulge resulting from uneven or improper distribution of the batting	X	
	Four or more untrimmed thread ends or loose threads, 1/4 inch or more in length		X
	Surface twisted, pleated, wavy, or puckered	X	
	Any pleat regardless of area, 8 inches or more in length and 1/4 inch or more in depth at widest point, or any pleat not within 5 inches from any edge extending more than 2 inches in length	X	
	Three or more pleats less than 8 inches in length and 1/4 inch or more in depth at widest point regardless of area per pad		X
	Needle chew	X	
	A run back of more than 1 inch of broken or missing stitches in the quilting	X	
	Any area evidencing complete bobbin change		X
	One or more rows of stitching omitted in quilting	X	
	NOTE: Row of stitches is any adjoining 1 7/8 inches ± 1/8 inch segment of either the zig-zag or criss-cross sewn pattern.		
	Stitches per inch:		
	Two or more stitches less than the number specified	X	
	One stitch more or less than the number specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Binding	Not cut in bias direction	X	
	Width not as specified (may be determined prior to stitching)	X	
	Torn or chewed	X	
	Not one continuous length per pad		X
	Closing end extends less than 6 inches beyond the starting end		X
Seams and stitching	Binding not seamed with seam type BSc-1		X
	Not stitch type 301 throughout		X
	Stitching margin of binding less than 1/16 inch or more than 3/16 inch		X
	Binding seam does not begin at corner on short side of pad		X
	Binding sewn with less than 6 stitches per inch		X
	Binding sewn with more than 10 stitches per inch		X
	Any open seam or run-off more than 1 inch in length	X	
	Any open seam or run-off 1 inch or less in length		X
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more consecutive skipped or run-off stitches occur.		
	Edge of pad not securely caught in binding		X
	Edge of pad not fully inserted into binding after stitching		X
	Any raw edge of binding more than 1/2 inch in length		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Seams and stitching - continued	Three or more raw edges of binding per pad up to and including 1/2 inch in length		X
	Raw edge of pad covering, over 2 inches in length		X
	Two or more raw edges of pad covering, up to and including 2 inches in length		X
	Any raw edge of the pad covering regardless of length, not caught in binding stitching	X	
	NOTE: This examination will be made by turning back the edge of the binding at the raw edge locale and determining visually whether the pad covering is caught in the binding stitches.		
	Stitch tension loose, resulting in a loosely secured seam or looped stitches		X
	Stitch tension tight, stitches break when normal strain is applied to the seam or stitching		X
	NOTE: Puckering is evidence of tight tension		
Quilting stitching	More than 1 1/2 inches of broken or missing stitches in quilting	X	
Stitching ends	Ends of stitching not secured as specified (except when caught in other seams or stitching)		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects - Continued

Examine	Defect	Classification	
		Major	Minor
Thread breaks, skipped or run-off stitches (unless otherwise classified herein)	Overstitched less than 1 inch in each direction beyond the defective stitching area		X
NOTE:	Thread breaks, two or more consecutive skipped or run-off stitches not overstitched shall be classified as open seams.		
	Quilting dimensions not in accordance with table I.		X
Labels	Missing, misplaced, incomplete, incorrect, or illegible	X	

4.4.4 End item dimensional examination. Each mattress pad examined for dimensions shall be laid in a flat position without tension. The length and width shall be the average of three measurements taken in each direction. Any average less or more than the specified length or width (including permitted tolerances) for the size required in 3.5 shall be classified as a defect. The lot size shall be expressed in units of mattress pads. The sample unit shall be one finished mattress pad. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 Flammability testing. Flammability tests shall be performed in accordance with all the provisions of FF-4-72 (16 CFR Part 1632). A contractor's certificate of compliance shall be furnished and will be accepted for the stated requirements. Certification shall include material details used to meet the standard.

4.4.6 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container Polyethylene bag heat-sealed seam open, noncontinuous or crooked; vent holes missing or greater than 1/4 inch diameter Incorrectly fabricated bag Alternate polyethylene bag not provided with tuck or reverse flap
Content	Number of polyethylene bag unit packs per shipping container is more or less than required

4.4.7 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Packaging shall be level A or Commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each pad shall be neatly folded to measure approximately 18 by 25 inches. The folded pad shall then be unit packed in a close-fitting flat or square style clear polyethylene film bag that is 0.00125 inch thick (± 20 percent tolerance). The bag may be fabricated from polyethylene film, tubing, or sheeting. The polyethylene bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and to the formed edges of the bag. A 1/4-inch maximum diameter hole shall be made at any two corners of each polyethylene bag to allow the excess air to escape. The bag shall be closed by means of a heat seal or pressure-sensitive tape. Closure shall be made as close as possible to the open end. Prior to or during the closure operation, excess air within the bag shall be expelled. As an alternative, the polyethylene bag may be of the tuck in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.2 Commercial. Each pad shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Eighteen size 1 or twelve size 2 pads, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style OSC-L (minimum 3-inch overlap), grade V2s of PPP-B-636. The inside of each fiberboard container shall be fitted with a liner conforming to type CF, class weather-resistant, variety DW, grade V15c, of PPP-B-636. Level A unit packs shall be packed flat, eighteen size 1 or twelve size 2 in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 25 1/2 inches in length, 18 1/2 inches in width, and 27 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.6. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Eighteen size 1 or twelve size 2 pads, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style OSC-L (minimum 3-inch overlap), type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, eighteen size 1 or twelve size 2 in depth within a shipping container. Inside dimensions of each shipping container shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

approximately 25 1/2 inches in length, 18 1/2 inches in width, and 27 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.6.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.6.

5.2.3 Commercial packing. Pads, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), pads packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 90 in accordance with appendix of MIL-STD-147.

5.4 Marking.

5.4.1 Civil agencies. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with FED-STD-123 or ASTM D 3951, as applicable.

5.4.2 Military requirements. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.4.2.1 Polyethylene bagged packages. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit easy identification.

6. NOTES

6.1 Intended use. The mattress pads are intended for use on beds by military and nonmilitary agencies for the protection of mattresses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should exercise any desired option offered herein and procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2.1).
c. When a first article sample is required (see 3.2, 4.3, and 6.3).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Sample. For access to samples, address the procuring office issuing the invitation for bids.

6.5 Civil agency packaging. When level B packaging requirements are specified for civil agency procurements, the requirements in 5.1.1 shall apply.

6.6 Bonding agents. Approval of bonding agents for use in battings covered by this specification is the responsibility of the U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014. Approval is based on more extensive evaluations, including those of toxicity, which are not set forth in the specification. Because of the time necessary to conduct full evaluation, only those bonding agents already approved and so listed in the invitation for bids or request for proposal shall be considered acceptable for the related procurement.

6.6.1 Submittal for approval. Request for approval should be submitted to the U.S. Army Natick Research, Development, and Engineering Center, attention of STSNL-VT. It should be accompanied by approximately 5 square yards of a minimum of 2 ounces per square yard polyester batting manufactured with the proposed bonding agent together with applicable test data. Information is to be furnished regarding the commercial designation and chemical description of the bonding agent. (Approved lists will indicate only the commercial designation.) Chemical identification with products already approved should

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

be made, if applicable, and any available data on skin irritancy or toxicity should be submitted. If applicable, a statement should be included that as used the resin is well cured and that no materials with known high toxicity are used prior to cure.

6.7 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.4).

6.8 Subject term (key word) listing.

Bedding
Mattress
Pad, mattress

MILITARY INTERESTS:

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review Activities:

Army - MD
Navy - MS
Air Force - 82

User Activity:

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

PREPARING ACTIVITY

Army - GL

Project No. 7210-0272

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

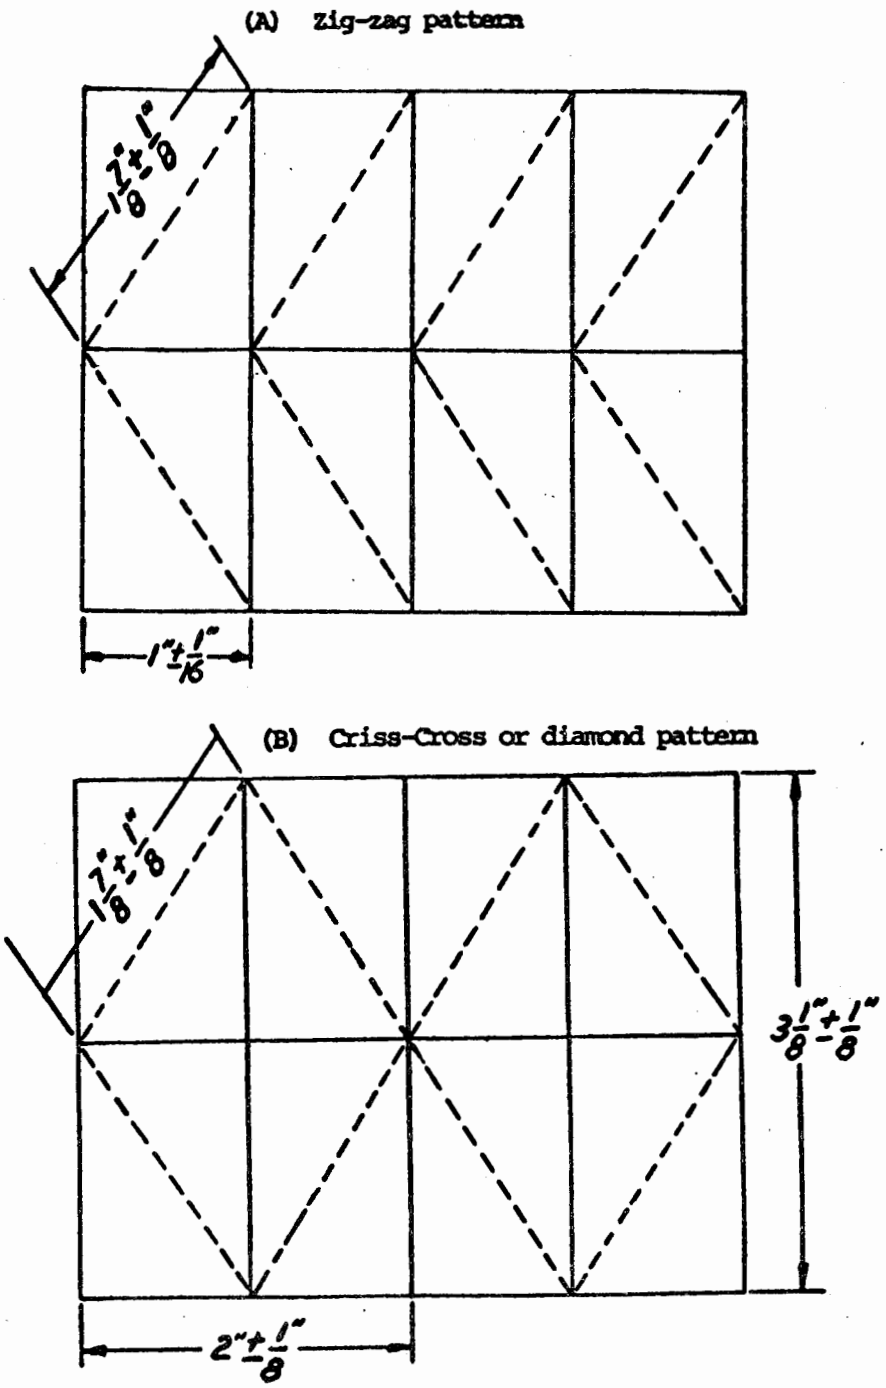


Figure 1. Quilting designs

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DDD-P-56E	Pad, Mattress, Polyester Batting, Quilted, White

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK

(Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:31Z
Check the source to verify that this is the current version before use.