MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CLASS I

(COAXIAL, SERIES TWIN), TYPE UG-1253/U

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-3655.

THIS SPECIFICATION SHEET INACTIVE FOR DESIGN AFTER 1 July 1977.

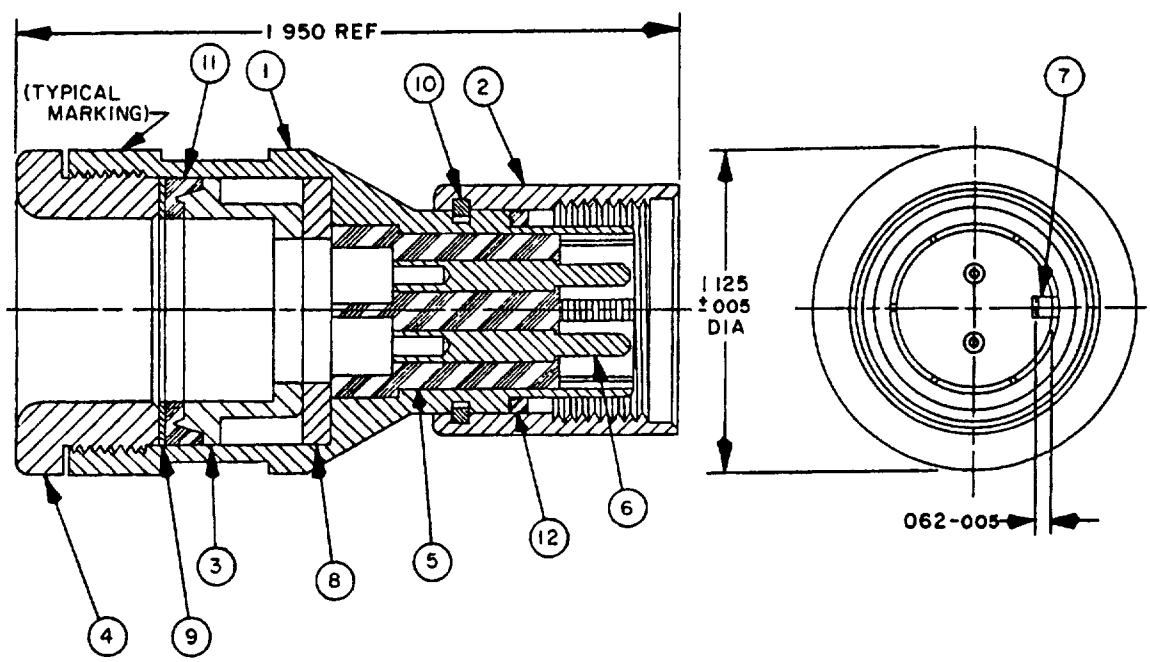


FIGURE 1. Type UG-1253/U electrical plug connector.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.



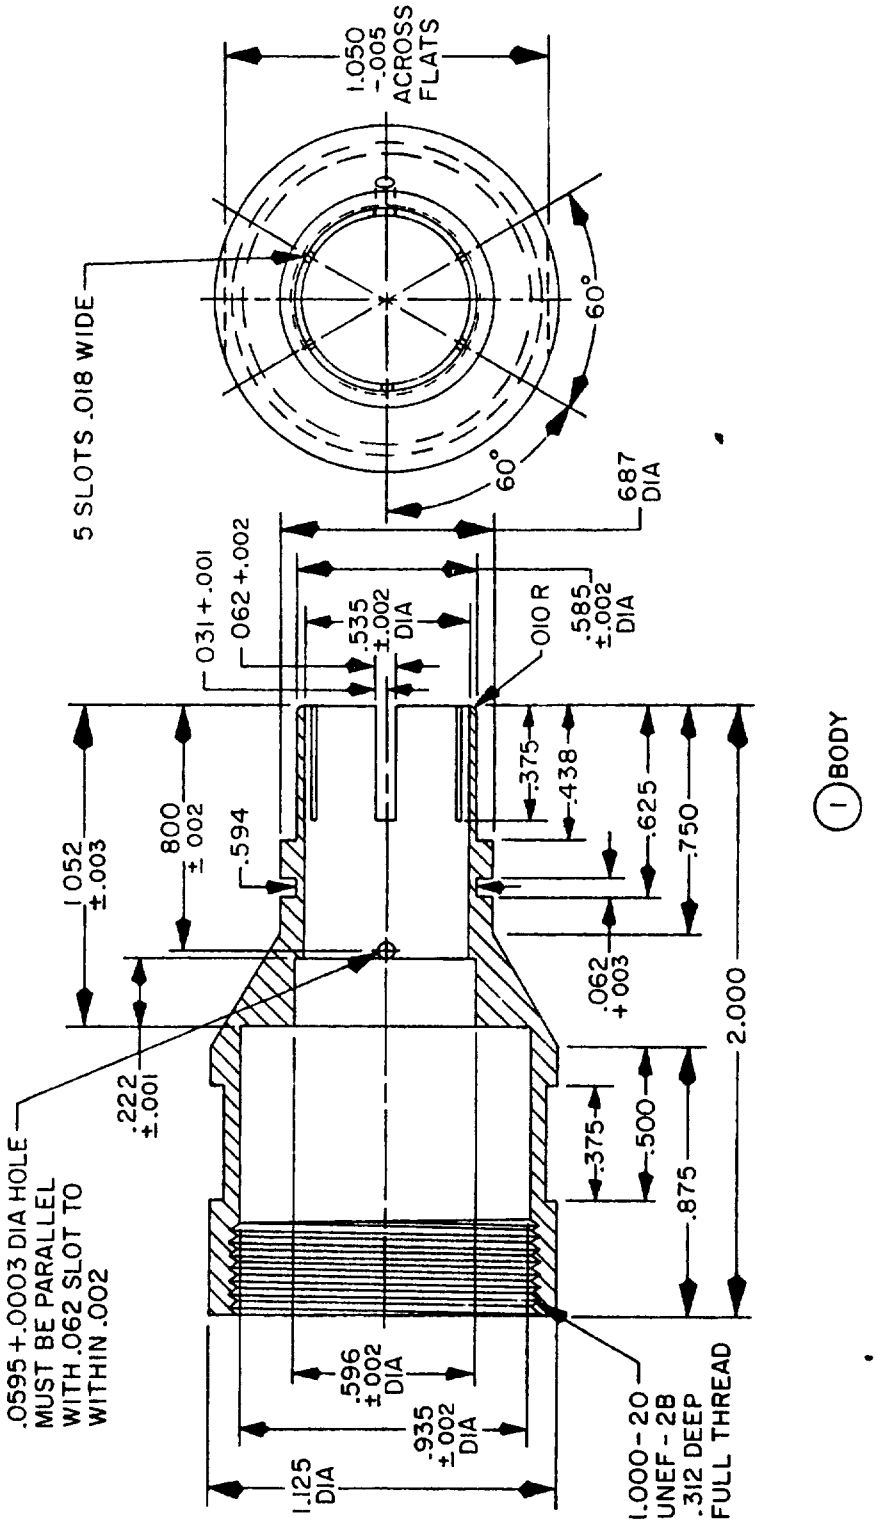


FIGURE 1. Type UG-1253/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

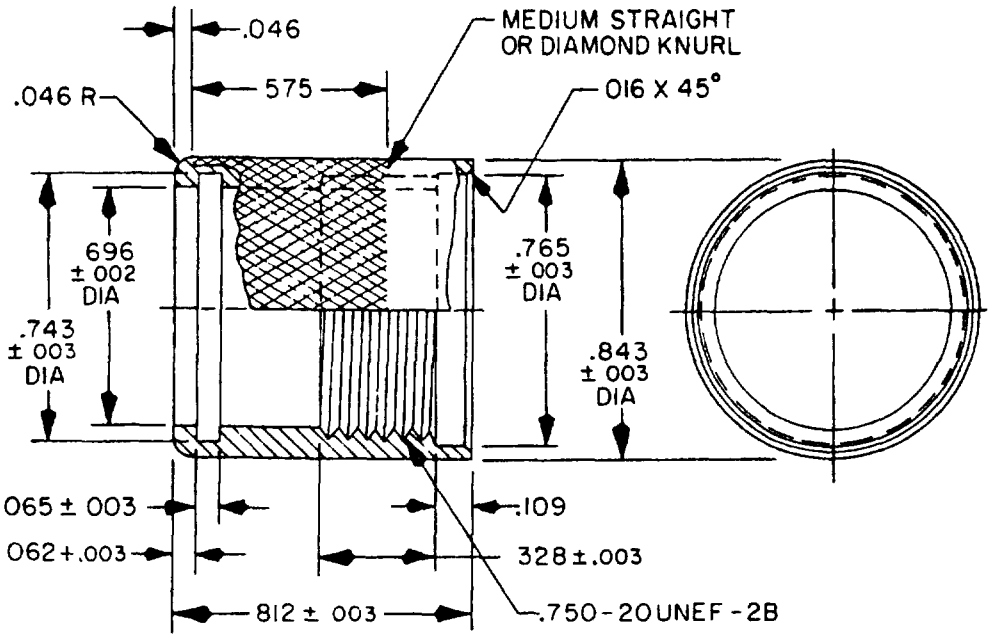

(2) COUPLING NUT

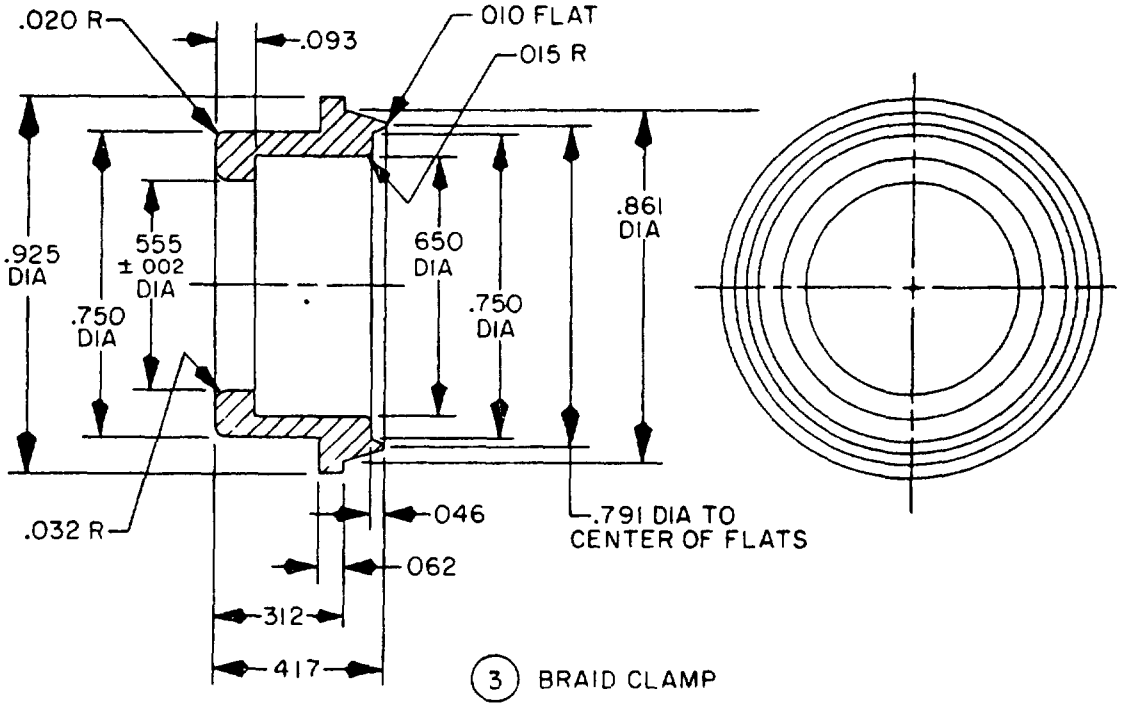

(3) BRAID CLAMP

FIGURE 1. Type UG-1253/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

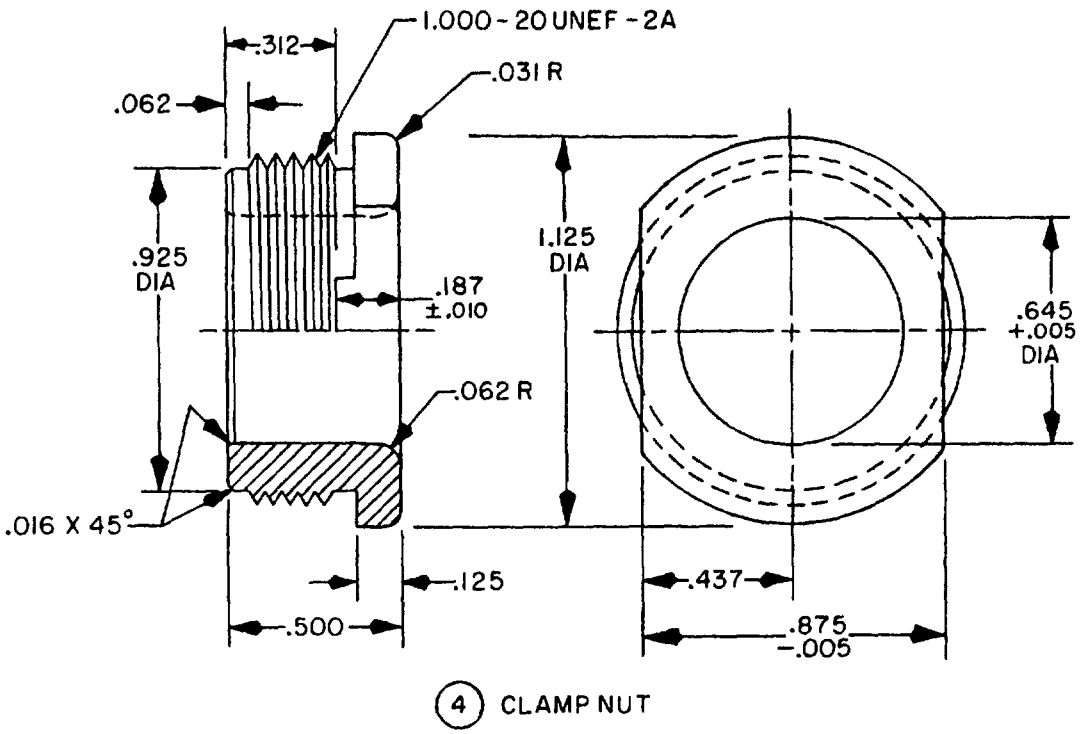


FIGURE 1. Type UG-1253/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.



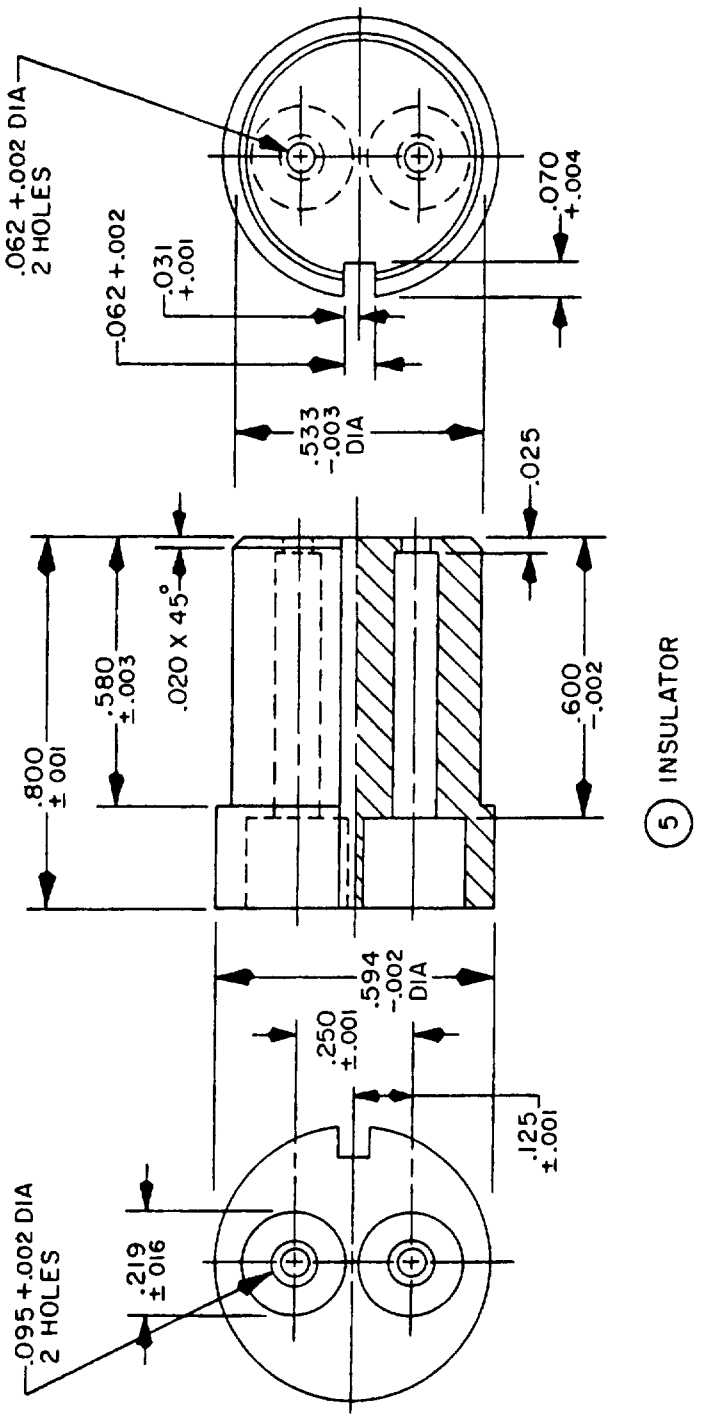


FIGURE 1. Type UG-1253/U electrical plug connector - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

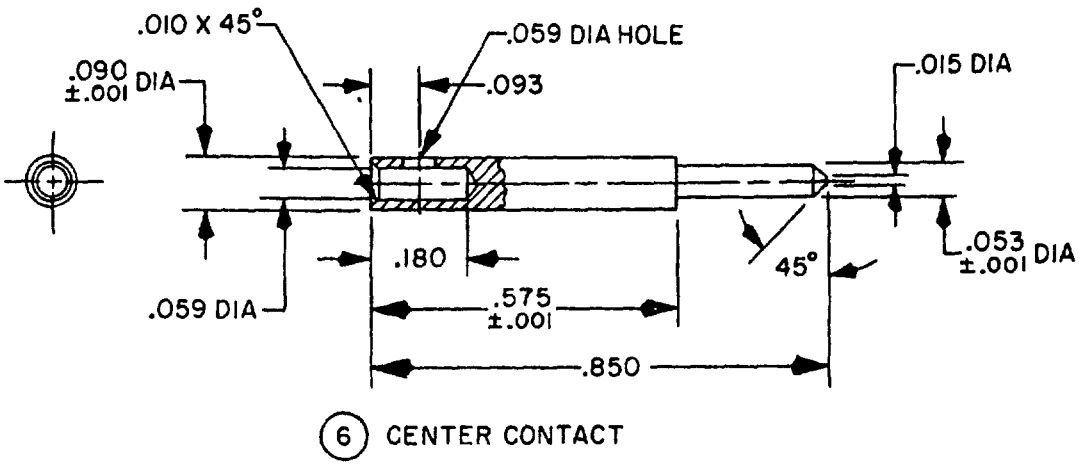

6 CENTER CONTACT

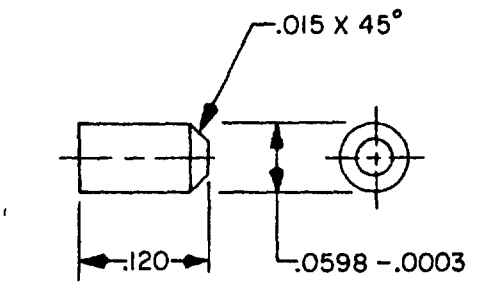


7 PIN

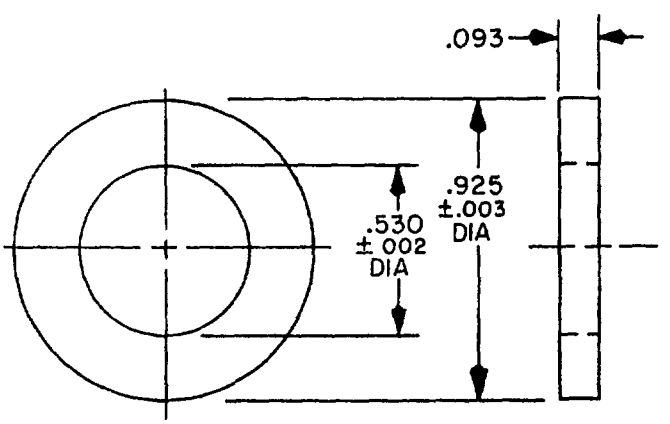

8 HOLDING WASHER

FIGURE 1. Type UG-1253/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

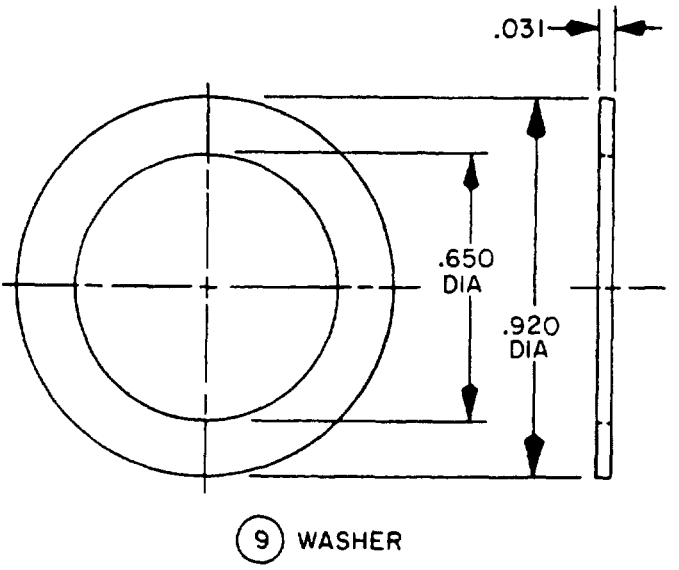

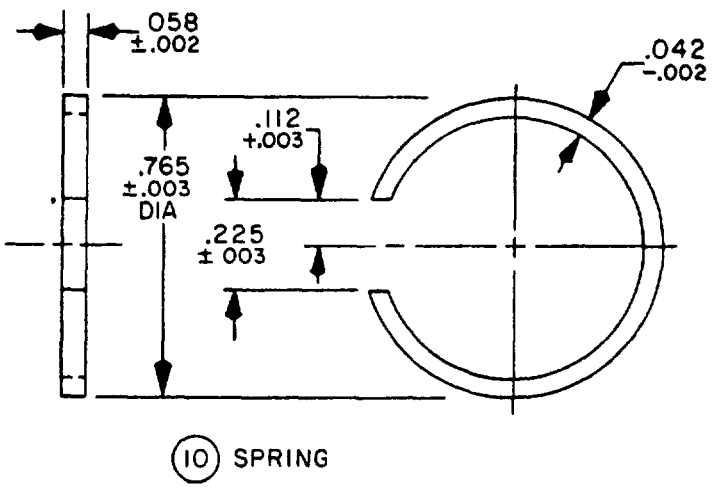
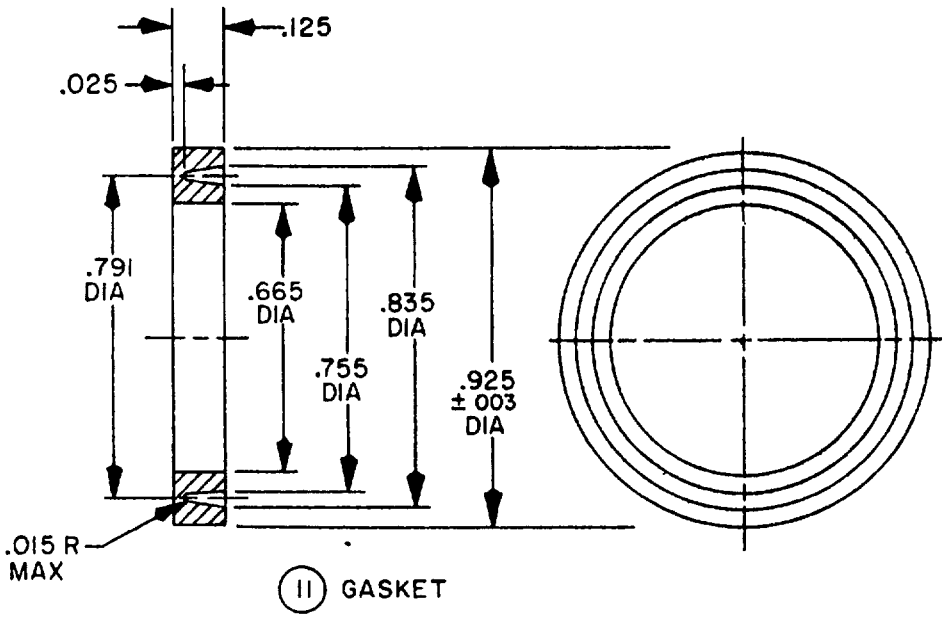


FIGURE 1 Type UG-1253/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.



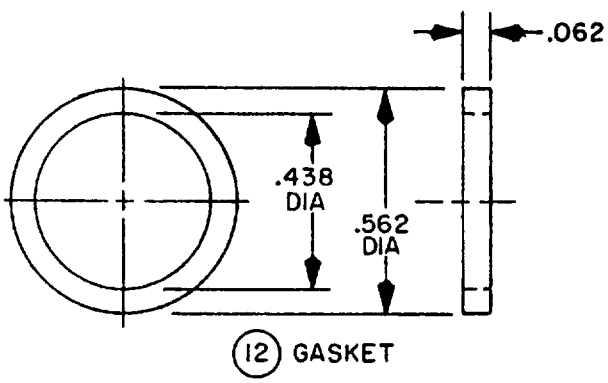


FIGURE 1. Type UG-1253/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.


Item	Description	Material	Quantity
1	Body	Brass	1
2	Coupling nut	Brass	1
3	Braid clamp	Brass	1
4	Clamp nut	Brass	1
5	Insulator	Plastic Rod	1
6	Center contact	Brass	2
7	Pin	Brass	1
8	Holding washer	Brass	1
9	Washer	Brass	1
10	Spring	Phosphor Bronze	1
11	Gasket	Silicone Rubber	1
12	Gasket	Synthetic Rubber	1

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0003	.008	.058	1.47	.222	5 64	.585	14 86	835	21.21
.001	.03	.059	1 50	225	5 72	594	15.09	.843	21 41
.002	.05	.0595	1 511	.250	6.35	.596	15.14	.850	21.59
.003	.08	.0598	1 519	.312	7.92	.600	15.24	.861	21.87
.004	.10	.062	1 57	.328	8 33	625	15.88	.875	22.22
.005	.13	.065	1.65	.375	9 52	.645	16.38	.920	23.37
.010	25	.070	1.78	.417	10.59	.650	16.51	.925	23.50
015	.38	.090	2.29	.437	11.10	.665	16.89	935	23.75
.016	.41	.093	2.36	.438	11 13	687	17.45	1 000	25.40
.018	.46	.095	2.41	.500	12.70	.696	17.68	1.050	26.67
.020	51	.109	2.77	.530	13.46	.743	18.87	1 052	26.72
025	64	.112	2.84	533	13.54	.750	19.05	1.125	28.58
031	.79	.120	3 05	.535	13 59	.755	19.18	1.950	49.53
.032	81	125	3 18	.555	14 10	.765	19 43	2.000	50.80
042	1.07	.180	4.57	.562	14 27	.791	20.09		
.046	1.17	.187	4.75	.575	14 60	.800	20.32		
.053	1.35	.219	5 56	.580	14.73	.812	20.62		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. All diameters shall be concentric within .004 TIR.

FIGURE 1 Type UG-1253/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

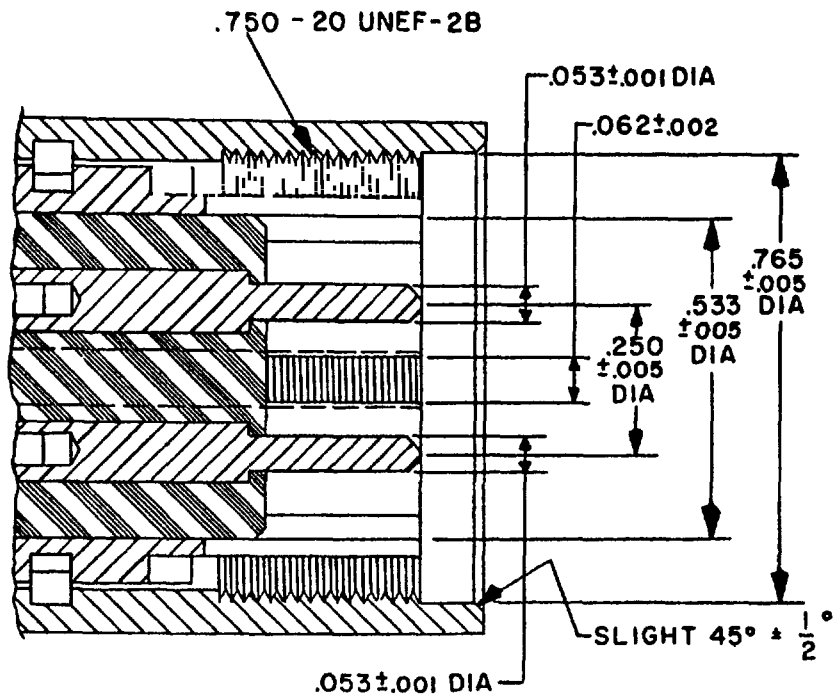

INCHES	MM	INCHES	MM
.001	.03	.250	6.35
.002	.05	.533	13.54
.005	.13	.750	19.05
.053	1.35	.765	19.43
.062	1.57		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Visual mating requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

(B) ENGINEERING DATA·

Nominal impedance 95 ohms

Frequency range DC to 500 MHz, maximum.

Voltage rating 500 volts peak at sea level.

Mating connector M3655/2-0422.

Intended use Type M3655/12-1253 electrical connector is designed for use with radio-frequency cable RG-181/U. MIL-C-17/104, covering the RG-181/U, was canceled 22 May 1967

(B) REQUIREMENTS·

Design and construction See figures 1 and 2.
Metal parts All metal parts shall have silver plating of not less than 0.0002 inch thickness and of sufficient smoothness and density to withstand the salt spray (corrosion) test. Silver plating shall be in accordance with QQ-S-365

Force to engage/disengage
Torque Not applicable.
Longitudinal force Not applicable.

Coupling proof torque 15 inch-pounds, minimum.

Mating characteristics (see figures 1 and 2 for dimensions)·
Outer contact
Test ring I.D.· .583 inch, maximum.
Test ring finish 16 microinches.
Insertion force 15 pounds, maximum when inserted a minimum of .125 inch.
Contacts with slotted members· Shall contact a .605 inch minimum diameter ring within .031 inch of their tip ends

Permeability Applicable.

Hermetic seal Not applicable

Leakage: Not applicable

Insulation resistance 5 x 10^9 ohms, minimum.

Contact insulator captivation Not applicable

Salt spray (corrosion) Applicable

Connector durability Applicable

Contact resistance (milliohms, maximum)

	Initial	After environment
Inner conductor contacts	2.67	3.50
Outer conductor contacts	.38	Not applicable
Braid to body	.20	Not applicable

Dielectric withstanding voltage 1,500 Vrms, minimum, at sea level.

Vibration, high frequency Applicable.

Shock (specified pulse) Not applicable.

Temperature cycling Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2 x 10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force: 75 pounds, minimum.

Coupling nut retention: Applicable.

Marking: In accordance with MIL-C-3655.
Part number: M3655/12-1253.

Qualification Not required.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3086-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/12B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN. DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

☆ U S GOVERNMENT PRINTING OFFICE 1980—603-121/1841 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.