MIL-C-3655/7B
11 April 1990
SUPERSEDING
MIL-C-3655/7A
17 June 1977

MILITARY SPECIFICATION SHEET


CONNECTOR ADAPTER, CLASS II

(COAXIAL, SERIES TWIN), TYPE UG-1058/U

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the adapter described herein shall consist of this document and the latest issue of Specification MIL-C-3655

INACTIVE FOR NEW DESIGN

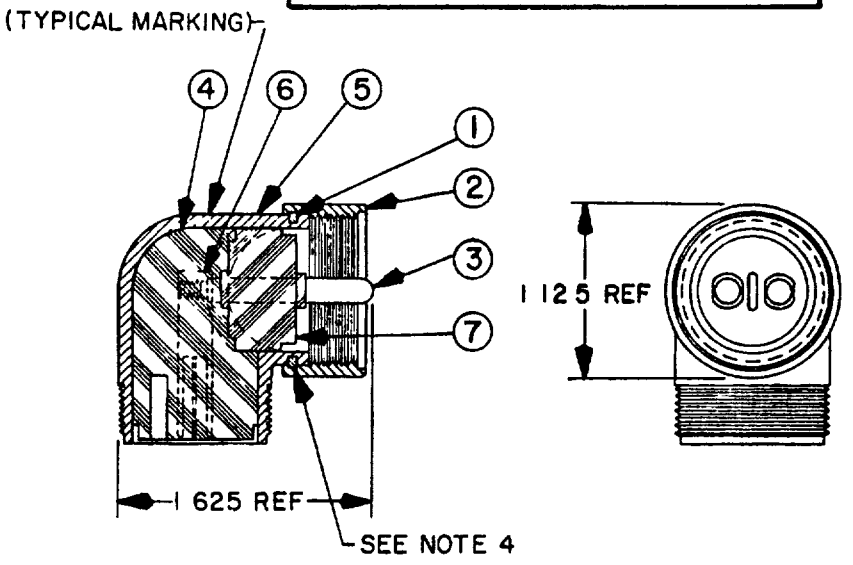

ASSEMBLY

FIGURE 1. Type UG-1058/U connector adapter.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.


Item	Description	Material	Quantity
1	Spring	Phosphor bronze	1
2	Coupling nut	Brass	1
3	Center contact	Brass	2
4	Insulator	Plastic	1
5	Body	Brass	1
6	Center contact	Copper beryllium	2
7	Insulator	Plastic	1

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.055	1.40	.203	5.16	.531	13.49	.938	23.83
.002	.05	.062	1.57	.210	5.33	.549	13.94	.968	24.59
.004	.10	.0625	1.588	.218	5.54	.562	14.27	1.000	25.40
.005	.13	.078	1.98	.224	5.69	.580	14.73	1.003	25.48
.010	.25	.093	2.36	.233	5.92	.610	15.49	1.004	25.50
.015	.38	.094	2.39	.250	6.35	.625	15.88	1.016	25.81
.016	.41	.111	2.82	.344	8.74	.718	18.24	1.046	26.57
.020	.51	.125	3.18	.375	9.52	.735	18.67	1.067	27.10
.028	.71	.156	3.96	.396	10.06	.750	19.05	1.093	27.76
.032	.81	.160	4.06	.400	10.16	.795	20.19	1.125	28.58
.046	1.17	.161	4.09	.406	10.31	.800	20.32	1.252	31.80
.0469	1.191	.172	4.37	.437	11.10	.810	20.57		
.047	1.19	.187	4.75	.4375	11.112	.900	22.86		
.050	1.27	.188	4.78	.500	12.70	.930	23.62		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Item 1 to be assembled with small amount of Dow-Corning compound No. 4, or equal.

FIGURE 1. Type UG-1058/U connector adapter - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

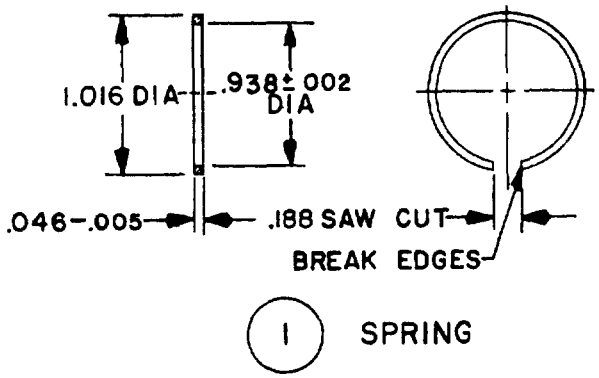

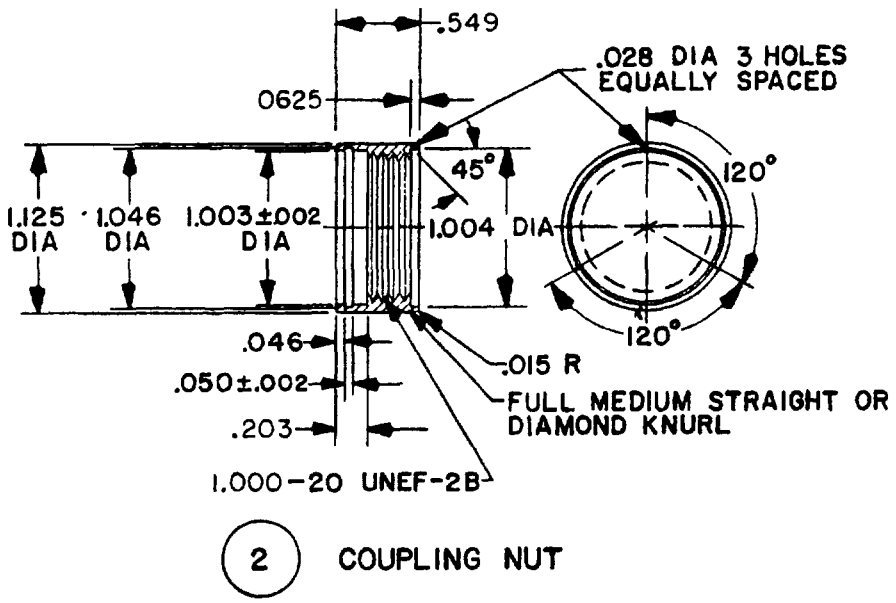
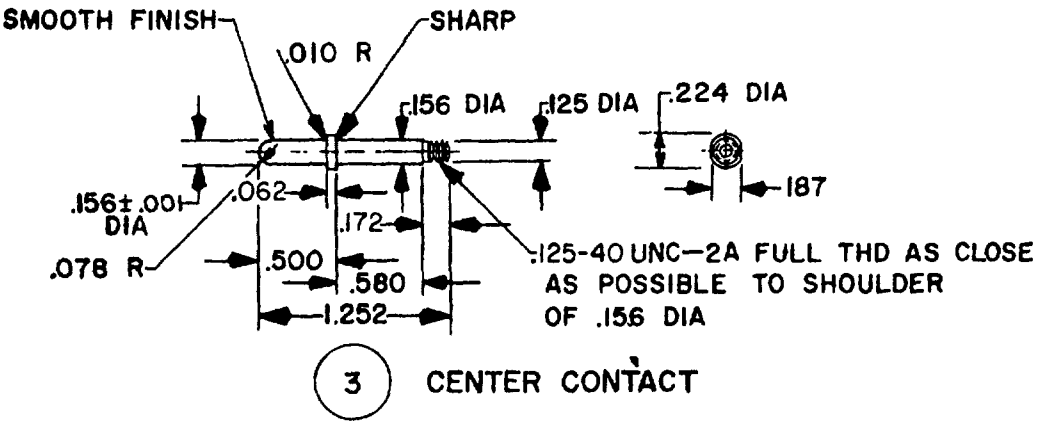


FIGURE 1. Type UG-1058/U connector adapter - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.





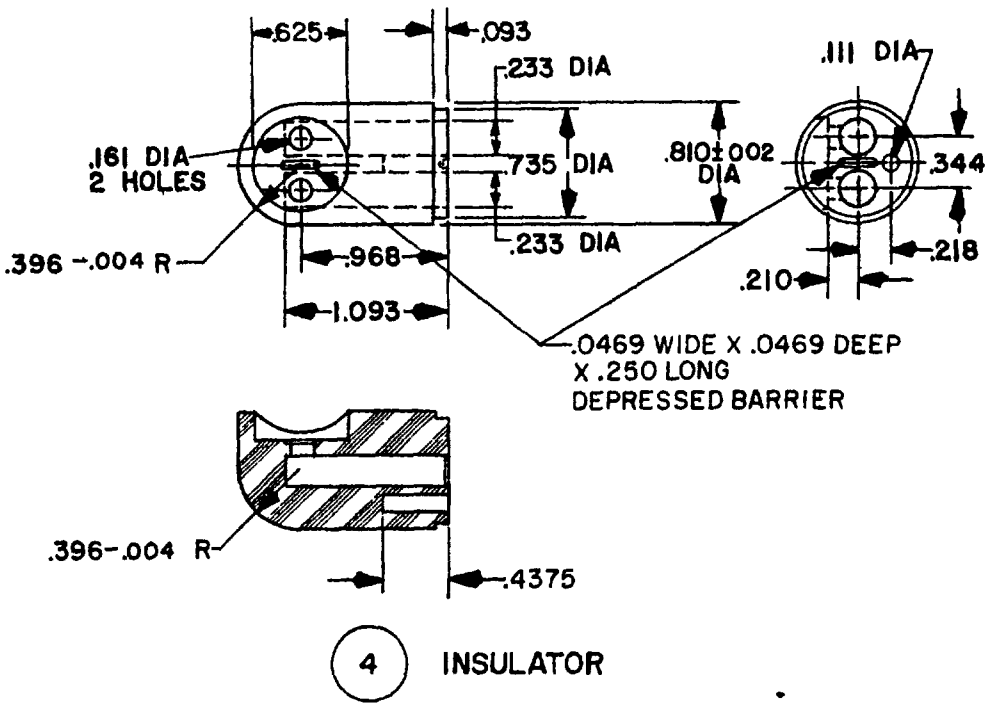


FIGURE 1. Type UG-1058/U connector adapter - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

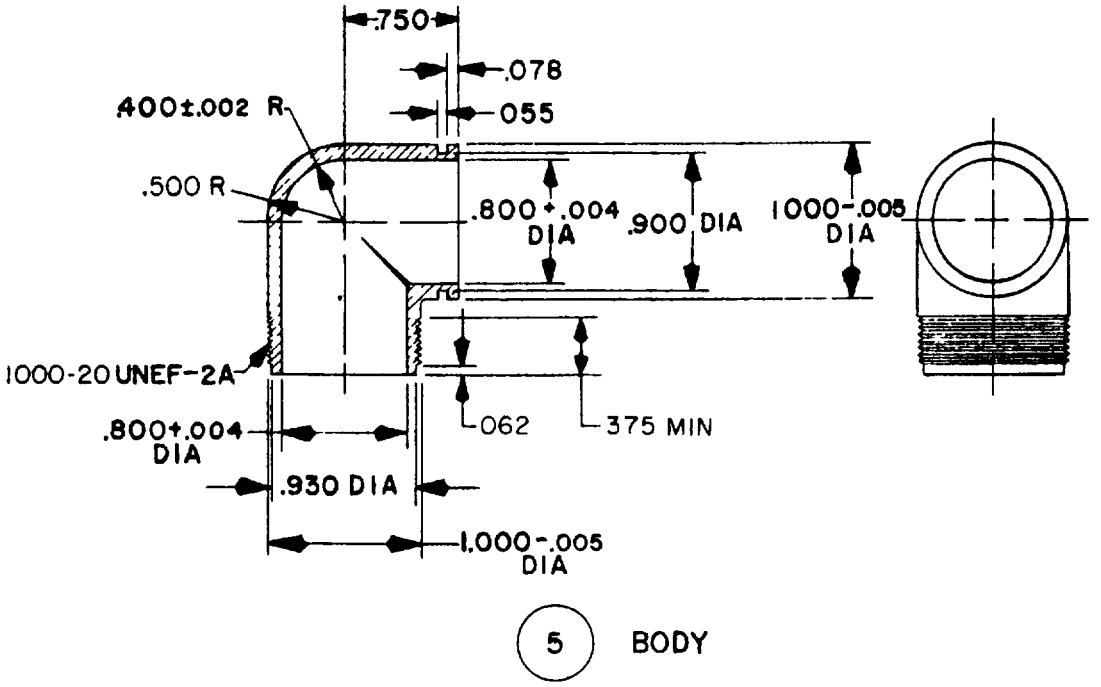

5 BODY

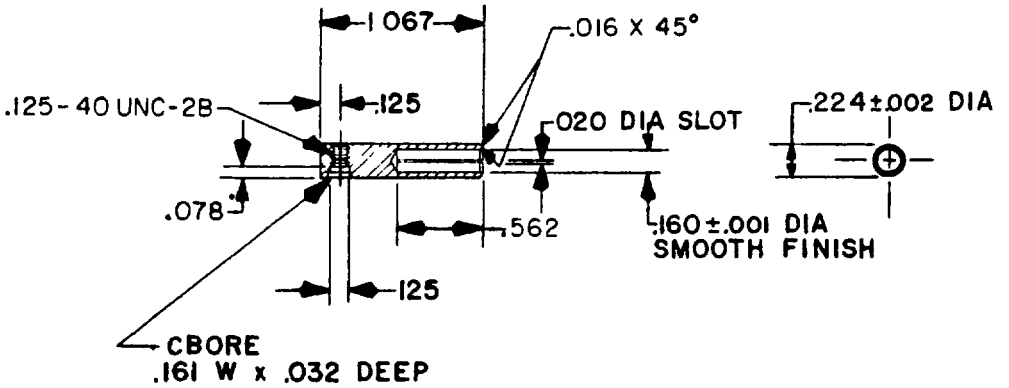

6 CENTER CONTACT

FIGURE 1 Type UG-1058/U connector adapter - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.


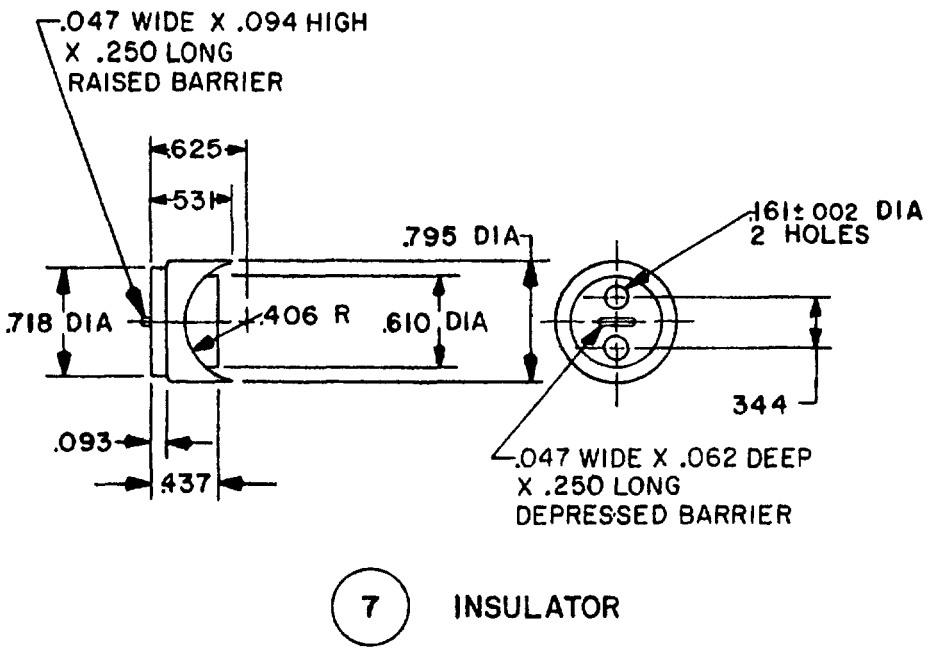


FIGURE 1. Type UG-1058/U connector adapter - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

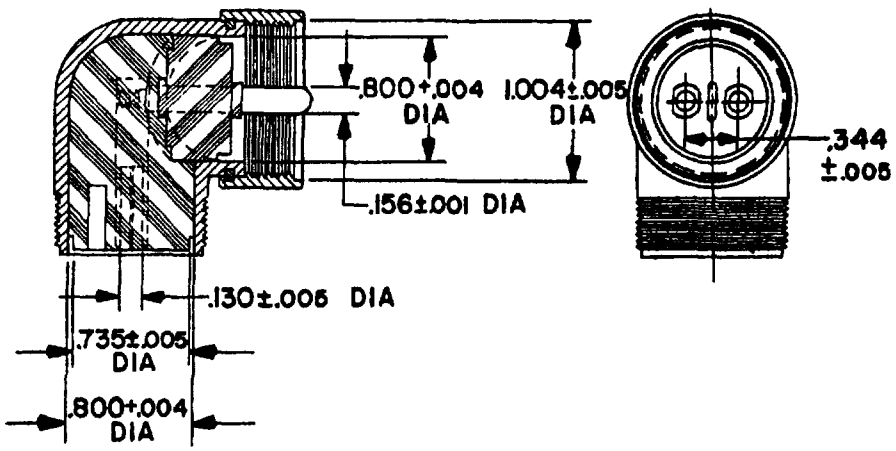

INCHES	MM	INCHES	MM
.001	.03	.344	8.74
.004	.10	.735	18.67
.005	.13	.800	20.32
.130	3.30	1.004	25.50
.156	3.96		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Visual mating requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

(B)ENGINEERING DATA:

Nominal impedance: 95 ohms.

Frequency range DC to 500 MHz, maximum.

Voltage rating: 500 volts peak at sea level.

Mating connector: M3655/6-1057.

(B)REQUIREMENTS:

Design and construction: See figures 1 and 2.
Metal parts: All metal parts shall have silver plating of not less than 0.0002 inch thickness and of sufficient smoothness and density to withstand the salt spray (corrosion) test. Silver plating shall be in accordance with QQ-S-365.

Force to engage/disengage:
Torque: Not applicable.
Longitudinal force: Not applicable.

Coupling proof torque: 15 inch-pounds, minimum.

Mating characteristics (see figures 1 and 2 for dimensions):
Center contact:
Oversize test pin: 0.159 inch diameter, minimum.
Test pin finish: 16 microinches.
Insertion depth. .250 inch, minimum.
Number of insertions: One.

Insertion force test:
Steel test pin diameter: .157 inch, minimum.
Test pin finish: 16 microinches.
Insertion depth: .125 inch, minimum.
Insertion force: 4 pounds, maximum.

Withdrawal force test:
Steel test pin diameter: .155 inch, maximum.
Test pin finish: 16 microinches.
Insertion depth: .125 inch, minimum.
Withdrawal force: 9 ounces, minimum.

Permeability: Applicable.

Hermetic seal: Not applicable.

Leakage: Not applicable.

Insulation resistance: 5 x 10^9 ohms, minimum.

Contact insulator captivation: Not applicable.

Salt spray (corrosion): Applicable.

Connector durability. Applicable.

Contact resistance (milliohms, maximum).

	Initial	After environment
Inner conductor contacts:	2.67	3.80
Outer conductor contacts:	.38	Not applicable
Braid to body:	.20	Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage 1,500 Vrms, minimum, at sea level.

Vibration, high frequency Applicable

Shock (specified pulse) Not applicable

Temperature cycling Applicable

Humidity Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2 x 10^8 ohms within 5 minutes after removal from the humidity chamber

Cable retention force Not applicable.

Coupling nut retention Applicable.

Marking In accordance with MIL-C-3655.
Part number M3655/7-1058.

Qualification Not required

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3086-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/7B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE XXXX
DoD-XXX ARMY
314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

US ARMY CORADCOM
ATTN: DRDCO-CM-DM
FT. MONMOUTH, NJ 07703

FOLD

☆ U S GOVERNMENT PRINTING OFFICE 1980—603-121/1839 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.