MIL-C-3650A
2 December 1960
SUPERSEDING
MIL-C-3650
18 December 1951

MILITARY SPECIFICATION

CONNECTORS, COAXIAL, RADIOFREQUENCY, SERIES LC

This specification has been approved by the Department of the Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force

1 SCOPE

1 1 Scope This specification covers weatherproof, series LC, radiofrequency, coaxial connectors, having a nominal impedance of 50 ohms (See 6.1 and 6 5)

1 2 Classification.

1.2.1 Type designation. The type designation of connectors is derived from the AN nomenclature system specified in Standard MIL-STD-196, and shall be as specified (See 3.1 and 6 2)

2. APPLICABLE DOCUMENTS

2 1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein

SPECIFICATIONS

Federal

L-P-590 - Plastic Compounds, Molding and Extrusion, Polyethylene
O-F-499 - Flux, Low Melting Point Silver Alloy Brazing
QQ-B-613 - Brass, Leaded and Non-Leaded, Plate, Rolled Bar, Sheet and Strip
QQ-B-626 - Brass, Leaded and Non-Leaded, Rods, Shapes, Forgings and Flat Products with Finished Edges (Bars, Flat Wire and Strips).
QQ-C-530 - Copper-Beryllium Alloy Bars, Rods, and Wire
QQ-C-533 - Copper-Beryllium Alloy Strip
QQ-P-330 - Phosphor Bronze Bars, Plates, Rods, Sheets, Strips, Flat Wire, and Structural and Special Shaped Sections
QQ-S-365 - Silver Plating (Electrodeposited)
QQ-S-561 - Solder, Silver
QQ-S-571 - Solder Lead Alloy, Tin Lead Alloy, and Tin Alloy. Flux Cored Ribbon and Wire, and Solid Form
PPP-B-566 - Boxes, Folding, Paperboard
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-591 - Boxes, Fiberboard, Wood-Cleated.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Boxes, Fiber.
PPP-B-665 - Boxes, Paperboard, Metal-Stayed (Including Stay Material).
PPP-B-676 - Boxes, Set-Up, Paperboard.
PPP-T-76 - Tape, Pressure-Sensitive Adhesive, Paper, Water Resistant.
PPP-T-97 - Tape, Pressure-Sensitive Adhesive, Filament Reinforced

Military

MIL-P-77 - Plastic Sheet and Plastic Rod, Thermosetting, Cast.
MIL-P-116 - Preservation, Methods of.
MIL-R-3065 - Rubber and Synthetic Rubber Compounds, General Purpose (Except Tires, Inner Tubes, Sponge Rubber, and Hard Rubber)
MIL-R-5847 - Rubber, Silicone, Low- and High-Temperature- and Tear Resistant
MIL-H-7199 - Heat Treatment of Copper-Beryllium Alloys, Process for
MIL-I-8660 - Insulating and Sealing Compound, Electrical
MIL-B-10377 - Box Wood, Cleated, Veneer, Paper Overlaid.
MIL-L-10547 - Liners, Case, Waterproof

STANDARDS

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S Military Property
MIL-STD-196 - Joint Electronics Type Designation System
MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

(For applicable MS military standards, see Supplement 1.)

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply

National Bureau of Standards

Handbook H28 - Screw-Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D. C)

Official Classification Committee

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Official Classification Committee, One Park Avenue, at 33rd Street, New York 16, N. Y.)

3. REQUIREMENTS

3.1 Military standards for individual connector types. All requirements specified herein apply to all types of connectors covered by applicable MS military standards. Details or exceptions applicable to individual types are specified on the MS military standards listed in Supplement 1 to this specification. In the event of any conflict between this specification and the individual MS military standards, the latter shall govern. (See 6.2.)

3.2 Material. Unless otherwise specified (see 3.1), the material shall be as specified herein. However, when a definite material is not specified, a material shall be used which will enable the connectors to meet the performance requirements of this specification. Acceptance or approval of any constituent material shall not be construed as a guaranty of the acceptance of the finished product.

3.2.1 Brass. Brass shall conform to composition 11, half-hard, of Specification QQ-B-613, or composition 22, half-hard, of Specification QQ-B-626, as applicable

3.2.2 Copper beryllium Copper beryllium shall conform to condition H of Specification QQ-C-530 or QQ-C-533, as applicable. Parts fabricated of copper beryllium shall be heattreated to condition HT after machining and forming. Heat treatment shall be in accordance with Specification MIL-H-7199.

3 2.3 Insulating and sealing compound. Insulating and sealing compound (see 3.3.3) shall conform to Specification MIL-I-8660.

3 2 4 Phosphor bronze Phosphor bronze shall conform to composition A of Specification QQ-P-330

3 2.5 Dielectric materials. Dielectric materials shall conform to the following

3.2 5.1 Polyethylene. Polyethylene shall conform to Specification L-P-590

3.2.5.2 Polystyrene. Polystyrene shall conform to type E-2 of Specification MIL-P-77.

3.2.6 Silicone rubber. Silicone rubber shall conform to class IIa, grade 50 or 60, of Specification MIL-R-5847, except that the oil-immersion test is not applicable.

3 2.7 Synthetic rubber. Synthetic rubber shall conform to grade RS515BFF of Specification MIL-R-3065.

3.2.8 Silver solder. Silver solder shall conform to class 1 of Specification QQ-S-561

3 2.8.1 Flux. Flux used while silver soldering shall conform to Specification O-F-499.

3.2.9 Soft solder. Soft solder shall conform to composition Sn60 of Specification QQ-S-571.

3 3 Design and construction. Connectors shall be of the design, construction, and physical dimensions specified. (See 3.1) Wherever feasible, parts having similar electrical characteristics may be combined (fabricated as a single piece) to simplify construction. Parts of unlike materials may be combined such as brass and copper beryllium, provided copper beryllium is used in the fabrication of the single-piece construction

3.3 1 Metal parts. Unless otherwise specified (see 3.1), all metal parts shall have a silver plating of not less than 0.0002 inch thick, and of sufficient smoothness and density to withstand the salt-spray (corrosion) test specified in 4 6 4. Silver plating shall be in accordance with Specification QQ-S-365. Dimensions of metal parts shall include the plating. (See 3.1)

3.3 2 Screw threads. Screw threads shall conform to Handbook H28, and shall have the specified fit after plating. (See 3 1.)

3 3.3 Insulators. Insulators shall have no visible flaws or cracks. A coating of insulating and sealing compound (see 3 2 3) shall be applied to the insulators prior to assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

3 3 4 Gage tests for contacts (see 4.6.1 1).

3 3 4.1 Center contacts (female). Center contacts shall meet the gage test specified in 4.6.1 1.1

3 3 4.2 Outer contacts Outer contacts shall meet the gage test specified in 4.6.1.1.2

3.3.5 Coupling nuts. After assembly, the coupling nut shall be free-finger-turning and shall not become detached from the connector body, when tested in accordance with 4 6.2.

3.4 Dielectric withstanding voltage (when applicable) When connectors are tested as specified in 4 6.3, there shall be no evidence of breakdown.

3 5 Salt spray (corrosion). When connectors are tested as specified in 4.6 4, there shall be no evidence of destructive corrosion or pitting Destructive corrosion shall be construed as any type of corrosion which in any way interferes with mechanical or electrical performance.

3 6 Marking. Connectors shall be marked in accordance with Standard MIL-STD-130, with the type designation and the manufacturer's code symbol. Marking shall be in depressed characters approximately 3/32 inch high, in the place specified. (See 3.1.)

3 7 Workmanship Connectors shall be processed in such a manner as to be uniform in quality and shall be free from sharp edges and burrs, except where sharp edges are required for mechanical or electrical reasons All solder joints shall be thoroughly cleaned

4 QUALITY ASSURANCE PROVISIONS

4 1 Responsibility for inspection

4.1 1 Supplier The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government, as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4 1 1.1 Test equipment and inspection facilities. Test equipment and inspection facilities shall be of sufficient accuracy, quality, and quantity to permit performance of the required inspection The supplier shall establish calibration of inspection equipment to the satisfaction of the Government.

4.1.1 2 Additional inspection. Nothing specified herein shall preclude the supplier from taking such additional samples and making such additional inspection as he may deem necessary or desirable to assure conformance of the connectors to this specification.

4 1.2 Government. Acceptance of the connectors shall be based upon verification by the Government of the supplier's compliance with the requirements of this specification The Government may, at its option, repeat any or all of the inspection specified herein. (See 6.3)

4.2 Classification of inspection. The examination and testing of connectors shall be classified as follows:

(a) Component-materials inspection. (See 4.3.)
(b) Acceptance inspection (See 4 5.)
    1. Inspection of product for delivery (See 4.5.1.)
    2. Inspection of preparation for delivery. (See 4.5.2.)

4 3 Component-materials inspection. Component-materials inspection shall consist of verification that the component materials listed in table I, used in fabricating the connectors, are in accordance with the applicable referenced specifications or requirements prior to such fabrication.

4.4 Inspection conditions. Unless otherwise specified herein, all inspection shall be made at room ambient temperature, relative humidity, and pressure.

4.5 Acceptance inspection.

4.5.1 Inspection of product for delivery. Inspection of product for delivery shall consist of groups A, B, and C.

4.5 1.1 Inspection lot. An inspection lot, as far as practicable, shall consist of all the connectors of the same type designation, produced under essentially the same conditions, and offered for inspection at one time. However, at the discretion of the Government, an inspection lot may be composed of connectors representing a number of contracts or orders and may consist of different types of connectors in any of the following combinations

(a) Types UG-155/U and UG-287/U, latest versions
(b) Types UG-208/U and UG-216/U, latest versions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

Table I. Component-materials inspection.

Component material	Requirement paragraph	Applicable specification
Brass	3 2.1	QQ-B-613 or QQ-B-626
Copper beryllium	3.2.2	QQ-C-530 or QQ-C-533, and MIL-H-7199
Insulating and sealing compound	3.2.3	MIL-I-8660
Phosphor bronze	3.2.4	QQ-P-330
Dielectric materials		
Polyethylene	3.2.5.1	L-P-590
Polystyrene	3.2.5.2	MIL-P-77
Silicone rubber	3.2.6	MIL-R-5847
Synthetic rubber	3.2.7	MIL-R-3065
Silver solder	3.2.8	QQ-S-561
Flux	3.2.8.1	O-F-499
Soft solder	3.2.9	QQ-S-571

In combination lots, the number of samples of each different type of connector taken from the lot shall be in approximately the same proportion as the number of each type making up the lot.

4.5 1.2 Resubmitted lots. If an inspection lot is rejected, the supplier may replace it with a new lot, rework it to correct the defects, or screen out the defective units, and submit it again for inspection. Resubmitted lots shall be kept separate from new lots and shall be clearly identified as resubmitted lots. Resubmitted lots shall be inspected, using tightened inspection.

4.5.1.3 Group A inspection. Group A inspection shall consist of the examinations and test specified in table II, and shall be made on the same set of sample units, in the order shown

4.5.1.3.1 Sampling plan. Statistical sampling and inspection shall be in accordance with Standard MIL-STD-105 for ordinary inspection. The acceptable quality levels (AQL) shall be as specified in table II. Major and minor defects shall be as defined in Standard MIL-STD-105.

4.5.1.4 Group B inspection. Group B inspection shall consist of the examination of the physical dimensions specified on figures 1A to 1F, inclusive, as applicable.

4.5.1.4.1 Sampling plan. The sampling plan shall be in accordance with Standard MIL-STD-105 for small-sample inspection. Unless otherwise specified herein, normal inspection shall be used at the start of the contract. For small-sample reduced inspection, procedure R-1 shall be used. The AQL shall be 6.5 (percent defective), and the inspection level shall be L7 for normal and tightened inspection, and L5 for reduced inspection.

4 5.1.4.2 Disposition of sample units. Sample units which have passed all the group B inspection shall be delivered on the contract or order, if the lot is accepted.

4.5.1.4.3 Action in case of lot rejection. When an inspection lot is rejected on group B inspection, the supplier shall immediately investigate the cause of failure and take corrective action to assure that subsequent lots do not contain the same defect or defects.

4.5.1.5 Group C inspection. Group C inspection shall consist of the examinations and tests specified in table III

4 5 1 5 1 Sampling plan

4.5 1 5.1 1 Subgroup 1 (unassembled connectors) Six sample units of each type connector shall be selected from initial production, and thence from each month's production in accordance with table IV.

4.5 1.5.1 1 1 Physical dimensions To facilitate inspection of the physical dimensions, the sample units shall be divided into groups of identical piece parts. Inspection of the physical dimensions shall then be performed on a group-by-group basis

4.5.1 5.1.1.2 Acceptance criteria. The acceptance criteria shall be determined as follows:

(a) For each group of identical piece parts, the number of defects in any one particular dimension (eg, a flat washer would have 3 particular dimensions inside diameter, outside diameter, and thickness) shall not exceed the applicable acceptance number specified in table IV, with a total of not more than 10 defects per 100 dimensions for all piece parts in all groups combined

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

Table II. Group A inspection.

Examination or test	Requirement paragraph	Method paragraph	AQL (percent defective)	
			Major	Minor
Visual and mechanical examination	---			
Design and construction:		4.6.1		
Metal parts	3.3.1		1.0	4.0
Screw threads	3.3.2			
Coupling nuts	3.3.5	4.6.2		
Marking	3.6			
Workmanship	3.7	4.6.1		
Dielectric withstanding voltage (when applicable).	3.4	4.6.3	1.0	---

Table III Group C inspection.

Examination or test	Requirement paragraph	Method paragraph
Subgroup 1 (unassembled connectors)		
Visual and mechanical examination	---	4.6.1
Material	3.1 to 3.2.9, incl	Table I and 4.6.1
Design and construction,		
Physical dimensions [1]	3.1 and 3.3	4.6.1
Metal parts	3.3.1	
Screw threads	3.3.2	
Insulators	3.3.3	
Gage tests for contacts	3.3.4	4.6.1.1
Subgroup 2 (assembled connectors)		
Salt spray (corrosion)	3.5	4.6.4

[1] Only those dimensions related to piece parts (other than gage tests for contacts) shall be checked. (See 4.5.1.5.1.1.1)

Table IV. Sample size and acceptance number.

Number of connectors of a given type produced during a month	Sample size	Acceptance number [1]	
		Subgroup	Subgroup 2
1 to 1,000, incl	2	1	0
1,001 to 5,000, incl	6	1	0
5,001 to 15,000, incl	15	2	1

[1] For subgroup 1, see 4.5.1.5.1.1 to 4.5.1.5.1.1.2, inclusive, for subgroup 2, see 4.5.1.5.1.2.

(b) No defects shall be permitted for material, plating of metal parts, screw threads, and insulators, and no failures shall be permitted in the gage tests for contacts.

4.5.1.5.1.2 Subgroup 2 (assembled connectors) Six sample units of each type connector shall be selected from initial production, and thence from each month's production in accordance with table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

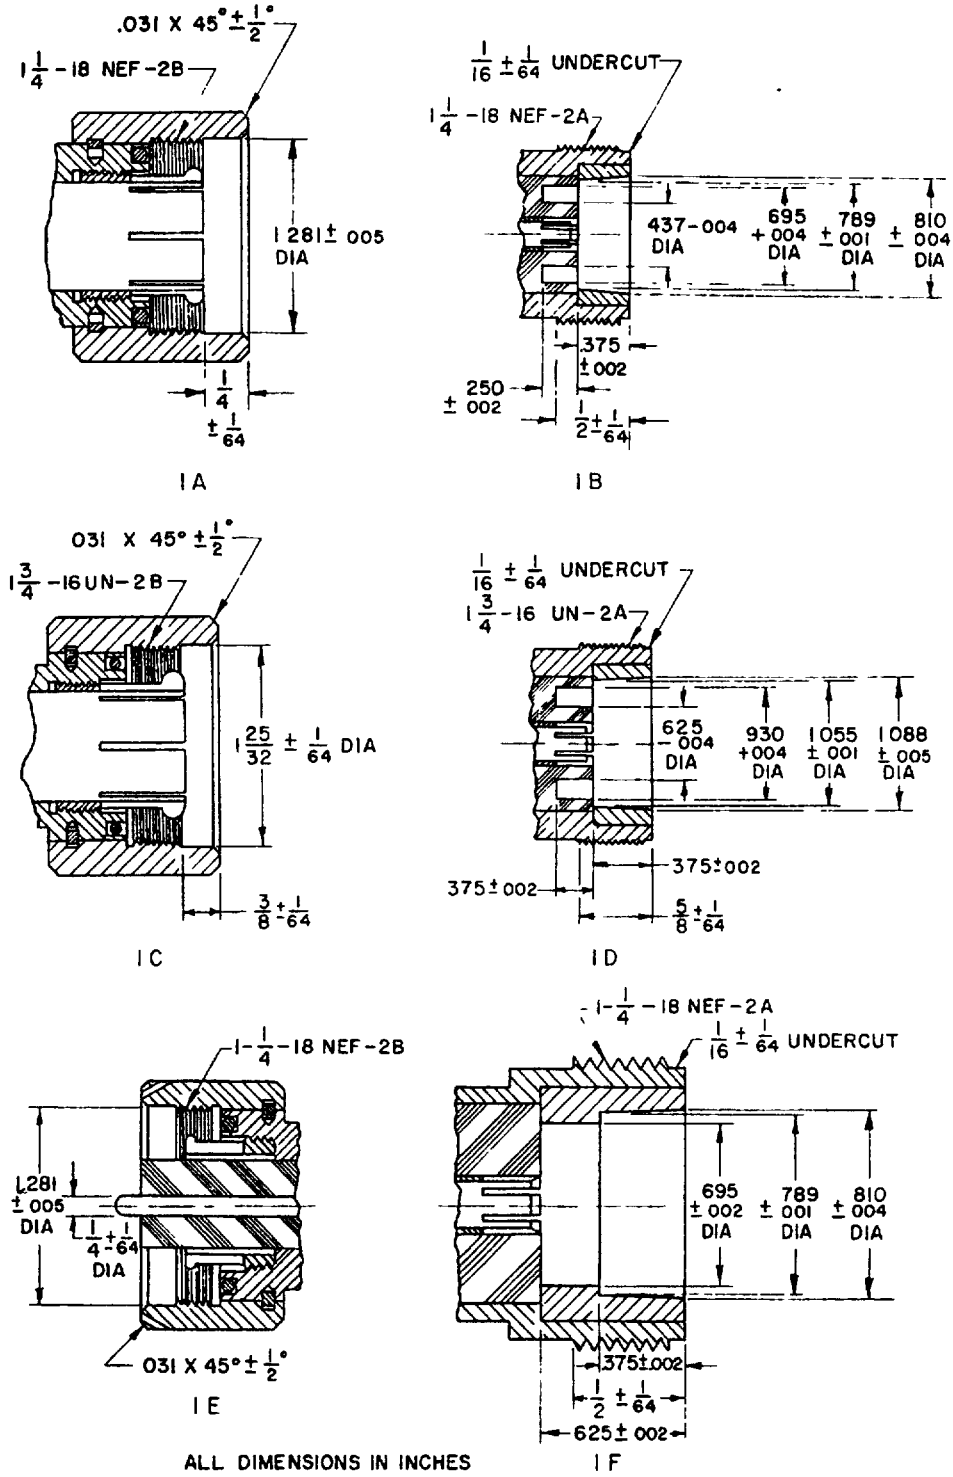


Figure 1 Dimensional requirements for group B inspection

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

If the number of failures exceeds the applicable acceptance number specified in table IV, the sample shall be considered to have failed.

4 5 1 5 1.2 1 Disposition of sample units Sample units which have been subjected to group C inspection, subgroup 2, shall not be delivered on the contract or order.

4.5.1.5.2 Noncompliance If a sample fails to pass group C inspection, the supplier shall take corrective action on the materials or process, or both, as warranted, and on all units of product which can be corrected and which were manufactured under essentially the same conditions, with essentially the same materials, processes, etc, and which are considered subject to the same failure. Acceptance of the product shall be discontinued until corrective action, acceptable to the Government, has been taken. After the corrective action has been taken, group C inspection shall be repeated on additional sample units (all inspection, or the inspection which the original sample failed, at the option of the Government). Groups A and B inspection may be reinstituted, however, final acceptance shall be withheld until the group C reinspection has shown that the corrective action was successful In the event of failure after reinspection, information concerning the failure and the corrective action taken shall be furnished to the contracting officer.

4 5.2 Inspection of preparation for delivery. Sample items and packs shall be selected and inspected in accordance with Specification MIL-P-116 to verify conformance with requirements in section 5 of this specification

4.6 Methods of examination and test.

4 6 1 Visual and mechanical examination. Connectors shall be examined to verify that the materials, design, construction, physical dimensions, marking, and workmanship are in accordance with the applicable requirements (See 3.1 to 3 3 3, incl, 3.6, and 3 7)

4.6 1.1 Gage tests for contacts

4.6.1.1.1 Center contacts (female).

4.6.1.1.1.1 Contacts mating with a 0.188-inch-diameter pin shall be formed in at their longitudinal centers and all contact members shall make contact with a rod 0 183 inch in diameter, but shall not make contact with a rod 0.178 inch in diameter. (See 3.3 4.1)

4 6 1.1.1.2 Contacts mating with a 0.250-inch-diameter pin shall be formed in at their longitudinal centers and all contact members shall make contact with a rod 0.254 inch in diameter, but shall not make contact with a rod 0.240 inch in diameter. (See 3.3.4.1.)

4 6 1.1.2 Outer contacts

4.6 1 1.2.1 All fingers of the outer contacts whose nominal outside diameter is 0.789 inch shall make contact within 1/32 inch of their tip ends with a gage ring having an inside diameter of 0.793 inch, but shall not make contact with a ring having an inside diameter of 0.803 inch. (See 3.3.4.2)

4.6.1.1.2.2 All fingers of the outer contacts whose nominal outside diameter is 1.055 inches shall make contact within 1/32 inch of their tip ends with a gage ring having an inside diameter of 1.063 inches, but shall not make contact with a ring having an inside diameter of 1.071 inches (See 3 3.4.2.)

4 6.2 Coupling nuts. A pull of 100 pounds shall be applied to the coupling nut. It shall be applied in the direction away from the connector body and along the longitudinal axis. (See 3.3.5.)

4.6.3 Dielectric withstanding voltage (when applicable) (see 3.4). Connectors shall be tested in accordance with method 301 of Standard MIL-STD-202. The following details shall apply

(a) Special preparations or conditions.

1. The maximum relative humidity shall be 50 percent When facilities are not available at this test condition, connectors shall be tested at room ambient relative humidity. In case of dispute, if the test has been made at room ambient relative humidity, retest shall be made at 50 percent maximum relative humidity
2. Precautions shall be taken to prevent airgap voltage breakdowns.
3. The voltage shall be metered on the high side of the transformer.

(b) Magnitude of test voltage - Unless otherwise specified (see 3.1), 10,000 volts root mean square.

(c) Nature of potential - Alternating current

(d) Points of application of test voltage - Between the center contact and body, with the connector properly mated with its associated connector or a suitable mating jig.

(e) Examination - After the test, connectors shall be examined for evidence of breakdown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

4.6 4 Salt spray (corrosion). Connectors shall be tested in accordance with method 101, test condition B, of Standard MIL-STD-202 At the conclusion of the test, the connectors shall be washed, shaken, and airblasted, and then permitted to dry for 24 hours at 40°C The connectors shall then be examined for evidence of destructive corrosion and pitting. (See 3.5.)

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging (see 6.2).

5.1 1 Level A. Unless otherwise specified (see 6.2), connectors shall be individually protected and unit-packaged in accordance with method IA of Specification MIL-P-116, without the use of contact preservatives Prior to packaging, the parts of the connector shall be completely assembled. All center contacts, where loose, shall be securely fastened to the body of the connector by wire or other approved method. Unless otherwise specified (see 6.2), five unit packages or a multiple thereof shall be further packaged in intermediate containers conforming to Specification PPP-B-566, PPP-B-665, or PPP-B-676 The gross weight of the intermediate container shall not exceed 10 pounds.

5.1.2 Level C. Connectors shall be afforded preservation and packaging in accordance with the supplier's normal commercial practice

5.2 Packing (see 6 2).

5 2.1 Level A. Connectors packaged as specified (see 6.2) shall be packed in overseas-type wirebound wood, wood-cleated fiberboard, wood-cleated plywood, nailed wood, fiber (class 2 or 3, as specified (see 6 2)), or wood-cleated paper-overlaid boxes conforming to Specifications PPP-B-585, PPP-B-591, PPP-B-601, PPP-B-621, PPP-B-636, and MIL- B-10377, respectively, at the option of the supplier. Shipping containers shall have case liners conforming to Specification MIL-L-10547, the case liners shall be closed and sealed in accordance with the appendix thereto Case liners for boxes conforming to Specification PPP-B-636 may be omitted provided the center and edge seams and manufacturers' joints are sealed with tape, at least 1-1/2 inches wide, conforming to Specification PPP-T-76. Box closures and strapping shall be as specified in the applicable box specification or appendix thereto Fiber boxes conforming to Specification PPP-B-636 may be banded with tape conforming to type IV of Specification PPP-T-97 and appendix thereto in lieu of steel straps The gross weight of wood boxes shall not exceed 200 pounds, fiberboard boxes shall not exceed the weight limitations of the applicable box specification.

5 2 2 Level B. Connectors packaged as specified (see 6.2) shall be packed in domestic-type wirebound wood, wood-cleated fiberboard, wood-cleated plywood, nailed wood, fiber (class 1 or 2, as specified (see 6.2)), or wood-cleated paper-overlaid boxes conforming to Specifications PPP-B-585, PPP-B-591, PPP-B-601, PPP-B-621, PPP-B-636, and MIL-B-10377, respectively, at the option of the supplier Box closures shall be as specified in the applicable box specification or appendix thereto. The gross weight of wood boxes shall not exceed 200 pounds, fiberboard boxes shall not exceed the weight limitations of the applicable box specification

5.2 3 Level C Connectors packaged as specified (see 6.2) shall be packed in containers of the type, size, and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination Shipping containers shall comply with Uniform Freight Classification Rules, or regulations of other carriers as applicable to the mode of transportation.

5 2.4 General Insofar as possible and practical, exterior containers shall be uniform in shape and size, shall be of minimum cube and tare consistent with the protection required, and shall contain identical quantities of identical items.

5 3 Marking In addition to any special marking required by the contract or order, unit packages, intermediate packages, and exterior shipping containers shall be marked in accordance with Standard MIL-STD-129 (See 6 2)

6 NOTES

6 1 Intended use Connectors covered by this specification are intended for use in radiofrequency applications up to 1,000 megacycles per second They are designed for use with large-size, radio-frequency, coaxial cables Their use is governed by temperature limitation of materials, and they are not recommended for use in applications where temperatures exceed 125°C

6 2 Ordering data Procurement documents should specify the following

(a) Title, number, and date of this specification
(b) Title, number, and date of the applicable MS military standard, the MS part number, and the complete type designation (See 1 2 1 and 3.1)
(c) That the supplier shall not substitute for a specified material or combination of fabricated parts (see 3 3) unless he obtains approval from the Government Evidence to substantiate his claim that

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

such a substitution is suitable shall be submitted with his request. Similar notification and substantiating evidence shall be submitted at any later time if substitution becomes necessary or desirable At the discretion of the Government, test samples may be required to prove the suitability of the proposed substitute.

(d) Levels of preservation and packaging and packing, and applicable marking. (See sect 5.)

(e) Method of preservation and packaging of Specification MIL-P-116, if other than method IA. (See 5 1.1.)

(f) Number of unit packages if other than that specified in 5 1.1.

(g) Class of fiber. (See 5.2 1 and 5 2 2)

6 3 Government verification inspection Verification inspection by the Government will be limited to the amount deemed necessary to determine compliance with the contract or order, and will be limited in severity to the definitive quality assurance provisions established in this specification and the contract or order. The amount of verification inspection by the Government will be adjusted to make maximum utilization of the supplier's quality-control system and the quality history of the product (See 4.1 2)

6.4 Cross index This specification covers the design of series LC connectors which were previously covered by single Service drawings. Table V is a cross index of the connectors and single Service drawings.

Table V. Cross index of connectors and single Service drawings.

Type No.	Bureau of Ships drawing No.
UG-154A/U	REB49152
UG-155B/U	REB49153
UG-156A/U	REB49154
UG-157B/U	REB49155
UG-208B/U	REB49156
UG-216B/U	REB49158
UG-219B/U	REB49159
UG-287B/U	REB49157
UG-352B/U	REB49160

6 5 Engineering information. Illustrations and additonal engineering information for these connectors are available in the Armed Services Index of R F. Transmission Lines and Fittings, copies of which are available upon request from the Armed Services Electro-Standards Agency (ASESA), Fort Monmouth, N. J.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians
Army - Signal Corps
Navy - Ships
Air Force - DAY

Preparing activity
Navy - Ships
(Project 5935-132)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL SHIP ENGINEERING CENTER
ATTN: CODE 6604.3B
WASHINGTON, D. C. 20360

FOLD

PLATE NO. 15419 (BACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:39Z
Check the source to verify that this is the current version before use.