
MILITARY SPECIFICATION SHEET


CONNECTOR, RECEPTACLE, ELECTRICAL, CLASS I

(COAXIAL, SERIES TWIN, TWTNC, JAM NUT MOUNTED)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-3655.

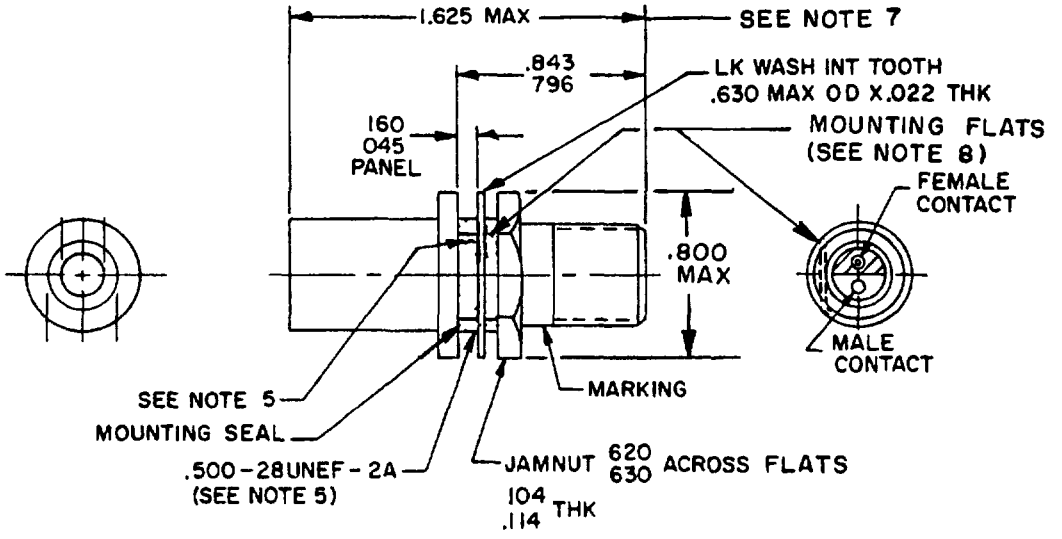

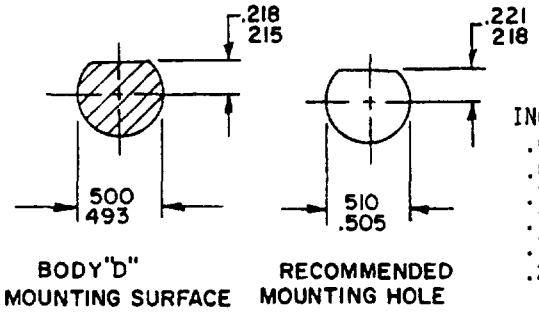

INCHES	MM	INCHES	MM	INCHES	MM
.022	.56	.218	5.54	.620	15.75
.045	1.14	.221	5.61	.630	16.00
.104	2.64	.493	12.52	.796	20.22
.114	2.90	.500	12.70	.800	20.32
.160	4.06	.505	12.83	.843	21.41
.215	5.46	.510	12.95	1.625	41.27


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Wrench flats are to accomodate standard wrench openings per H-28 app. 10.
4. All undimensioned pictorial configurations are for reference purpose only.
5. Full threads to within .063 (1.60 mm) of shoulder.
6. Unless otherwise specified, tolerance is ±.005 (.13 mm).
7. Dimension defines the maximum length of the connector when assembled to the appropriate cable
8. Contacts, insulator and mounting flat shall be oriented within ±3° of orientation shown.

Ⓐ denotes changes

FIGURE 1. Type TWTNC, electrical receptacle connector

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

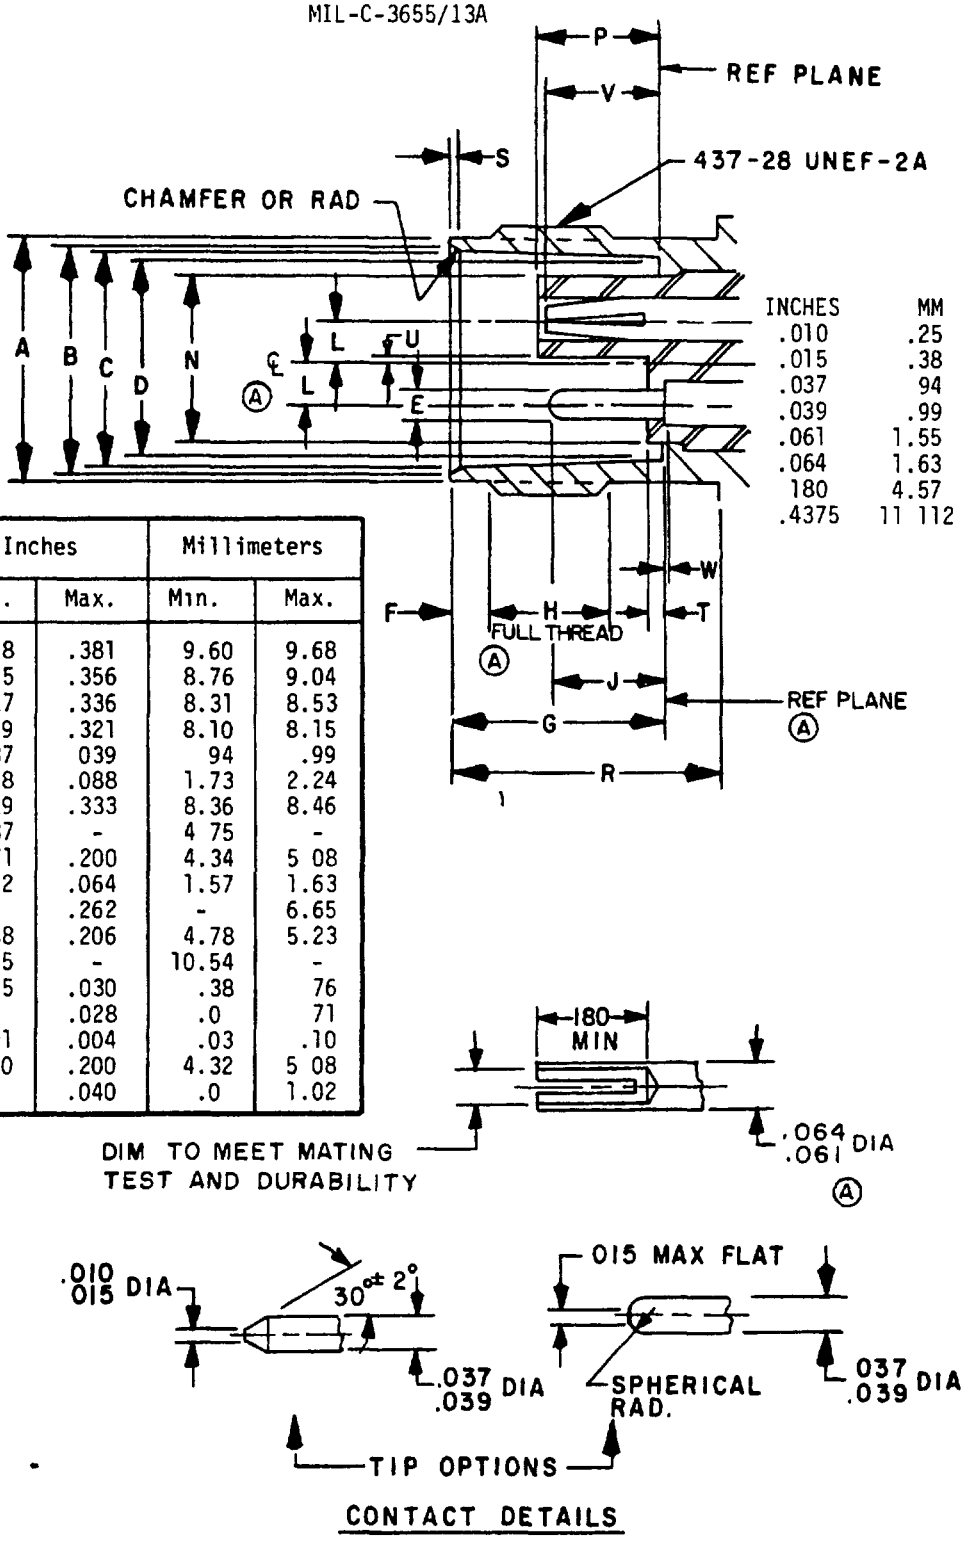

Dim.	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	.378	.381	9.60	9.68
B	.345	.356	8.76	9.04
C	.327	.336	8.31	8.53
D	.319	.321	8.10	8.15
E	.037	039	94	.99
F	.068	.088	1.73	2.24
G	.329	.333	8.36	8.46
H	.187	-	4 75	-
J	.171	.200	4.34	5 08
L	.062	.064	1.57	1.63
N	-	.262	-	6.65
P	.188	.206	4.78	5.23
R	.415	-	10.54	-
S	.015	.030	.38	76
T	0	.028	.0	71
U	.001	.004	.03	.10
V	.170	.200	4.32	5 08
W	0	.040	.0	1.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2 Type TWTNC, visual mating requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Ⓐ ENGINEERING DATA:

Nominal impedance 78 ohms.

Frequency range DC to 500 MHz, maximum.

Voltage rating: 500 Vrms, maximum.

Mating connector: M3655/14-0001.

Captive contact retention. 6 pounds, axial.

Intended use Type M3655/13-0001 electrical connector is designed for use with radiofrequency cable M17/45-RG108.

Ⓐ REQUIREMENTS:

Design and construction: See figures 1 and 2.

Force to engage/disengage.
Torque 2 inch-pounds, maximum.
Longitudinal force Not applicable.

Coupling proof torque 15 inch-pounds, minimum.

Mating characteristics (see figures 1 and 2 for dimensions):
Inner contact
Oversize test pin: 0.042 inch diameter, minimum (nonclosed entry contacts only).
Test pin finish: 16 microinches.
Insertion depth .093 inch, minimum.
Number of insertions One.

Insertion force test
Steel test pin diameter: .039 inch, maximum.
Test pin finish: 16 microinches
Insertion depth: 093 inch, minimum.

Withdrawal force test:
Steel test pin diameter. .037 inch, maximum.
Test pin finish: 16 microiches.
Insertion depth .093 inch, minimum
Withdrawal force 2 ounces, minimum.

Permeability. Applicable

Hermetic seal: Not applicable.

Leakage Not applicable.

Insulation resistance: 5 x 10^9 ohms, minimum

Contact insulator captivation. Applicable, torque shall be 1 inch-pound.

Salt spray (corrosion) Applicable

Connector durability: Applicable.

Contact resistance (milliohms, maximum).

	Initial	After environment
Inner conductor contacts:	3.0	4.2
Outer conductor contacts	.4	Not applicable
Braid to body	.2	Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage· 1,500 Vrms, minimum, at sea level.

Vibration, high frequency. Applicable.

Shock (specified pulse) Applicable.

Temperature cycling Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2 x 10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force 25 pounds, minimum.

Coupling nut retention· Applicable.

Marking· In accordance with MIL-C-3655.
Part number M3655/13-0001.

Qualification. Required.

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities·
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity
Army - CR

Agent·
DLA - ES

(Project 5935-3086-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/13A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ. USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.