
MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CLASS I

(COAXIAL, SERIES TWIN, TWTNC)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-3655.

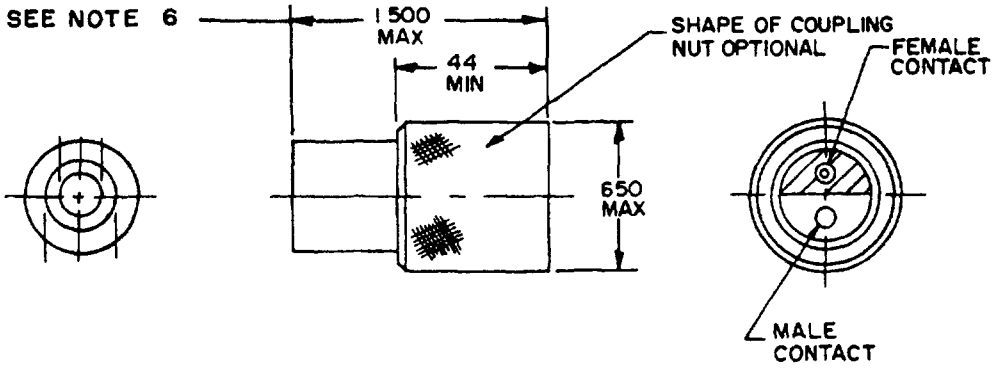

INCHES	MM
.44	11.2
650	16.51
1.500	38.10


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Wrench flats are to accomodate standard wrench openings per H-28 app. 10.
4. Unless otherwise specified tolerance is ±.005 (13 mm).
5 All undimensioned pictorial configurations are for reference purposes only.
6. Dimension defines the maximum length of the connector when assembled to the appropriate cable.

Ⓐ FIGURE 1. Type TWTNC, electrical plug connector

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

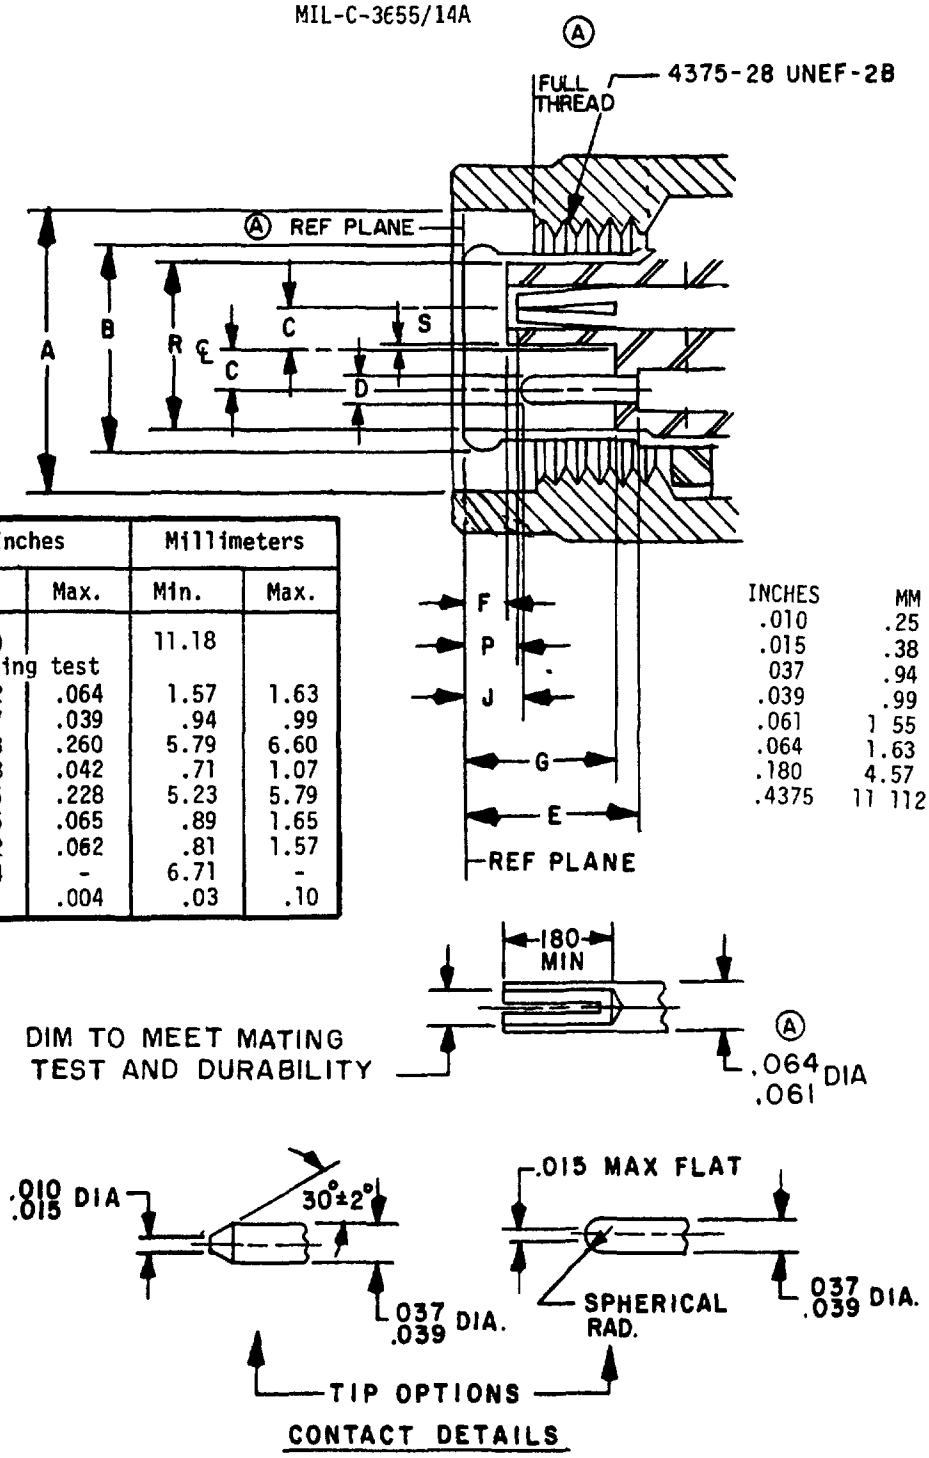

Dim.	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	.440		11.18	
B	Mating test			
C	.062	.064	1.57	1.63
D	.037	.039	.94	.99
E	.228	.260	5.79	6.60
F	.028	.042	.71	1.07
G	.206	.228	5.23	5.79
J	.035	.065	.89	1.65
P	.032	.062	.81	1.57
R	.264	-	6.71	-
S	.001	.004	.03	.10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Three holes .027 (.69 mm) minimum diameter equally spaced for safety wiring. Location on coupling nut optional.

FIGURE 2. Type TWTNC, visual mating requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Ⓐ ENGINEERING DATA:

Nominal impedance 79 ohms.

Frequency range· DC to 500 MHz, maximum

Voltage rating· 500 Vrms, maximum.

Mating connector M3655/13-0001.

Captive contact retention 6 pounds, axial.

Intended use Type M3655/14-0001 electrical connector is designed for use with radiofrequency cable M17/45-RG108.

Ⓐ REQUIREMENTS.

Design and construction See figures 1 and 2.

Force to engage/disengage·
Torque 2 inch-pounds, maximum.
Longitudinal force Not applicable.

Coupling proof torque. 15 inch-pounds, minimum.

Mating characteristics (see figures 1 and 2 for dimensions)

Inner contacts (sockets)
Oversize test pin 0.042 inch diameter, minimum (nonclosed entry contacts only).
Test pin finish 16 microinches.
Insertion depth 093 inch, minimum.
Number of insertions One.

Insertion force test
Steel test pin diameter· .039 inch, minimum.
Test pin finish 16 microinches.
Insertion depth .093 inch, minimum.
Insertion force 2 pounds, maximum.

Withdrawal force test
Steel test pin diameter .037 inch, maximum.
Test pin finish 16 microinches.
Insertion depth 093 inch, minimum.
Withdrawal force 2 ounces, minimum.

Outer contact
Test ring I.D.. .319 inch, maximum
Test ring finish 16 microinches.
Insertion force 5 pounds, maximum when inserted a minimum of .093 inch.
Contacts with slotted members. Shall contact a .324 inch minimum diameter ring within .031 of their tip ends.

Permeability. Applicable.

Hermetic seal. Not applicable

Leakage· Not applicable.

Insulation resistance 5 x 10^9 ohms, minimum

Contact insulator captivation ^pplicable, torque shall be 1 inch-pound.

Salt spray (corrosion) Applicable

Connector durability Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Contact resistance (milliohms, maximum):

	Initial	After environment
Inner conductor contacts:	3.0	4.2
Outer conductor contacts·	.4	Not applicable
Braid to body.	.2	Not applicable

Dielectric withstanding voltage. 1,500 Vrms, minimum, at sea level.

Vibration, high frequency: Applicable.

Shock (specified pulse): Applicable.

Temperature cycling: Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2×10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force. 25 pounds, minimum.

.Coupling nut retention: Applicable.

Marking: In accordance with MIL-C-3655.
Part number: M3655/14-0001.

Qualification: Required.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities·
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity·
Army - CR

Agent
DLA - ES

(Project 5935-3086-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/14A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN, DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.