
MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CLASS I

(COAXIAL, SERIES TWIN, TWBNC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-3655.

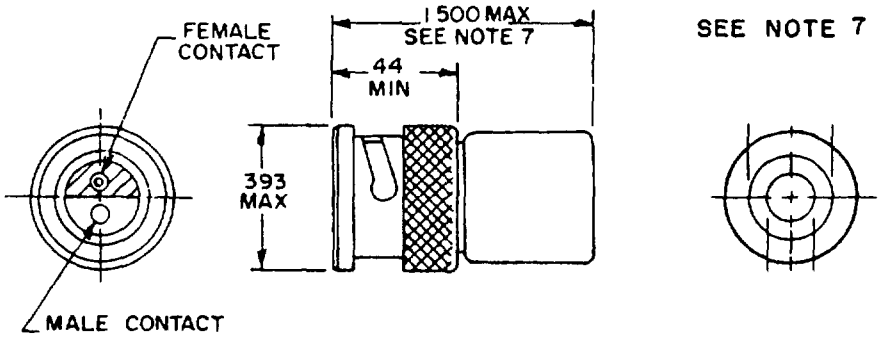

INCHES	MM
.393	9.98
.44	11.2
.593	15.06
1.500	38.10


. NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25.4 mm.
3. Unless otherwise specified tolerance is ±.005 (.13 mm)
4. Dimension .593 is the largest overall diameter of the connector.
5. Wrench flats are to accommodate standard wrench openings per H-28, app. 10.
6. All undimensioned pictorial representations are for reference purposes only.
7. Dimension defines the maximum length of the connector when assembled to the appropriate cable.

Ⓐ FIGURE 1. Type TWBNC, electrical plug connector.


Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

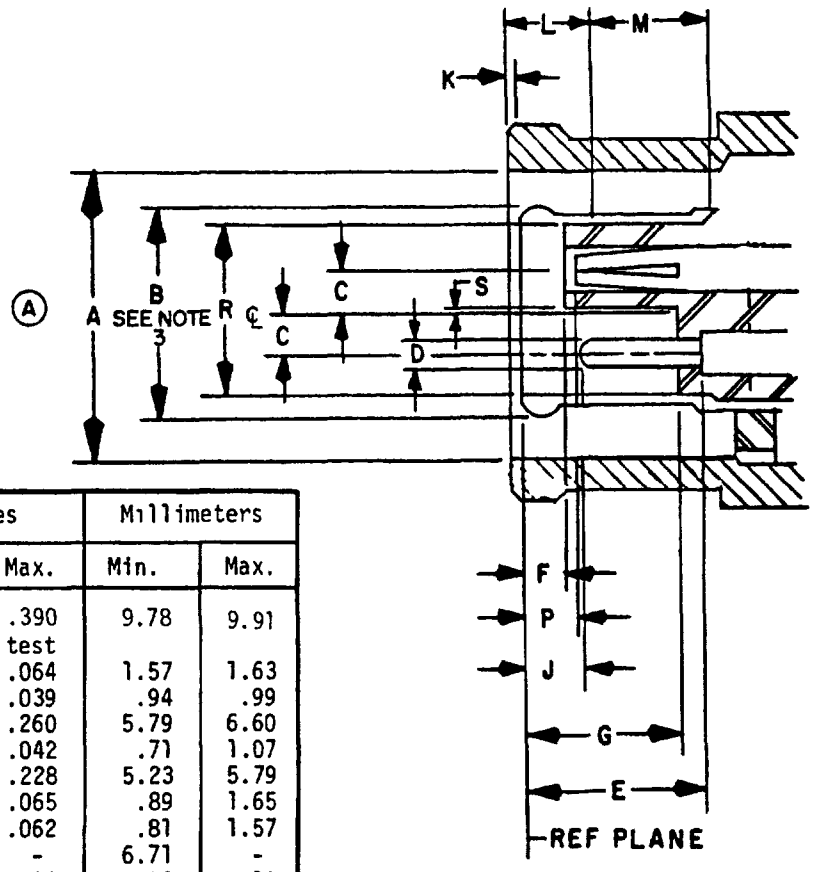

Dim.	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	.385	.390	9.78	9.91
B	Mating test			
C	.062	.064	1.57	1.63
D	.037	.039	.94	.99
E	.228	.260	5.79	6.60
F	.028	.042	.71	1.07
G	.206	.228	5.23	5.79
J	.035	.065	.89	1.65
P	.032	.062	.81	1.57
R	.264	-	6.71	-
S	.001	.004	.03	.10

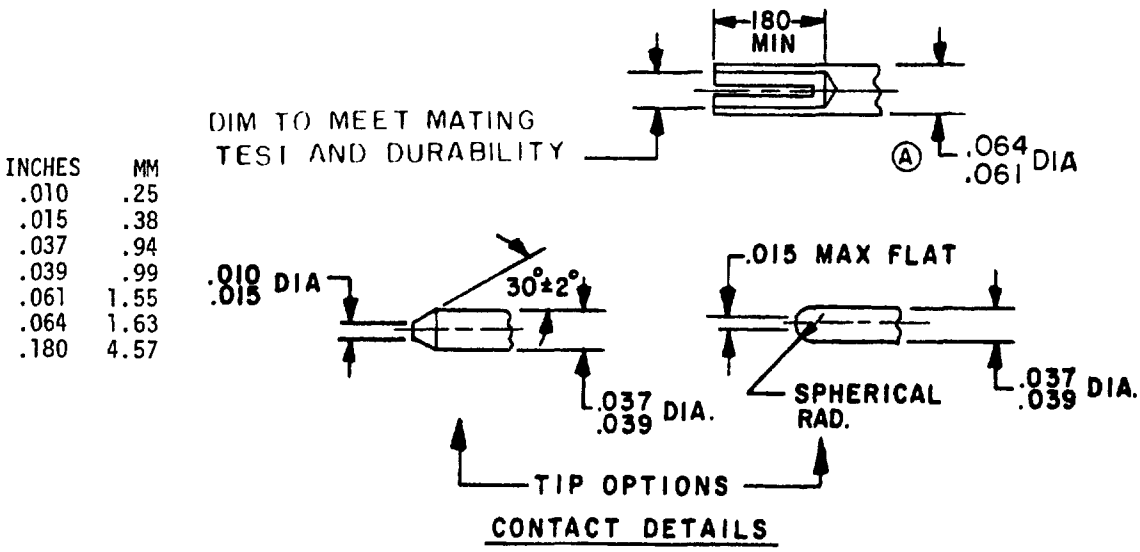


CONTACT DETAILS

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Flare to meet mating test.

FIGURE 2 Type TWBNC, visual mating requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

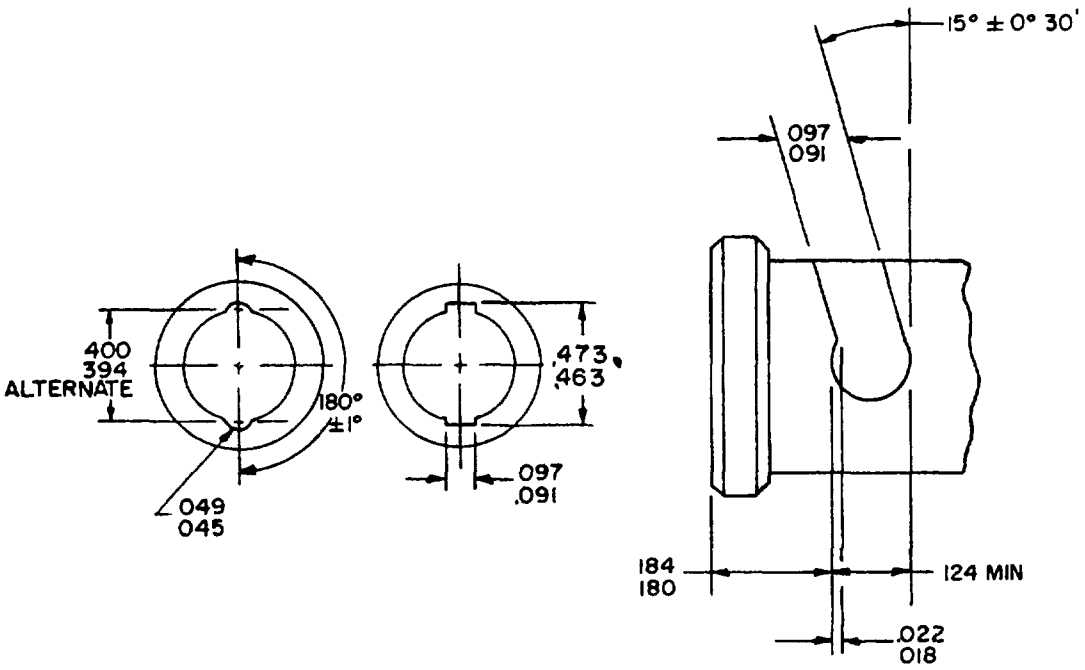

INCHES	MM	INCHES	MM
.045	1.14	.180	4.57
.049	1.24	.184	4.67
.091	2.31	.394	10.01
.097	2.46	.400	10.16
.124	3.15	.463	11.76
		473	12.01

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

Ⓐ FIGURE 3 Coupling configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Ⓐ ENGINEERING DATA·

Nominal impedance· 78 ohms

Voltage rating 500 Vrms, maximum

Mating connector M3655/16-0001.

Captive contact retention 6 pounds.

Intended use Type M3655/15-0001 electrical connector is designed for use with radiofrequency cable M17/45-RG108.

Ⓐ REQUIREMENTS

Design and construction· See figures 1, 2, and 3.

Force to engage/disengage·
Torque· 2.5 inch-pounds, maximum.
Longitudinal force. 3 pounds, maximum.

Coupling proof torque Not applicable

Mating characteristics (see figures 1 and 2 for dimensions)
Inner contact (sockets)
Oversize test pin 0.042 inch diameter, minimum (nonclosed entry contacts only).
Test pin finish 16 microinches.
Insertion depth .093 inch, minimum.
Number of insertions· One

Insertion force test.
Steel test pin diameter. .039 inch, minimum.
Test pin finish 16 microinches.
Insertion depth .093 inch, minimum.
Insertion force 2 pounds, maximum.

Withdrawal force test·
Steel test pin diameter· .037 inch, maximum.
Test pin finish· 16 microinches
Insertion depth 093 inch, minimum.
Withdrawal force 2 ounces, minimum

Outer contact
Test ring I D. 319 inch maximum
Test ring finish· 16 microinches.
Insertion force 5 pounds maximum when inserted a minimum of .093 inch.
Contacts with slotted members Shall contact a .324 inch minimum diameter ring within .031 inch of their tip ends.

Permeability Applicable.

Hermetic seal Not applicable

Leakage· Not applicable.

Insulation resistance 5 x 10^9 ohms, minimum.

Contact insulator captivation. Applicable, torque shall be 1 inch-pound.

Salt spray (corrosion) Applicable.

Connector durability Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Contact resistance (milliohms, maximum)

	Initial	After environment
Inner conductor contacts	3.0	4.2
Outer conductor contacts	.4	Not applicable
Braid to body.	.2	Not applicable

Dielectric withstanding voltage: 1,500 Vrms, minimum, at sea level.

Vibration, high frequency Applicable.

Shock (specified pulse) Applicable.

Temperature cycling. Applicable.

Humidity. Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2×10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force 25 pounds, minimum.

Coupling nut retention Applicable.

Marking In accordance with MIL-C-3655.
Part number M3655/15-0001.

Qualification· Required

Custodians
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3086-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS. This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/15A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.