INCH POUND

MIL-DTL-3655/15B
w/AMENDMENT 2
18 March 2008
SUPERSEDING
AMENDMENT 1
1 November 1999

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CLASS I
(COAXIAL, SERIES TWIN, TWBNC)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3655.

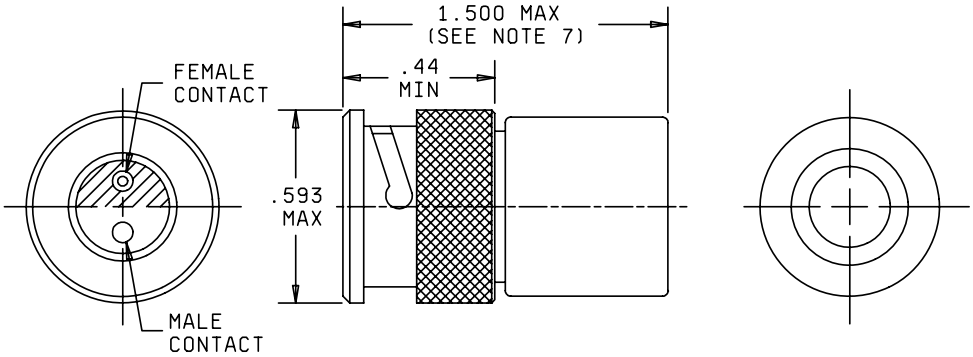

Inches	mm
.393	9.98
.44	11.2
.593	15.06
1.500	33.10

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ±. 005 (.13 mm).
4. Dimension .593 is the largest overall diameter of the connector.
5. Wrench flats are to accommodate standard wrench openings in accordance with FED-STD-H28, appendix 10.
6. All undimensioned pictorial configurations are for reference purpose only.
7. Dimensions define the maximum length of the connector when assembled to the appropriate cable.

FIGURE 1. Type TWBNC, electrical plug connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA

Frequency range: DC to 500 MHz, maximum.

Nominal impedance: 78 ohms.

Voltage rating: 500 V rms, maximum.

Mating connector: MIL-DTL-3655/16 (see table l).

TABLE I. Connector to cable accommodation.

Connector Part or Identifying Number (PIN)	Cable accommodation 1/
M3655/15-0001	M17/45-RG108 and M17/186-00001
M3655/15-0002	M17/182-00001
M3655/15-0003	M17/182-00002

1/ The latest version of each cable shall apply.

Captive contact retention: 6 pounds.

Intended use: Type MIL-DTL-3655/15 electrical connectors are intended for use with various types of twin axial radio frequency cables.

REQUIREMENTS:

Dimensions and construction: See figure 1 and MIL-STD-348.

Force to engage/disengage:
Torque: 2.5 inch-pounds, maximum.
Longitudinal force: 3 pounds, maximum.

Coupling proof torque: Not applicable.

Mating characteristics (see figure 1 and MIL-STD-348 for dimensions):
Inner contact (sockets):
Oversize test pin: 0.042 inch diameter, minimum (nonclosed entry contacts only).
Test pin finish: 16 microinches.
Insertion depth: .093 inch, minimum.
Number of insertions: One.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Insertion force test:
Steel test pin diameter: .039 inch, minimum.
Test pin finish: 16 microinches.
Insertion depth: .093 inch, minimum.
Insertion force: 2 pounds, maximum.

Withdrawal force test:
Steel test pin diameter: .037 inch, maximum.
Test pin finish: 16 microinches.
Insertion depth: .093 inch, minimum.
Withdrawal force: 2 ounces, minimum.

Outer contact:
Test ring inner diameter.: .319 inch, maximum.
Test ring finish: 16 microinches.
Insertion force: 5 pounds maximum when inserted a minimum of .093 inch.
Contacts with slotted members: Shall contact a .324 inch minimum diameter ring within .031 of their tip ends.

Permeability: Applicable.

Hermetic seal: Not applicable.

Leakage: Not applicable.

Insulation resistance: 5×10^9 ohms, minimum.

Contact insulator captivation: Applicable; torque shall be 1 inch-pound.

Salt spray (corrosion): Applicable.

Connector durability: Applicable.

Contact resistance (milliohms, maximum):

	Initial	After environment
Inner conductor contacts:	3.0	4.2
Outer conductor contacts:	.4	Not applicable
Braid to body:	.2	Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage: 1,500 V rms, minimum, at sea level.

Vibration, high frequency: Applicable.

Shock (specified pulse): Applicable.

Temperature cycling: Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2×10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force: 25 pounds, minimum.

Coupling nut retention: Applicable.

Part or Identifying Number (PIN): M3655/15 (See table I for dash numbers).

First article shall apply as follows: First article test inspection shall be performed in accordance with the requirements outlined in the latest revision of MIL-DTL-3655.

Amendment notations: The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-3655, this document references the following:

MIL-STD-348
FED-STD-H28
MIL-DTL-3655/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force – 11
DLA – CC

Review activities:
Army – AT, AV, MI
Navy – AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5935-2007-026)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:44Z
Check the source to verify that this is the current version before use.