MIL-C-3655/8B
11 April 1980
SUPERSEDING
MIL-C-3655/8A
17 June 1977

MILITARY SPECIFICATION SHEET


CONNECTOR ADAPTER, CLASS II

(COAXIAL, SERIES TWIN), TYPE UG-1059/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the adapter described herein shall consist of this document and the latest issue of Specification MIL-C-3655.

INACTIVE FOR NEW DESIGN

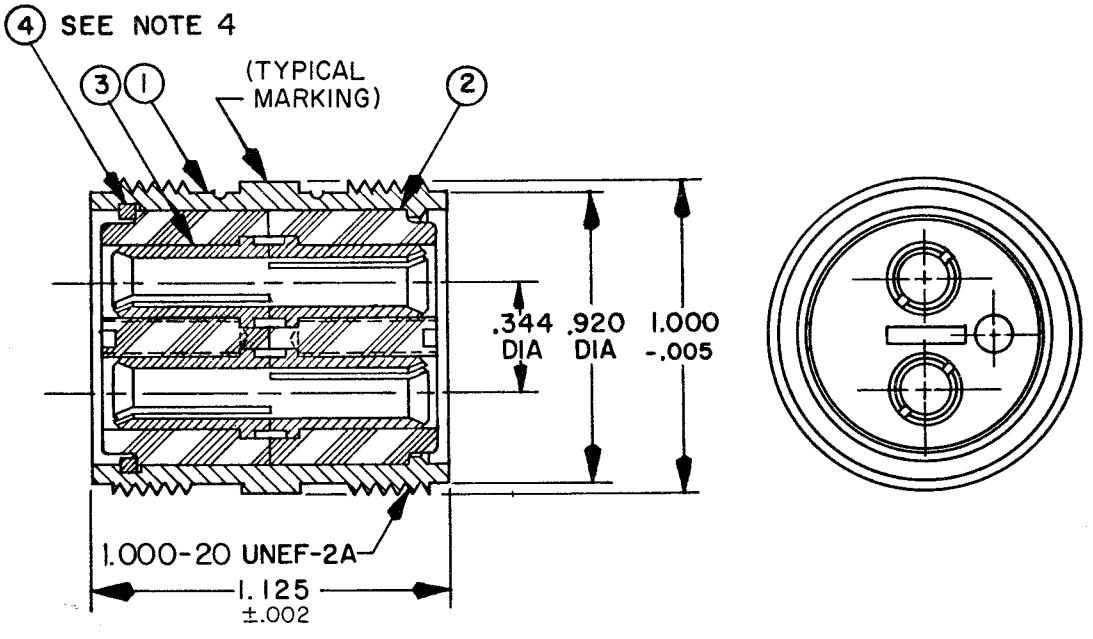

ASSEMBLY

FIGURE 1. Type UG-1059/U connector adapter.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:42Z
Check the source to verify that this is the current version before use.


Item	Description	Material	Quantity
1	Body	Brass	1
2	Insulator	Plastic	2
3	Center contact	Copper beryllium	2
4	Spring	Phosphor bronze	1

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.065	1.65	.224	5.69	.432	10.97	.812	20.62
.002	.05	.069	1.75	.231	5.87	.469	11.91	.859	21.82
.004	.10	.075	1.90	.250	6.35	.500	12.70	.891	22.63
.005	.13	.096	2.44	.281	7.14	.531	13.49	.910	23.11
.010	.25	.111	2.82	.288	7.32	.719	18.26	.920	23.37
.020	.51	.160	4.06	.312	7.92	.740	18.80	1.000	25.40
.031	.79	.188	4.78	.344	8.74	.760	19.30	1.125	28.58
.046	1.17	.203	5.16	.370	9.40	.798	20.27		
.062	1.57	.218	5.54	.406	10.31	.806	20.47		


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Item 4 to be assembled with small amount of Dow-Corning compound No. 4, or equal.
5. Polarizing key position on one end must be located 180° from polarizing key on opposite end.

FIGURE 1. Type UG-1059/U connector adapter - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

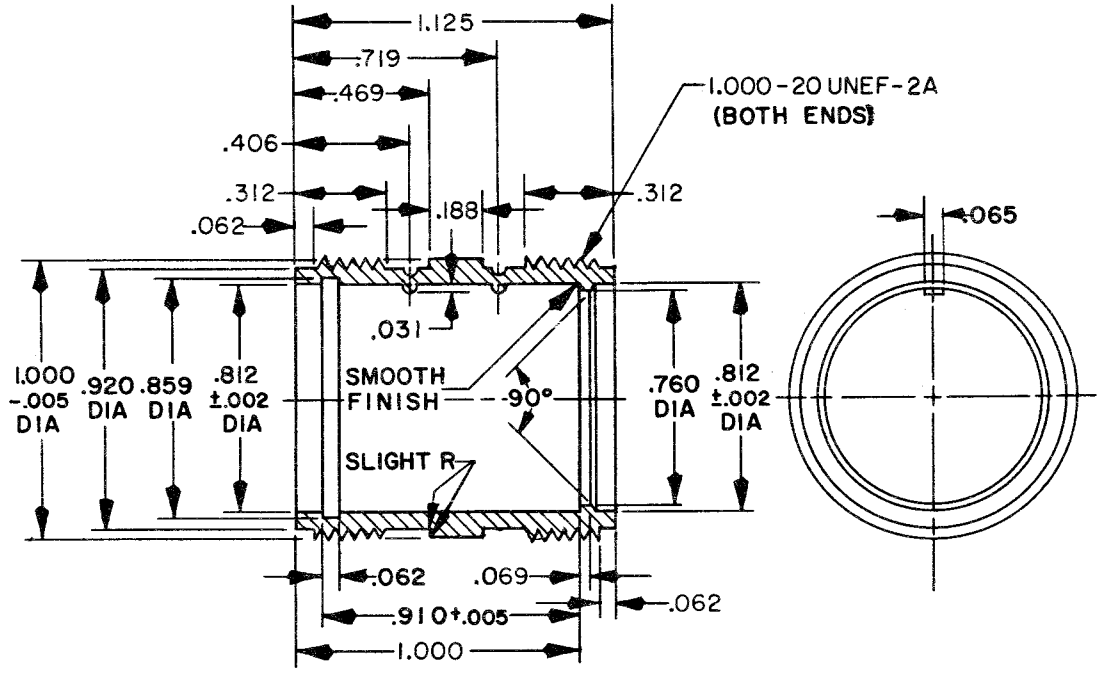


① BODY

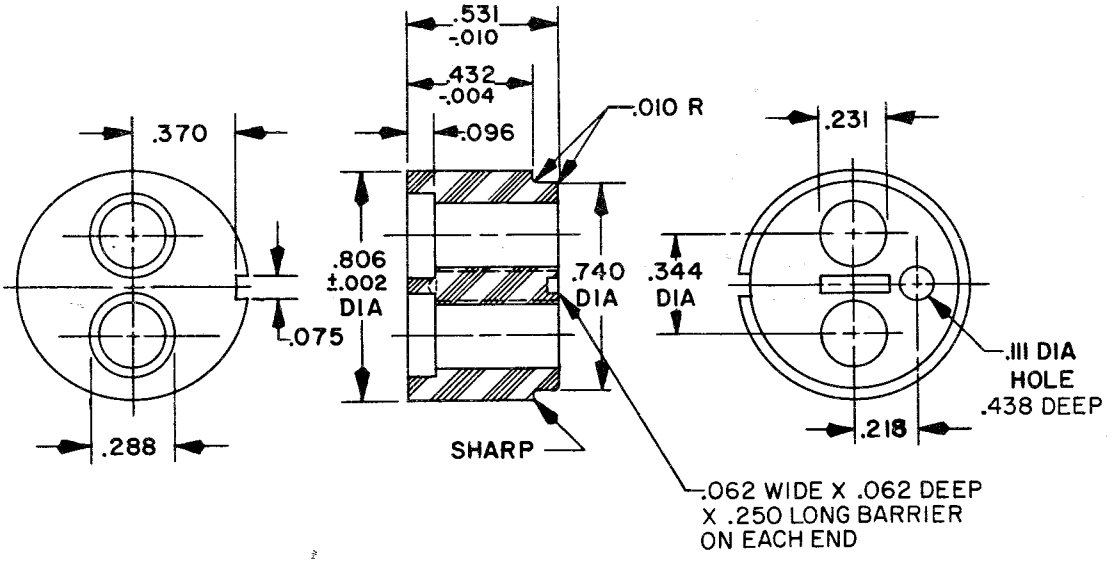


② INSULATOR

FIGURE 1. Type UG-1059/U connector adapter - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

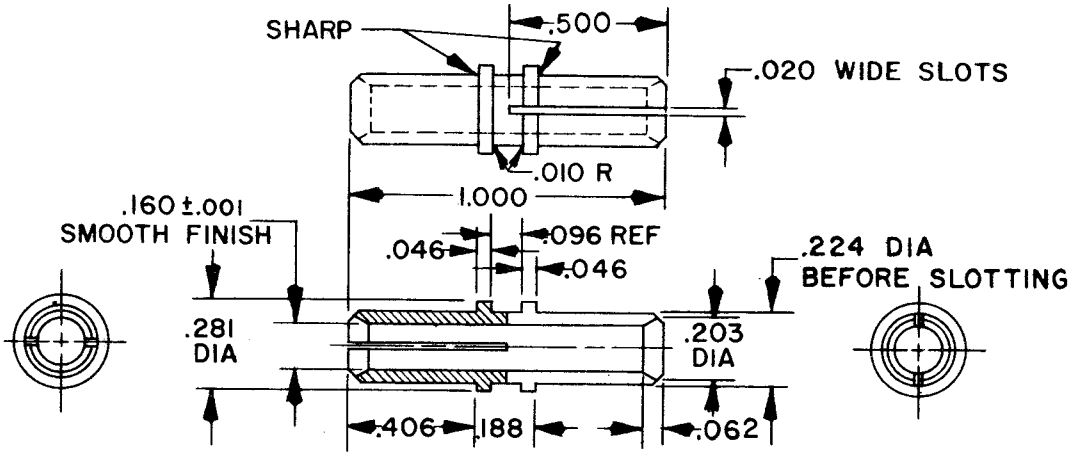


③ CENTER CONTACT

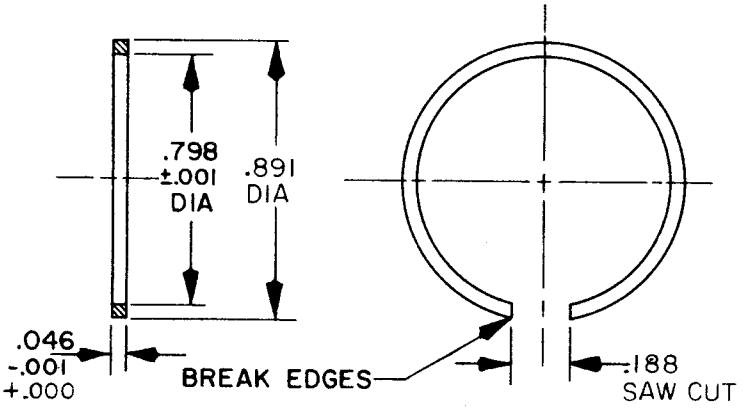

④ SPRING

FIGURE 1. Type UG-1059/U connector adapter - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

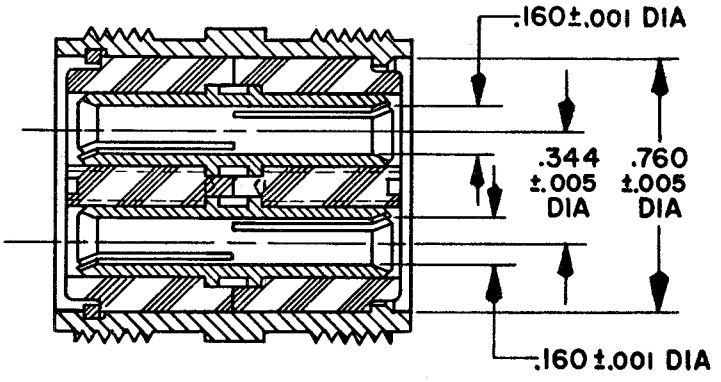

INCHES	MM
.001	.03
.005	.13
.160	4.06
.344	8.74
.760	19.30

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Visual mating requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

(B) ENGINEERING DATA:

Nominal impedance: 95 ohms.

Frequency range: DC to 500 MHz, maximum.

Voltage rating: 500 volts peak at sea level.

Mating connector: M3655/9-1060.

(B) REQUIREMENTS:

Design and construction: See figures 1 and 2.
Metal parts: All metal parts shall have silver plating of not less than 0.0002 inch thickness and of sufficient smoothness and density to withstand the salt spray (corrosion) test. Silver plating shall be in accordance with QQ-S-365.

Force to engage/disengage:
Torque: Not applicable.
Longitudinal force: Not applicable.

Coupling proof torque: Not applicable.

Mating characteristics (see figures 1 and 2 for dimensions):
Center contact:
Oversize test pin: 0.159 inch diameter, minimum.
Test pin finish: 16 microinches.
Insertion depth: .250 inch, minimum.
Number of insertions: One.

Insertion force test:
Steel test pin diameter: .157 inch, minimum.
Test pin finish: 16 microinches.
Insertion depth: .125 inch, minimum.
Insertion force: 4 pounds, maximum.

Withdrawal force test:
Steel test pin diameter: .155 inch, maximum.
Test pin finish: 16 microinches.
Insertion depth: .125 inch, minimum.
Withdrawal force: 9 ounces, minimum.

Permeability: Applicable.

Hermetic seal: Not applicable.

Leakage: Not applicable.

Insulation resistance: 5×10^9 ohms, minimum.

Contact insulator captivation: Not applicable.

Salt spray (corrosion): Applicable.

Connector durability: Applicable.

Contact resistance (milliohms, maximum):

	Initial	After environment
Inner conductor contacts:	2.67	3.50
Outer conductor contacts:	.38	Not applicable
Braid to body:	.20	Not applicable

Dielectric withstanding voltage: 1,500 Vrms, minimum, at sea level.

Vibration, high frequency: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): Not applicable.

Temperature cycling: Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2 x 10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force: Not applicable.

Coupling nut retention: Not applicable.

Marking: In accordance with MIL-C-3655.
Part number: M3655/8-1059.

Qualification: Not required.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3086-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/8B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:42Z
Check the source to verify that this is the current version before use.