MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, ELECTRICAL, CLASS I

(COAXIAL, SERIES TWIN), TYPE UG-1060A/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-3655.

INACTIVE FOR NEW DESIGN

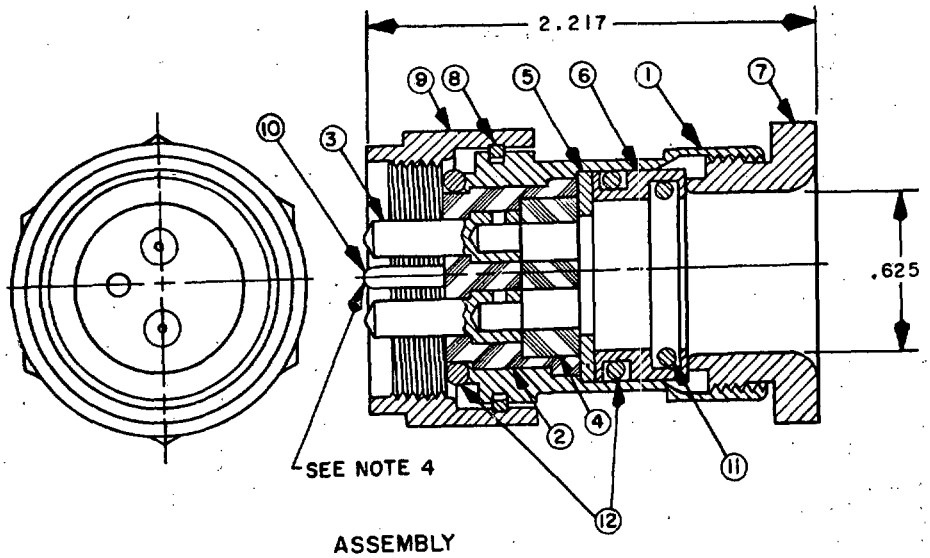


FIGURE 1. Type UG-1060A/U electrical plug connector.

(D) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.


Item	Description	Material	Quantity
1	Body	Brass	1
2	Insulator	Polytetrafluoroethylene	1
3	Center contact	Brass	2
4	Insulator	Polytetrafluoroethylene	1
5	Washer	Brass	1
6	O-ring adapter	Brass	1
7	Cable clamp	Brass	1
8	Retaining ring	Phosphor bronze	1
9	Coupling nut	Brass	1
10	Locating pin	Brass	1
11	O-ring	(See AN6227-12)	1
12	O-ring	(See AN6227-13)	2

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.111	2.82	.250	6.35	.680	17.27	.933	23.70
.002	.05	.118	3.00	.252	6.40	.685	17.40	.937	23.80
.003	.08	.120	3.05	.281	7.14	.688	17.48	.995	25.27
.004	.10	.125	3.18	.312	7.92	.710	18.03	1.000	25.40
.005	.13	.135	3.43	.344	8.74	.736	18.69	1.015	25.78
.015	.38	.141	3.58	.375	9.52	.750	19.05	1.031	26.19
.016	.41	.156	3.96	.406	10.31	.775	19.68	1.090	27.69
.031	.79	.159	4.04	.465	11.81	.781	19.84	1.105	28.07
.045	1.14	.171	4.34	.468	11.89	.802	20.37	1.125	28.58
.058	1.47	.172	4.37	.499	12.67	.807	20.50	1.146	29.11
.062	1.57	.188	4.78	.500	12.70	.812	20.62	1.156	29.36
.065	1.65	.215	5.46	.562	14.27	.833	21.16	1.172	29.77
.090	2.29	.216	5.49	.592	15.04	.840	21.34	1.281	32.54
.094	2.39	.218	5.54	.625	15.88	.895	22.73	1.312	33.32
.105	2.67	.219	5.56	.641	16.28	.896	22.76	2.217	56.31
.109	2.77	.234	5.94	.646	16.41	.906	23.01		


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Press fit locating pin, item 10, into insulator, item 2.

FIGURE 1. Type UG-1060A/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

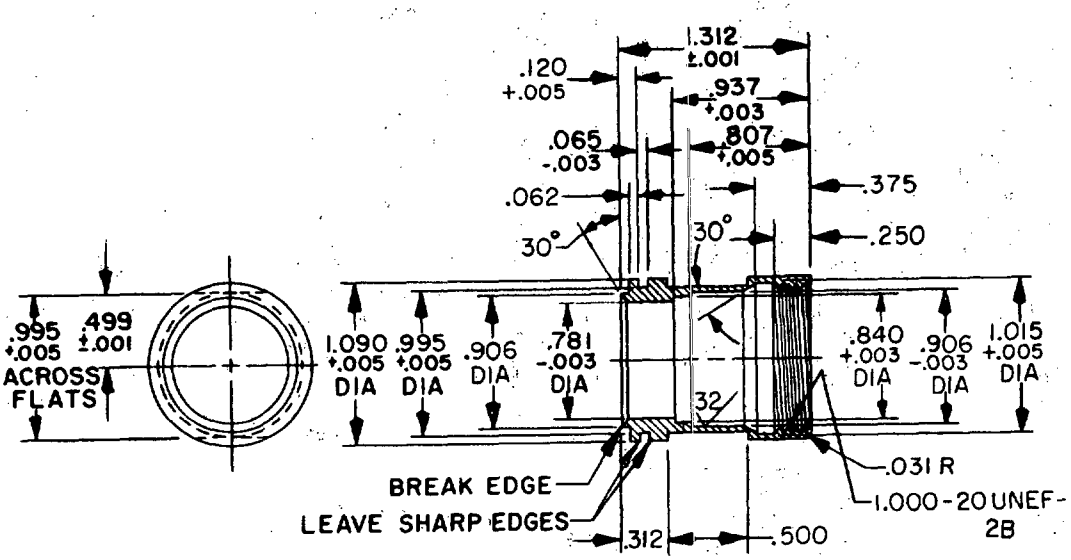


① BODY

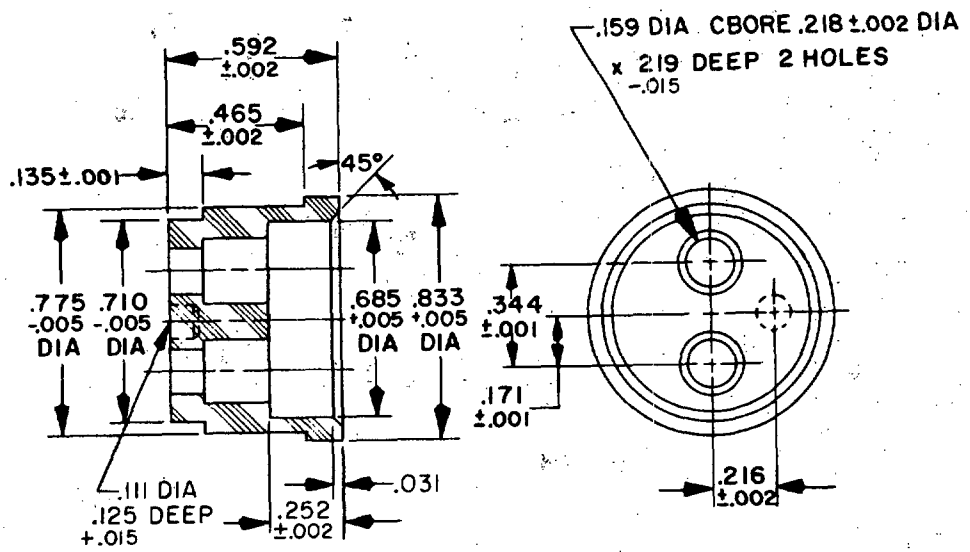


② INSULATOR

FIGURE 1. Type UG-1060A/U electrical plug connector - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

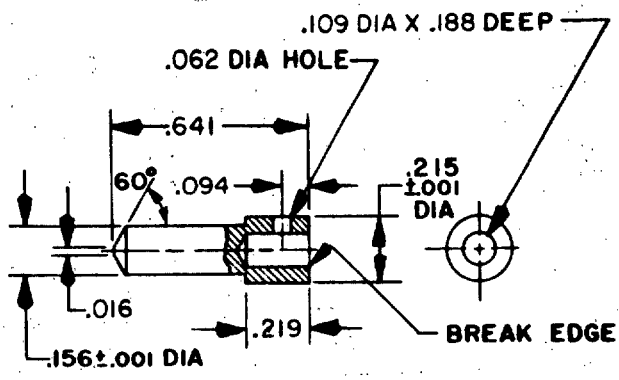

③ CENTER CONTACT

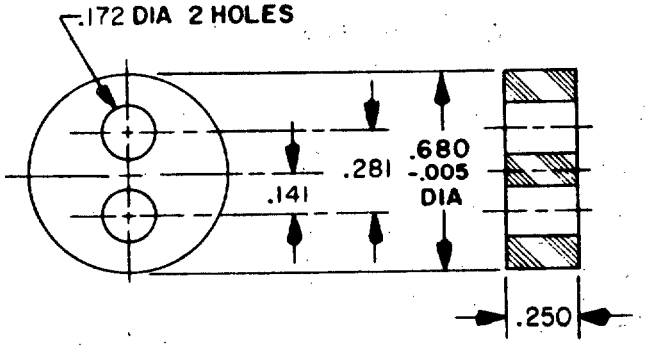


④ INSULATOR

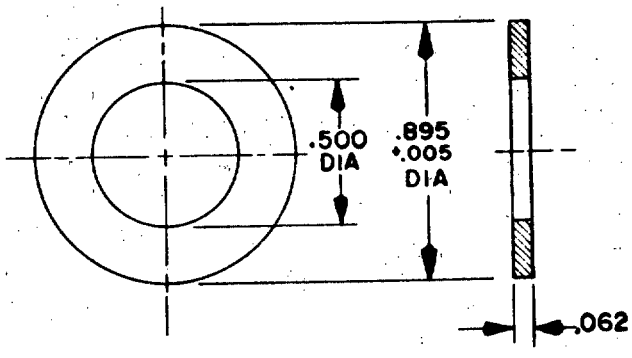


⑤ WASHER

FIGURE 1. Type UG-1060A/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

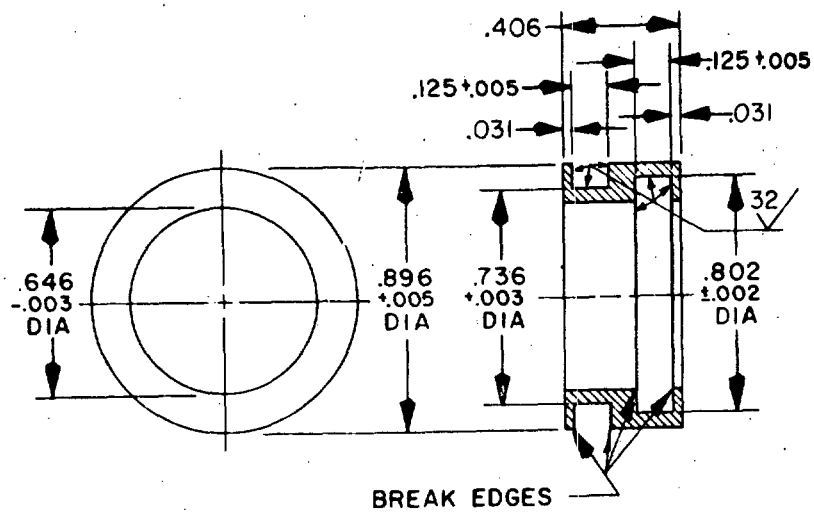


⑥ O-RING ADAPTER

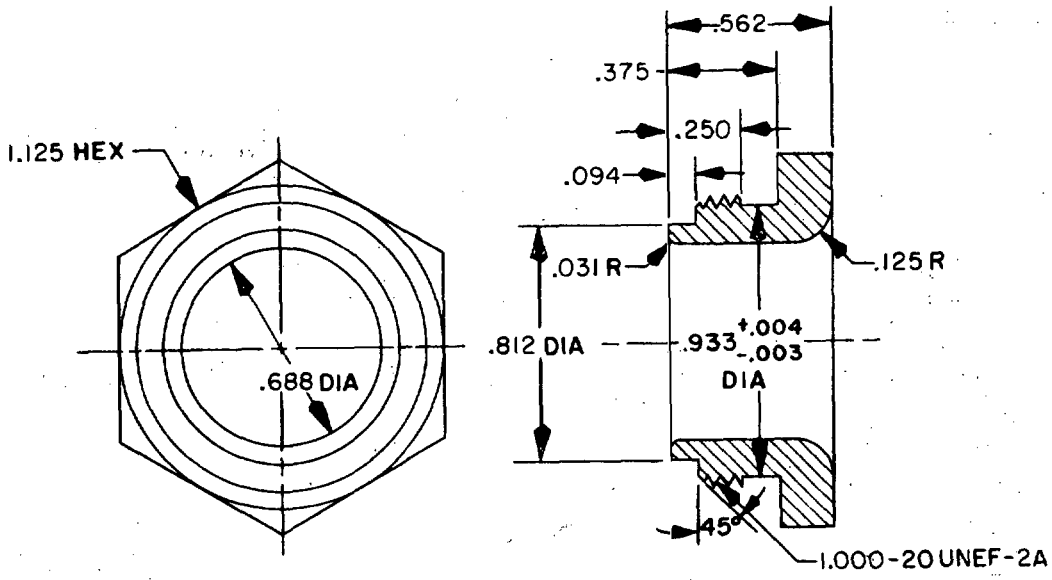


⑦ CABLE CLAMP

FIGURE 1. Type UG-1060A/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

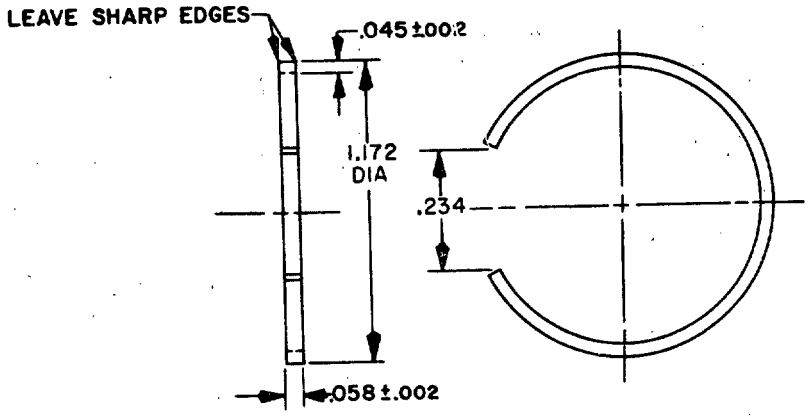


⑧ RETAINING RING

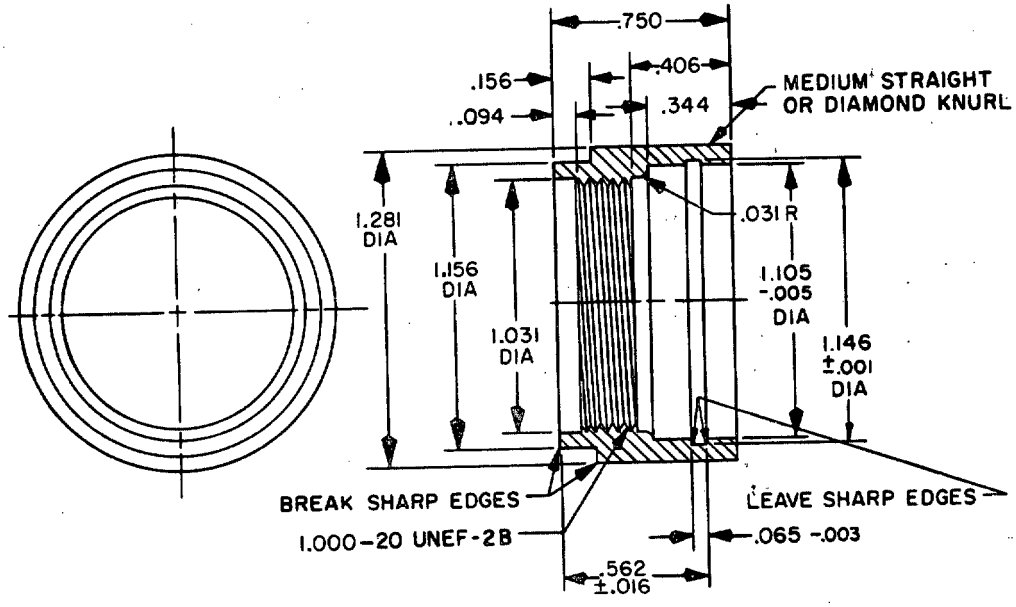

⑨ COUPLING NUT

FIGURE 1. Type UG-1060A/U electrical plug connector - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

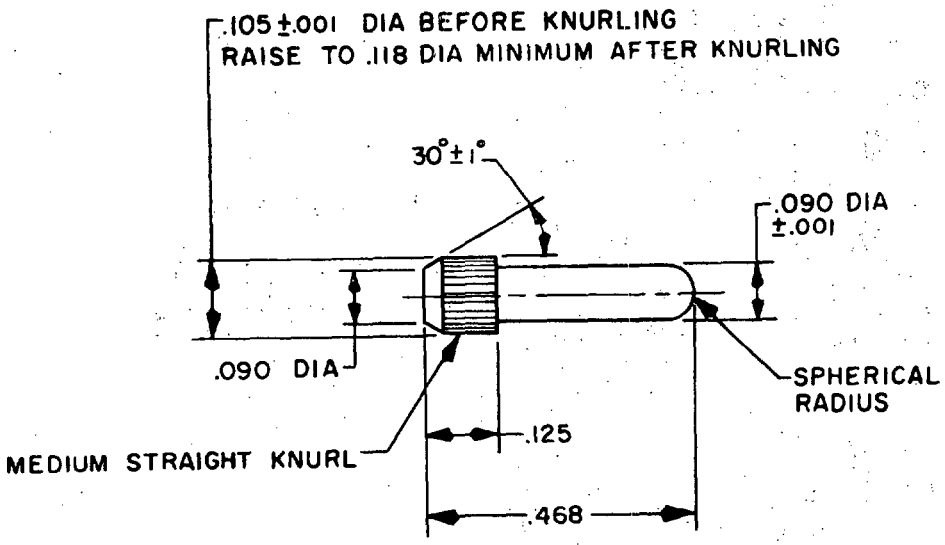

(10) LOCATING PIN

FIGURE 1. Type UG-1060A/U electrical plug connector - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

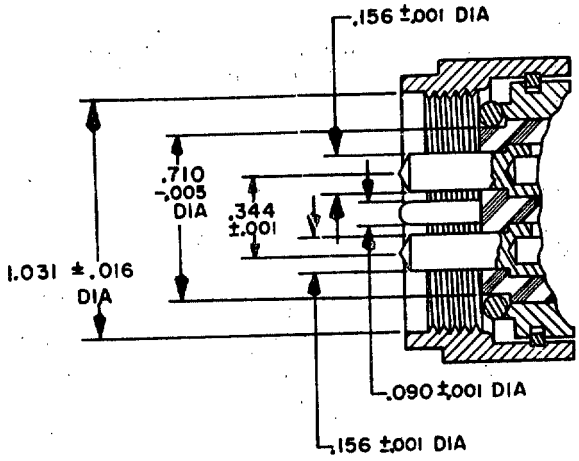

INCHES	MM	INCHES	MM
.001	.03	.156	3.96
.005	.13	.344	8.74
.016	.41	.710	18.03
.090	2.29	1.031	26.19

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Visual mating requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

(D) ENGINEERING DATA:

Nominal impedance: 95 ohms.

Frequency range: DC to 500 MHz, maximum.

Voltage rating: 500 volts peak at sea level.

Mating connector: M3655/8-1059.

Intended use: Type M3655/9-1060 electrical connector is designed for use with radio-frequency cable M17/56-RG130.

(D) REQUIREMENTS:

Design and construction: See figures 1 and 2.
Metal parts: All metal parts shall have silver plating of not less than 0.0002 inch thickness and of sufficient smoothness and density to withstand the salt spray (corrosion) test. Silver plating shall be in accordance with QQ-S-365.

Force to engage/disengage:
Torque: Not applicable.
Longitudinal force: Not applicable.

Coupling proof torque: 15 inch-pounds, minimum.

Mating characteristics: Not applicable.

Permeability: Applicable.

Hermetic seal: Not applicable.

Leakage: Not applicable.

Insulation resistance: 5×10^9 ohms, minimum.

Contact insulator captivation: Not applicable.

Salt spray (corrosion): Applicable.

Connector durability: Applicable.

Contact resistance (milliohms, maximum):

	Initial	After environment
Inner conductor contacts:	2.67	3.80
Outer conductor contacts:	.38	Not applicable
Braid to body:	.20	Not applicable

Dielectric withstanding voltage: 1,500 Vrms, minimum, at sea level.

Vibration, high frequency: Applicable.

Shock (specified pulse): Not applicable.

Temperature cycling: Applicable.

Humidity: Applicable, but no measurement shall be made at high humidity. Insulation resistance shall be at least 2×10^8 ohms within 5 minutes after removal from the humidity chamber.

Cable retention force: 75 pounds, minimum.

Coupling nut retention: Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

Marking: In accordance with MIL-C-3655.
Part number: M3655/9-1060.

Qualification: Not required.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3086-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-3655/9D

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:43Z
Check the source to verify that this is the current version before use.