

MILITARY SPECIFICATION SHEET

CONNECTOR, PLUG, TELEPHONE, ELECTRICAL

This specification sheet is approved for use by the Army Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of specification MIL-C-55074(EL).

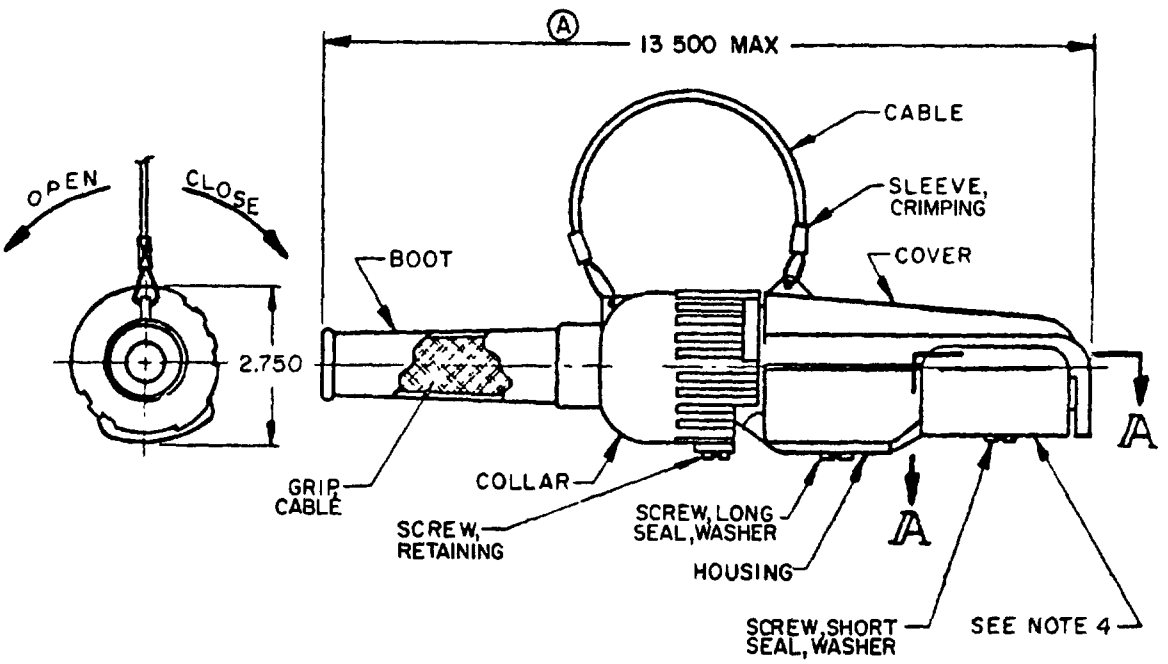

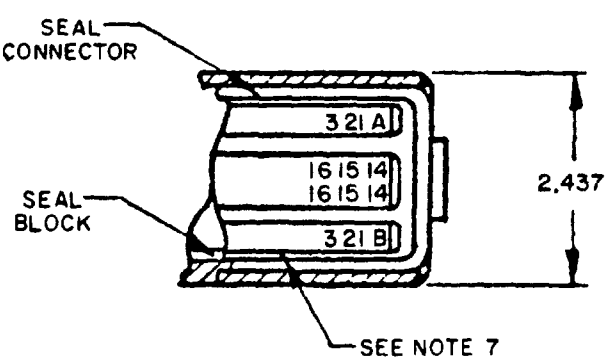

SECTION A-A

FIGURE 1. Connector plug

Ⓐ DENOTES CHANGES

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

	INCHES	MM
	.015	.38
	2 437	61.90
	2.750	69 85
Ⓐ	13.500	342 90

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm).
4. Marking to appear in area shown. Marking to consist of manufacturer's name or FSC code ident., CONN. PLUG ELEC., U-185B/G (M 55074/1), molded in characters approximately .187 (4.75 mm) high.
5. This connector will mate with itself MIL-C-55074/1 (U-185B/G), and connectors MIL-C-55074/2 (U-186C/G), and MIL-C-55074/3 (U-187A/G).
6. Turning cable end of connector to left unlocks cover for mating, turning to right locks cover. (See applicable end view, page 1.)
7. See MIL-C-55074/4 for contact assembly specifications.
8. M 55074/1 also represents U-185B/G where applicable in MIL-C-55074.
Ⓐ 9. Connector shall be manufactured in accordance with drawing number SC-DL-173805.
Ⓐ10. Connector must conform to the interchangeability requirements of gage number SC-GL-57996.

FIGURE 1. Connector plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configurations: See figure 1.

Material

Housing - Aluminum, commercial alloy 380 in accordance with QQ-A-591, finish in accordance with MIL-F-14072.

Collar - Aluminum, commercial alloy 380 in accordance with QQ-A-591, finish in accordance with MIL-F-14072

Cover - Aluminum, commercial alloy 380 in accordance with QQ-A-591, finish in accordance with MIL-F-14072.

(A) Boot - Silicone rubber, Class III, grade 50 in accordance with ZZ-R-765.

Seal, block - Low temperature neoprene, RS510 Γ_2 in accordance with MIL-STD-417.

(A) Seal, connector - Silicone rubber, Class IIb, grade 40, in accordance with ZZ-R-765.

Seal, washer - Stat-O-Seal, aluminum 7375-T6 (anodized) per QQ-A-250/12, rubber per MIL-R-6855, Class 1, 2, or 3.

Grip cable - 7 wires (010) stranded to .032 dia in accordance with QQ-W-423 (9 inch cut length).

Sleeve, crimping - Copper, zinc plated

Screw - Pan head, slotted, #6-32 NC x .500 lg in accordance with FF-S-92

Screw - Slotted, retaining, #10-32NF-2A, special, E300 in accordance with MIL-F-14072.

Screw - Pan head, slotted #6-32 NC x .875 lg in accordance with FF-S-92

Part number M55074/1-01

Custodian.
Army - EL

Preparing activity
Army - EL

Agent.
DLA - ES

(Project 5935-A054-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-55074/1A(EL) CONNECTOR, PLUG, TELEPHONE, ELECTRICAL

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Electronics Command
ATTN: DRSEL-RD-TS-S
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.