MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.


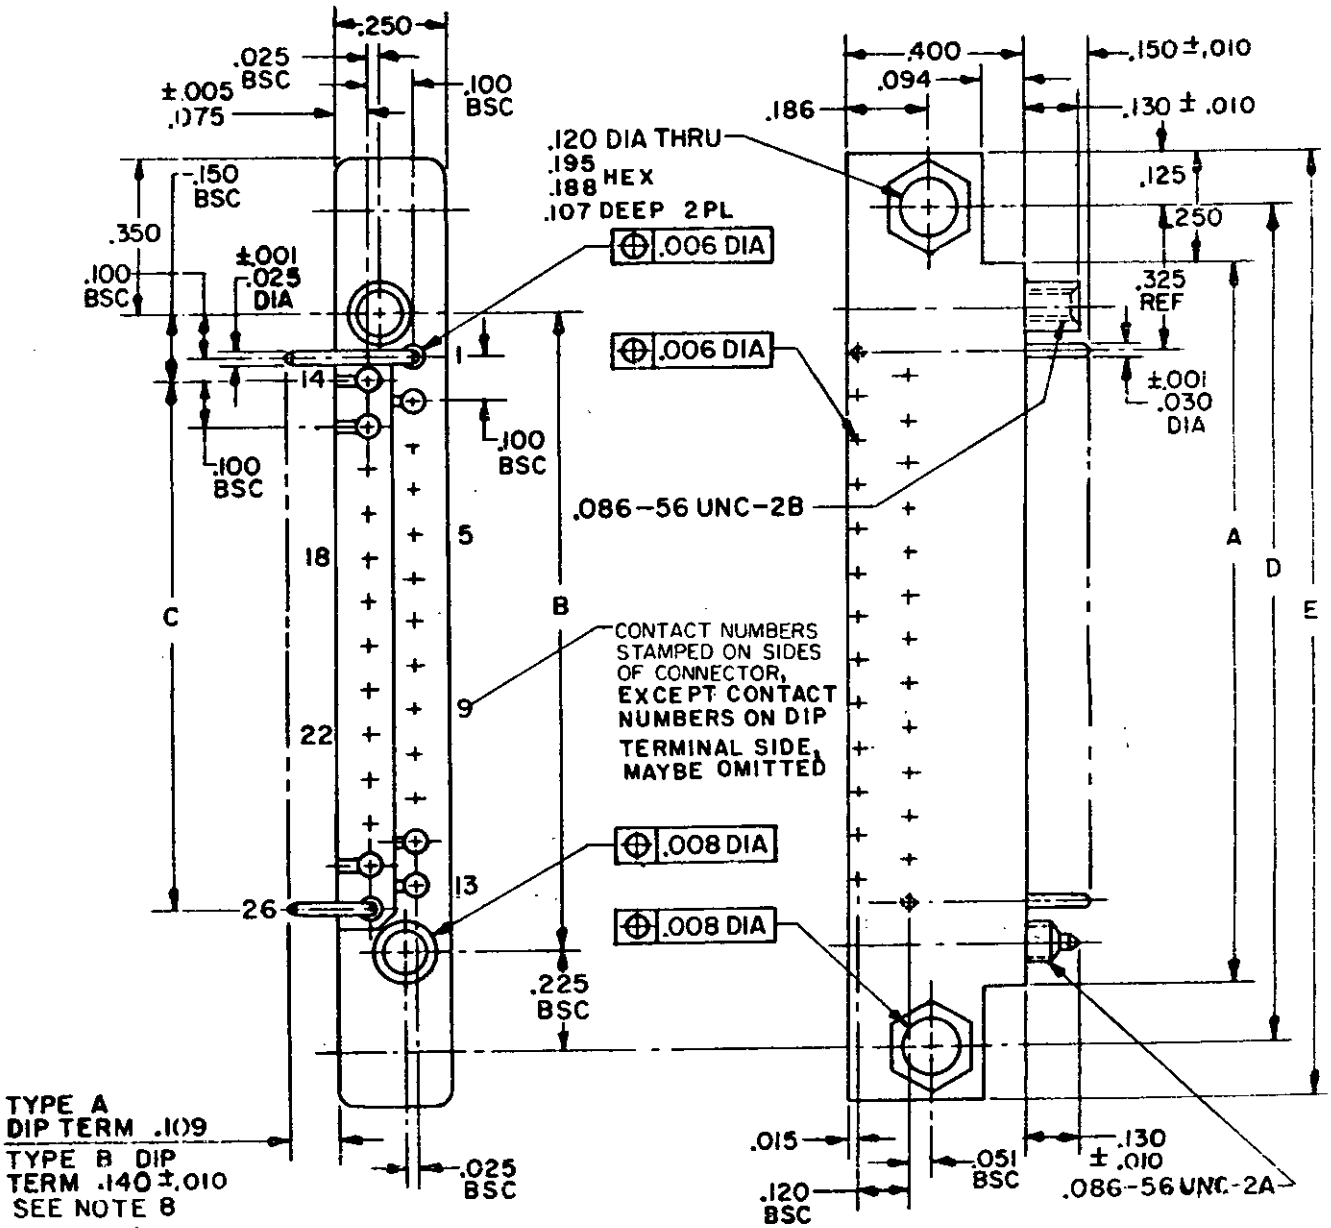


FIGURE 1. Connector, plug .100 (2.54 mm) spacing.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.

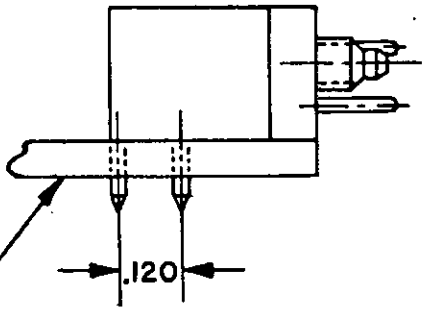

INCHES	MM
.001	.03
.005	.13
.006	.15
.008	.20
.010	.25
.015	.38
.017	.43
.025	.64
.030	.76
.051	1.30
.058	1.47
.075	1.91
.086	2.18
.094	2.39
.100	2.54
.107	2.72
.109	2.77
.120	3.05
.125	3.18
.130	3.30
.140	3.56
.150	3.81
.186	4.72
.190	4.83
.225	5.72
.250	6.35
.325	8.26
.350	8.89
.400	10.16

Number of contacts	Dimensions				
	A ±.010	BSC B	REF C	BSC D	E ±.010
10	.850 (21.59)	.650 (16.51)	.400 (10.16)	1.100 (27.94)	1.350 (34.29)
14	1.050 (26.67)	.850 (21.59)	.600 (15.24)	1.300 (33.02)	1.550 (39.37)
20	1.350 (34.29)	1.150 (29.21)	.900 (22.86)	1.600 (40.64)	1.850 (46.99)
24	1.550 (39.37)	1.350 (34.29)	1.100 (27.94)	1.800 (45.72)	2.050 (52.07)
26	1.650 (41.91)	1.450 (36.83)	1.200 (30.48)	1.900 (48.26)	2.150 (54.61)
30	1.850 (46.99)	1.650 (41.91)	1.400 (35.56)	2.100 (53.34)	2.350 (59.69)
36	2.150 (54.61)	1.950 (49.53)	1.700 (43.18)	2.400 (60.96)	2.650 (67.31)
40	2.350 (59.69)	2.150 (54.61)	1.900 (48.26)	2.600 (66.04)	2.850 (72.39)
44	2.550 (64.77)	2.350 (59.69)	2.100 (53.34)	2.800 (71.12)	3.050 (77.47)
50	2.850 (72.39)	2.650 (67.31)	2.400 (60.96)	3.100 (78.74)	3.350 (85.09)
54	3.050 (77.47)	2.850 (72.39)	2.600 (66.04)	3.300 (83.82)	3.550 (90.17)
56	3.150 (80.01)	2.950 (74.93)	2.700 (68.58)	3.400 (86.36)	3.650 (92.71)
60	3.350 (85.09)	3.150 (80.01)	2.900 (73.66)	3.600 (91.44)	3.850 (97.79)
66	3.650 (92.71)	3.450 (87.63)	3.200 (81.28)	3.900 (99.06)	4.150 (105.41)
70	3.850 (97.79)	3.650 (92.71)	3.400 (86.36)	4.100 (104.14)	4.350 (110.49)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/62, /65, /66, and /58 using appropriate hardware.
5. Numbers indicating every fourth cavity are stamped on side with the exception of number one contact shall be marked.
6. Termination layout on .020 (0.51 mm) modular grid.
7. Metric equivalents are in parentheses.
8. Optional undercut .020 (0.51 mm) maximum, on PCB side for cleaning purposes.

FIGURE 1. Connector, plug .100 (2.54 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Guide pins, type X guide sockets, jackscrews and jacksockets shall be made of corrosion resisting stainless steel per ASTM-A582 passivated per QQ-P-35 or shall be corrosion resistant copper nickel alloy (61 ±2% copper, 25 ±2% nickel, 2.5% max. other, and the balance zinc) and shall have a brinell hardness of 145 to 175. Type Y guide sockets shall be beryllium copper per QQ-C-550, nickel plated per QQ-N-290, class 2, 50 to 150 microinches.

Plating: The contact plating shall be per MIL-C-55302 or gold per MIL-G-45204, type II, grade C, class 1, over nickel plating per QQ-N-290, class 2, 50 to 150 microinches in the engaging area and gold per MIL-G-45204, type II, grade C, class 00, over nickel plating per QQ-N-290, class 02, 50 to 150 microinches in the termination area.

Contact identification: See figure 1.

Mating and unmating:
Standard insertion force contacts: The maximum mating force, in pounds, shall be the number of contacts multiplied by 0.56 and the withdrawal force, in pounds, shall be a minimum of 0.08 times the number of contacts and shall not exceed the measured insertion force.


Low insertion force contacts: The maximum mating force, in pounds, shall be the number of contacts multiplied by 0.25 and the withdrawal force, in pounds, shall be a minimum of 0.04 times the number of contacts and shall not exceed the measured insertion force.

Contact resistance: The average contact resistance of all contacts measured shall not exceed 0.010 ohm, and no individual contact pair shall have a resistance exceeding 0.020 ohm.

Dielectric withstanding voltage:
Sea level: 1,000 volts rms.
High altitude: 300 volts rms.

Current rating: 5.0 amperes maximum per contact.

Example of part number:

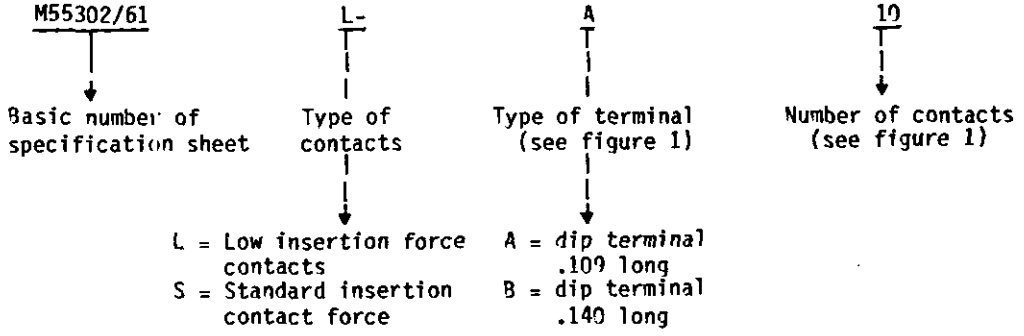

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - AS
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3411-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:47Z
Check the source to verify that this is the current version before use.