
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
CONTACT, WRAPPOST REMOVABLE TYPE

This specification sheet is approved for use by the Communications Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the contact described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

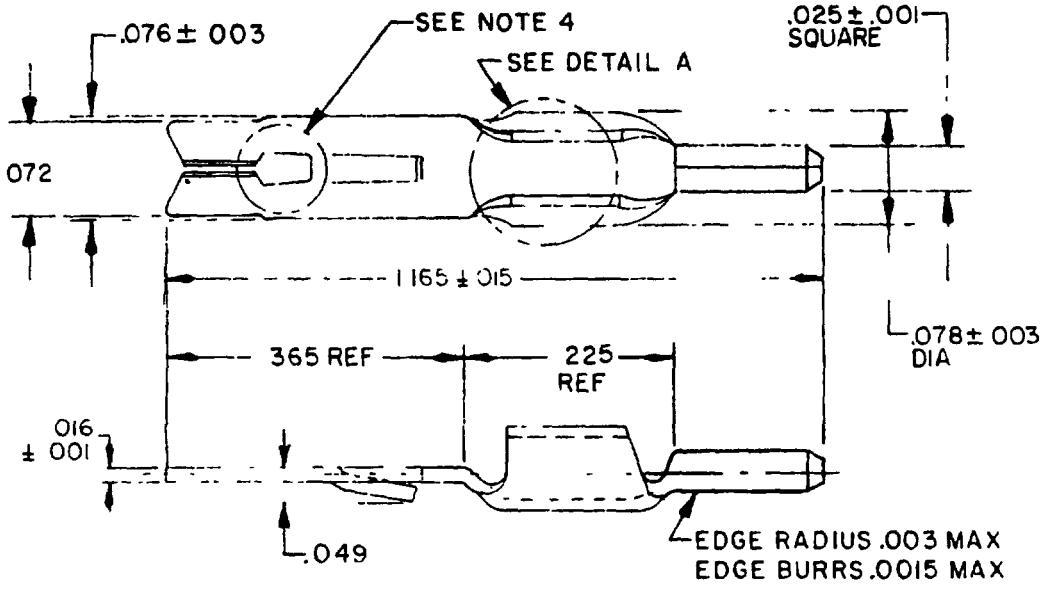


| INCHES | MM |
|---|---|
| .001 | .03 |
| .0015 | .038 |
| .003 | .08 |
| .015 | .38 |
| .016 | .41 |
| .025 | .64 |
| .049 | 1.24 |
| .072 | 1.83 |
| .076 | 1.93 |
| .078 | 1.98 |
| .225 | 5.72 |
| .365 | 9 27 |
| 1.165 | 29.59 |


Ⓒ FIGURE 1. Contact, hermaphroditic, wrappost removable.

Ⓒ denotes changes



FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

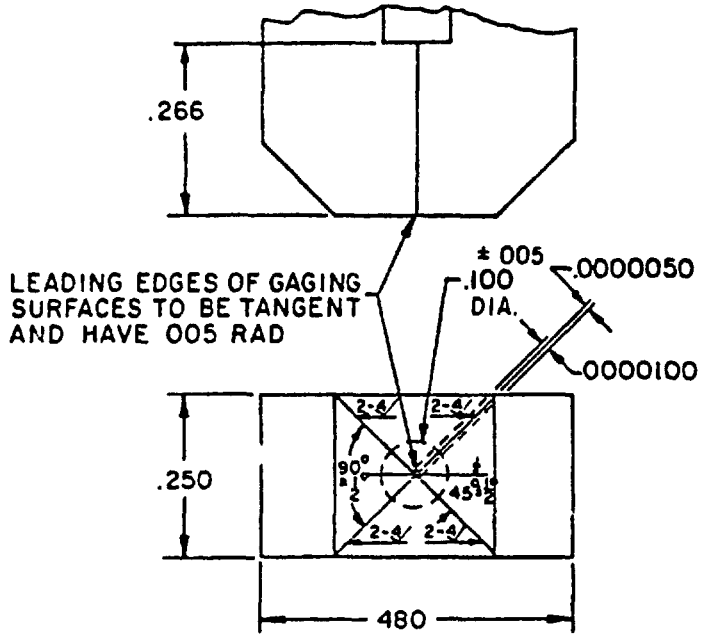


| INCHES | MM |
|---|---|
| .0000050 | .000127 |
| .0000100 | .000254 |
| .005 | .13 |
| .250 | 6.35 |
| .266 | 6.76 |
| .480 | 12.19 |

Material: Medium alloy steel bonded titanium carbide, rockwell-C-67-69

Configuration A, test gage.

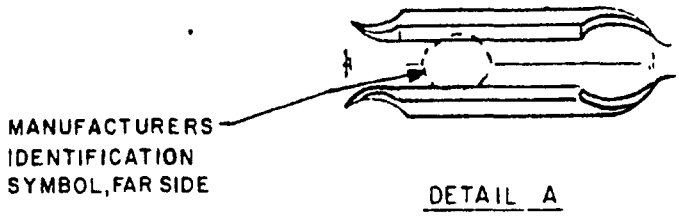


DETAIL A

Manufacturer's identification symbol shall be imprinted approximately as shown.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance shall be ±.005 (.13 mm) All dimensions are for parts after plating.
4 Contact relief hole configuration, optional.
5. Contact insertion and removal tool, MIL-T-81969/5-01 and MIL-T-81969/4-02.

(C) FIGURE 1 Contact, hermaphroditic, wrappost removable - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material. Phosphor bronze per QQ-B-750, composition "A".

Plating: The contact plating shall be gold per MIL-G-45204, type II, grade D, class 1, over nickel plating per QQ-N-290, class 2, 30 to 150 microinches.

Contact separating force (see configuration A):

Polished steel gage from unplated contacts: 1 ounce minimum.

Plated gold over nickel contacts (contact to contact): 2 to 10 ounces.

Current rating: 3 amperes, 24 AWG wire.

Wire size: For .025 square wrappost, wire sizes 24, 26, 28 and 30 are recommended (see MIL-STD-1130).

Identification of contact:

Contacts shall be permanently imprinted with manufacturer's symbol for purpose of identifying manufacturer's product ( see detail A).

Application. Contacts are to be used with connectors MIL-C-55302/95 and MIL-C-55302/96, and MIL-C-55302/99 through MIL-C-55302/101.

Part number. M55302/98-01.

Wrappost shall be tested in accordance with the applicable connector specification sheet.

Custodian:
Army - CR

Review activities:
Army - AT, AV, MI
DLA - ES

User activities:
Army - AR, ME

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-A141-8)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-C-55302/98C(CR)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Ft. Monmouth, N.J., 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

**BUSINESS REPLY CARD**

FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.