INCH-POUND

MIL-E-62484C(AT)
AMENDMENT 2
17 April 1992
SUPERSEDING
AMENDMENT 1
17 June 1991

MILITARY SPECIFICATION

EARTHMOVER, ARMORED COMBAT, M9
PROCESSING FOR SHIPMENT AND STORAGE OF

This amendment forms a part of MIL-E-62484C, dated 25 January 90, and is approved for use by the U.S. Army Tank Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 11

TABLE III, line 13: Delete "5120-00-708-3639 Drift pin", and substitute "2530-01-075-8292 Drift pin, track".

TABLE III, line 27: Delete "5120-00-198-5409 Key socket head screw IC-Z B" in its entirety.

TABLE III, line 31: Delete "4930-00-353-2478 Lubricating gun", and substitute "4930-01-298-3979, Grease gun, pneumatic".

PAGE 12

TABLE III - cont., line 15: Delete "4220-00-555-9006 Vest, 24 Inch", and substitute "4220-00-276-8926 Vest, life preserver".

AMSC N/A This document contains no data requirements. AREA PACK
DISTRIBUTION STATEMENT A. Approved for public release; Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.

3.4.1.3.6 Delete and substitute:

3.4.1.3.6 Windshield and motor. The windshield and motor shall be protected with plywood conforming to NN-P-530. Plywood shall be of ½ inch thickness and shall be suitable for exterior exposure. The cover shall be secured to the windshield and motor with strapping conforming to Type I, Finish B, 3/4 X 0.035 inches of QQ-S-781. Fiberboard strips, Class WR shall be placed between the windshield and the strapping. The windshield shall be secured in the down position (see figure 6).

PAGE 14

3.4.1.3.8.1, subparagraph d: Delete "Apron cylinder rod.", and substitute "Apron cylinder rods."

After subparagraph i: Add "j. Road wheel hubs.
k. Prop shaft.
l. Hatch cam roller."

3.4.1.3.8.2, subparagraph e: Delete "Dozer latch.", and substitute "Dozer latches."

Subparagraph g: Delete "Apron lockpin", and substitute "Apron lockpins."

Subparagraph h: Delete "Dozer lockpin.", and substitute "Dozer lockpins."

Subparagraph o: Delete "Hatch hinge.", and substitute "Tiedown shackles."

Subparagraph r: Delete "Operator's seat." and substitute "Operator's seat slides."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.

PAGE 32

* The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
31	31 Reprinted without change
32	32

Custodian:
Army - AT

Preparing Actitivity:
Army - AT

(Project PACK-A376)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:43Z
Check the source to verify that this is the current version before use.

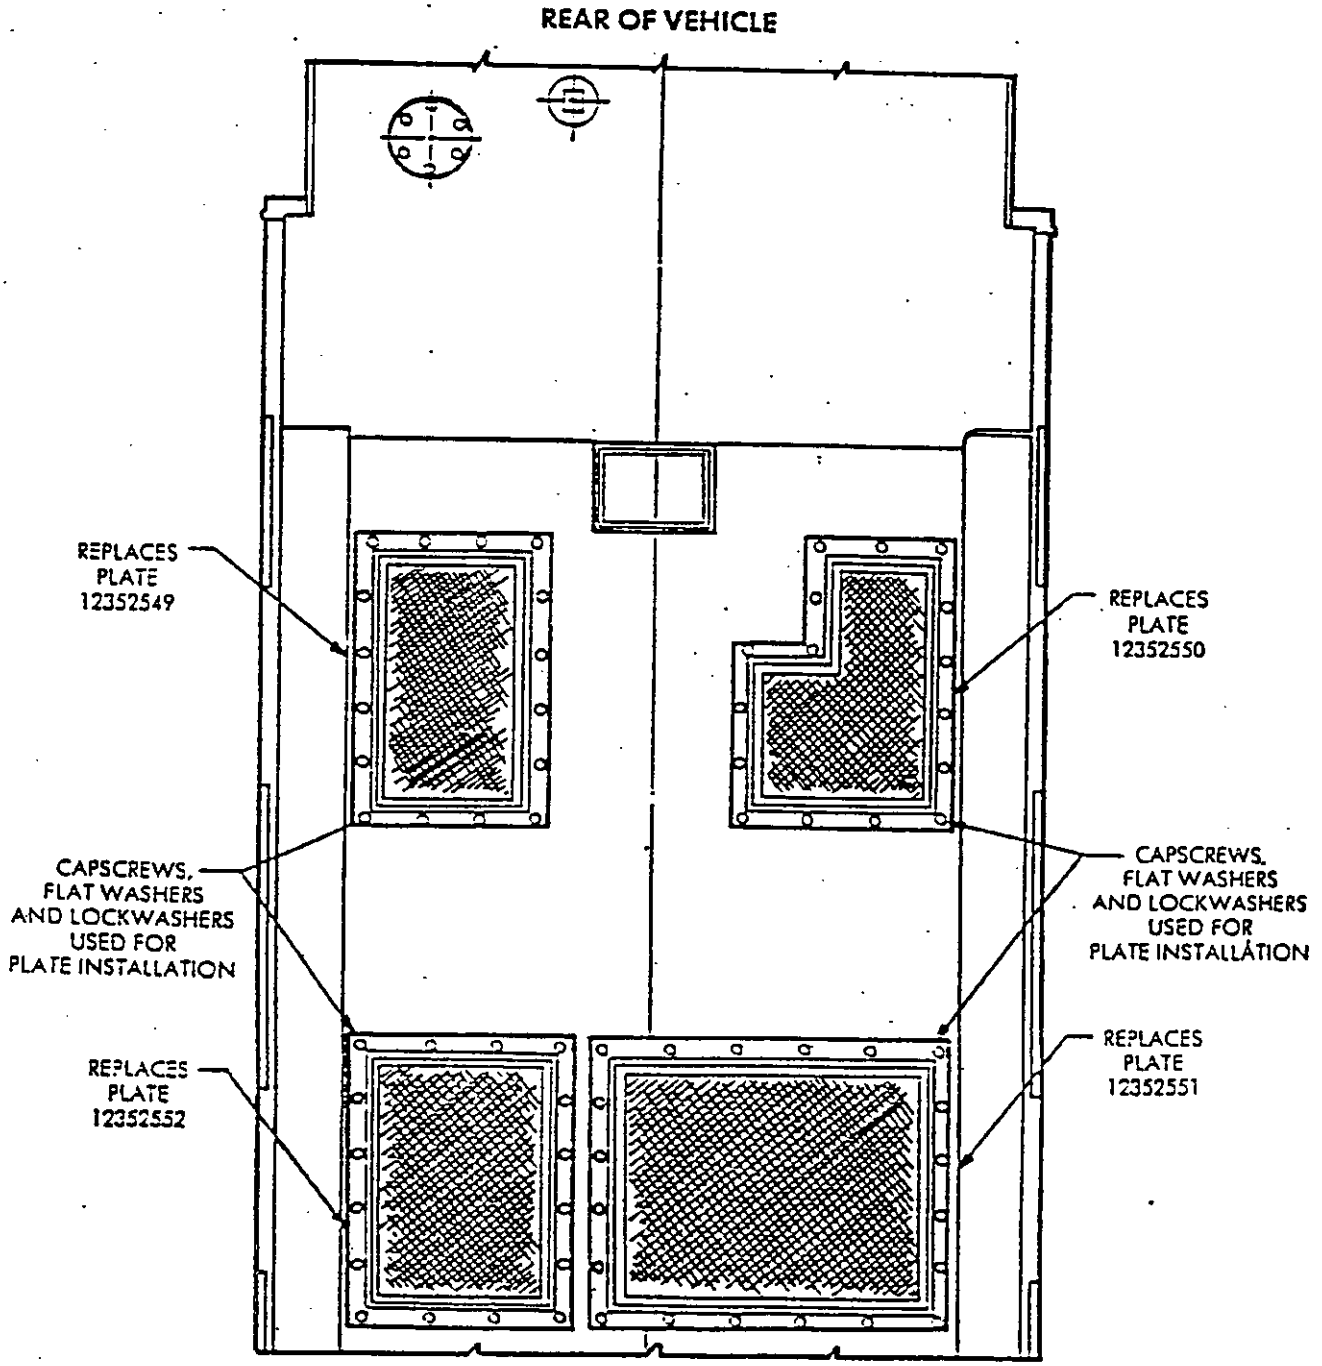


FIGURE 5. View of Vehicle Underside Ventilation Screens.

"Reprinted without change".

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:43Z
Check the source to verify that this is the current version before use.

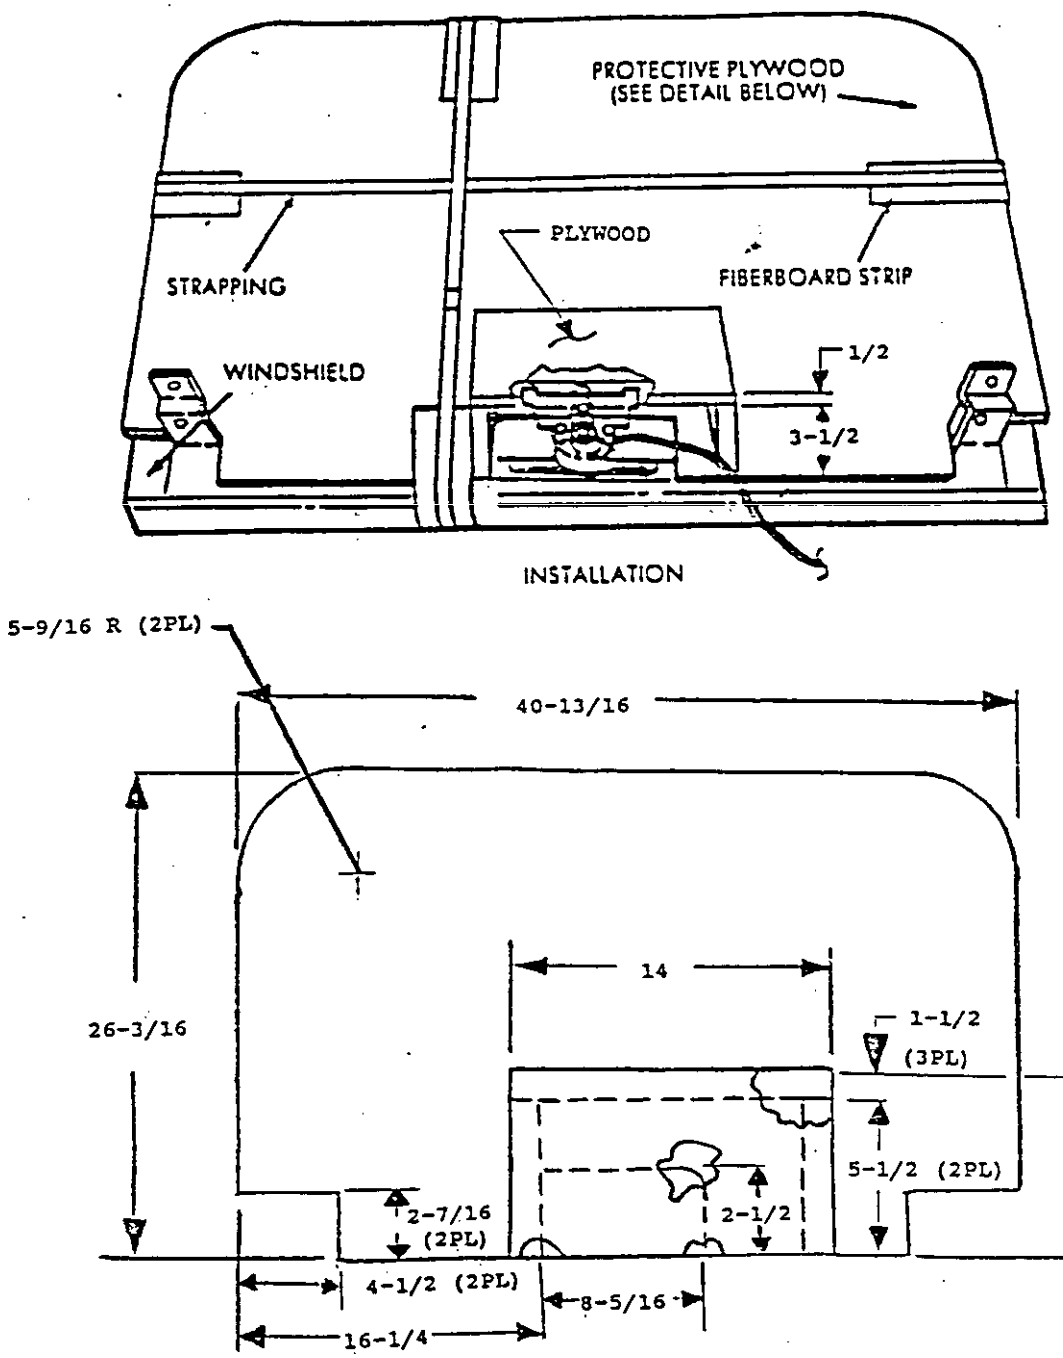


FIGURE 6. Protective plywood detail.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:43Z
Check the source to verify that this is the current version before use.