
MILITARY SPECIFICATION SHEET

# VALVE, SELECTOR, MANUALLY OPERATED, STOWABLE HANDLE

This specification is approved for use within the Army Missile Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the valve described herein shall consist of this specification and the latest issue of MIL-V-47322(MI).

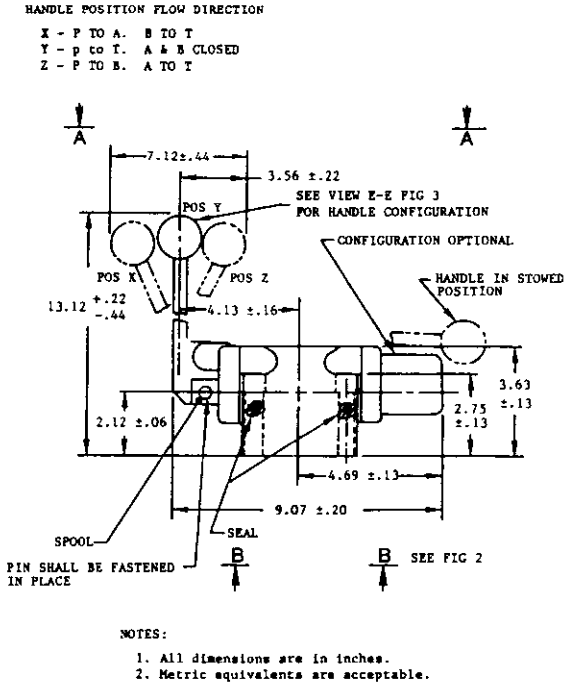



NOTES:
1. All dimensions are in inches.
2. Metric equivalents are acceptable.

**FIGURE 1. Valve selector.**


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

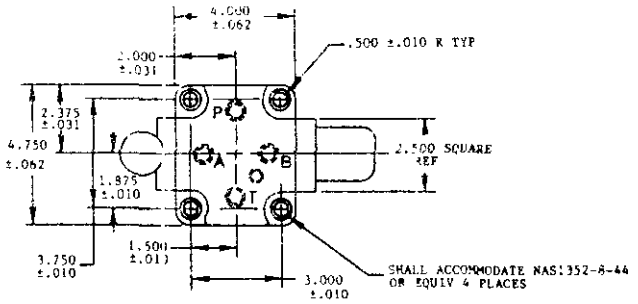






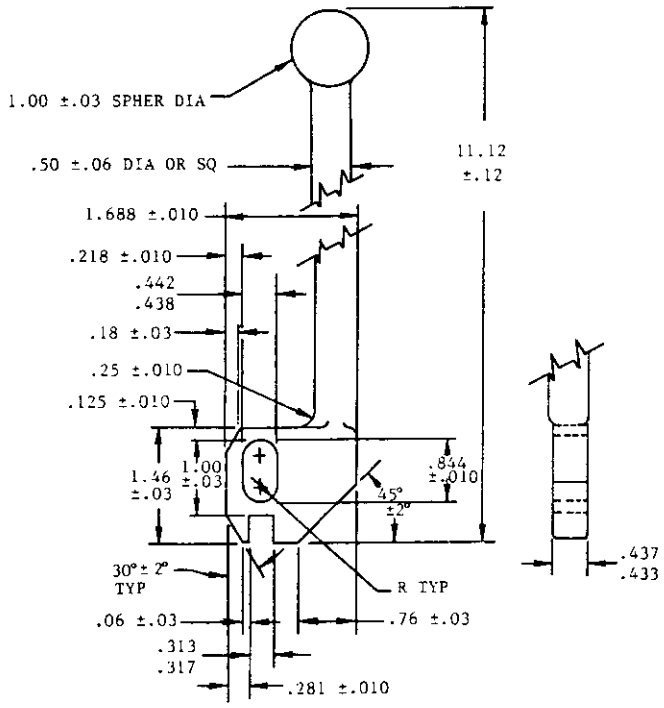

**FIGURE 2. View A-A, B-B and section C-C.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

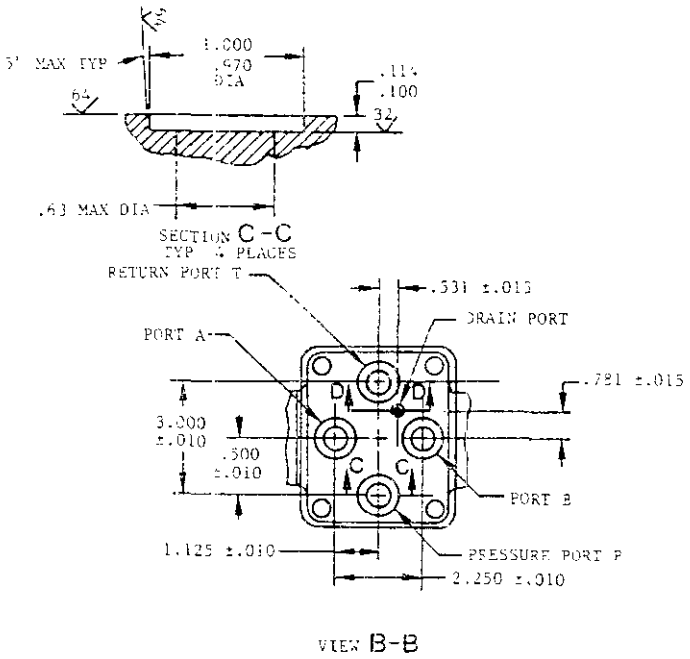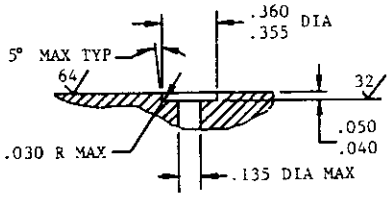


SECTION D-D




VIEW E-E

**FIGURE 3. Section D-D and view E-E.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

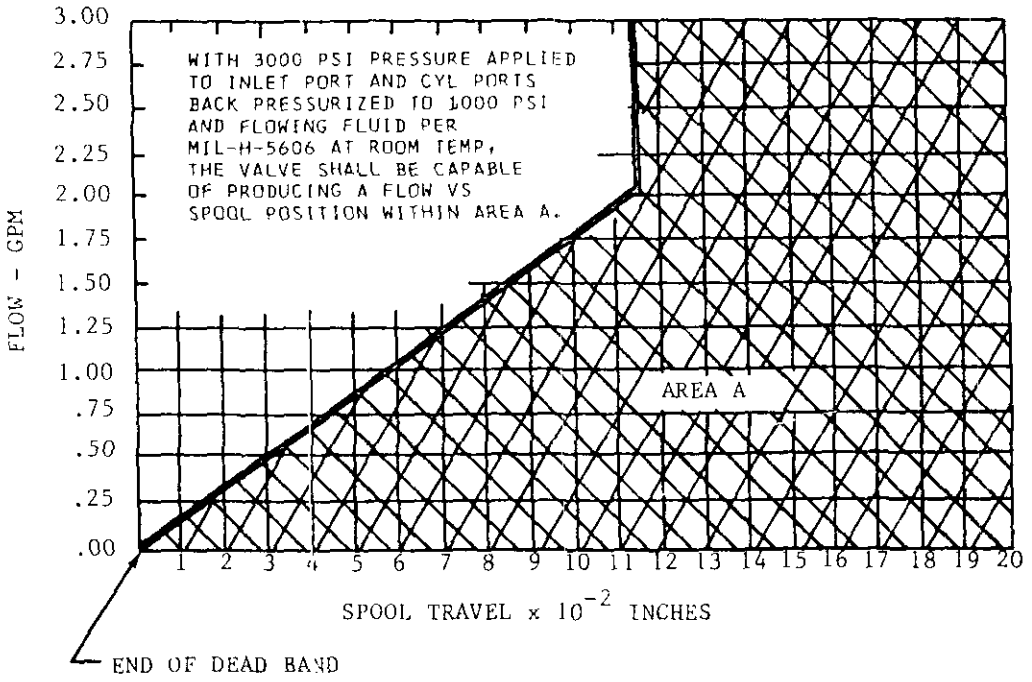



**FIGURE 4. Flow vs. spool travel.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:

Spool: Steel, commercial or alternate series 420 corrosion resistant steel, commercial.

Other metals: Metals used in the valve shall be protected to resist corrosion, except metal in constant contact with the fluid media.

Seals: Elastomers in accordance with MIL-P-25732.

Finish:

Spool: Nickel plate 0.005 inch minimum. Combined nickel and hard chrome plate 0.002 inch minimum after finishing. corrosion resistant steel, passivate, commercial.

Final finish: See table I.

Design and construction: The valve shall be designed to withstand all loads or combination of loads resulting from hydraulic pressure, temperature variations, gravitational forces, valve operation and installation of connection of lines.

Construction: Valve shall be sub-plate type construction.

Unit weight: 16.5 pounds (lb) maximum.

Mechanical requirement:

Internal leakage: Cylinder ports to tank side, mid-position of lever, 100 cubic inches per minute maximum at 3000 pounds per square inch (psi) pressure differential.

Proof and pressure: Proof and burst pressure specified are with all ports blocked.

Flow and pressure drop: Pressure side to tank side 250 psi drop at 3 gallons per minute (gpm). Pressure side to either port 100 percent open 50 psi drop at 3 gpm.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.

Flow vs spool travel: As shown on figure 4. Spring centered spool, cylinder ports blocked in mid position with pressure side open to tank or to supply of second selector valve.

Operating force: 10 lb maximum on lever.

Service life: 50,000 cycles. One cycle is operating lever 75 percent of stroke from neutral position and back to neutral with 3000 psi differential in the shut-off position.

Port designation: Ports shall be permanently marked as shown on figure 2, conforming to existing standard commercial practice.

Electrical requirements: N/A

Part number: M47322/3- (dash number from table I).

TABLE I. Dash numbers and final finish.

| Dash number | Final finish |
|---|---|
| -1 | Oil resistant paint, color blue |
| -2 | TT-P-1757 color Y, plus MIL-E-52798 color forest green |

Custodian:
Army - MI

Preparing activity:
Army - MI

(Project No. 4820-A006-03)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:09Z
Check the source to verify that this is the current version before use.